INCH-POUND
MIL-F-24704/5A(SH)
23 March 1992
SUPERSEDING
MIL-F-24704/5(SH)
30 November 1988

MILITARY SPECIFICATION SHEET

FLANGES, FOUR BOLT, INSERT SLEEVES FOR HYDRAULIC SYSTEMS


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-24704.

SCOPE

Scope. This specification sheet covers the requirements for insert sleeves for use with MIL-F-24704 flanges in hydraulic systems.

Classification. Insert sleeves shall be designated by part identification numbers as indicated below:

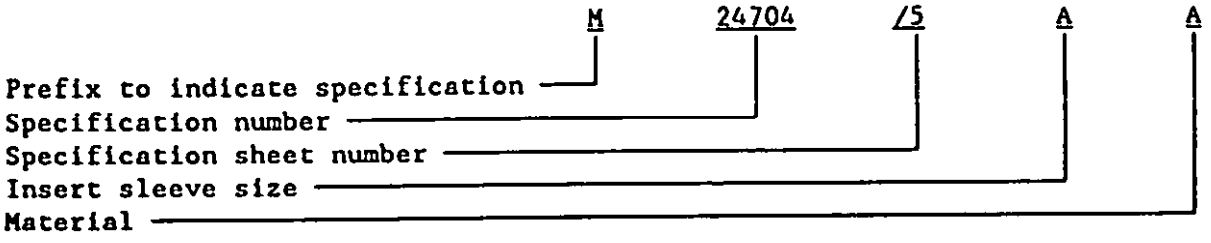

Example: The part identification number for an insert sleeve for a flange size of 1.5 inches made of aluminum alloy 6061 with QQ-A-200/8 or QQ-A-225/8 temper T6 would be written M24704/5AA.

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.


Insert sleeve size. The insert sleeve shall be designated by a letter in accordance with figure 1.

Material. The insert sleeve material shall be designated by a letter as indicated below:

A - Aluminum alloy 6061 in accordance with QQ-A-200/8 or QQ-A-225/8 temper T6.
C - Corrosion resistant steel (CRES), class 304 or 316 in accordance with ASTM A 473 or QQ-S-763.

Changes from previous issue. Revision letters are not used to denote changes due to the extensiveness of the changes. These changes included changing the term insert "ring" to insert "sleeve" throughout and changes made to the dimensions in the table and the tolerancing of the 45 degree chamfer angle on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

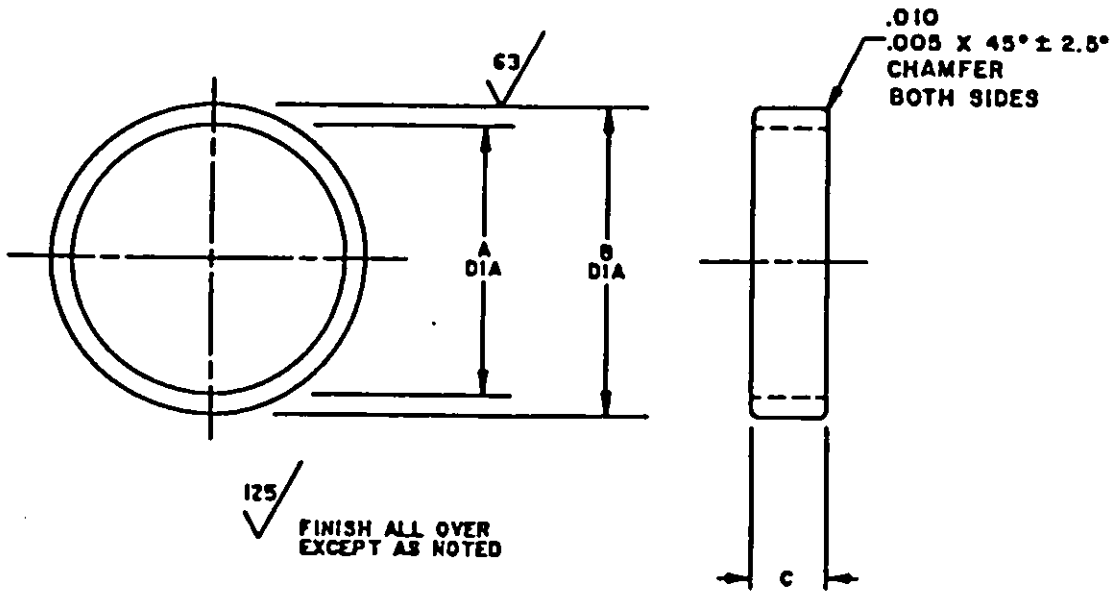

SLEEVE CODE	A +.005 -.000	B +.000 -.002	C +.000 -.010	FOR USE ON	
				FLANGE SIZE	FLANGE CODE
A	0.215	0.281	0.187	1.50	A
B	0.375	0.442	0.187	1.75	B
C	0.625	0.692	0.250	2.00	C
D	0.812	0.880	0.250	2.25	D
E	1.000	1.067	0.250	2.75	E
F	1.500	1.567	0.375	3.50	F
G	1.688	1.817	0.375	4.25	G

NOTE: All dimensions in inches.

FIGURE 1. Sleeve.

Preparing activity:
Navy - SH
(Project 4810-N082-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.