FED SUP CLASS
5365

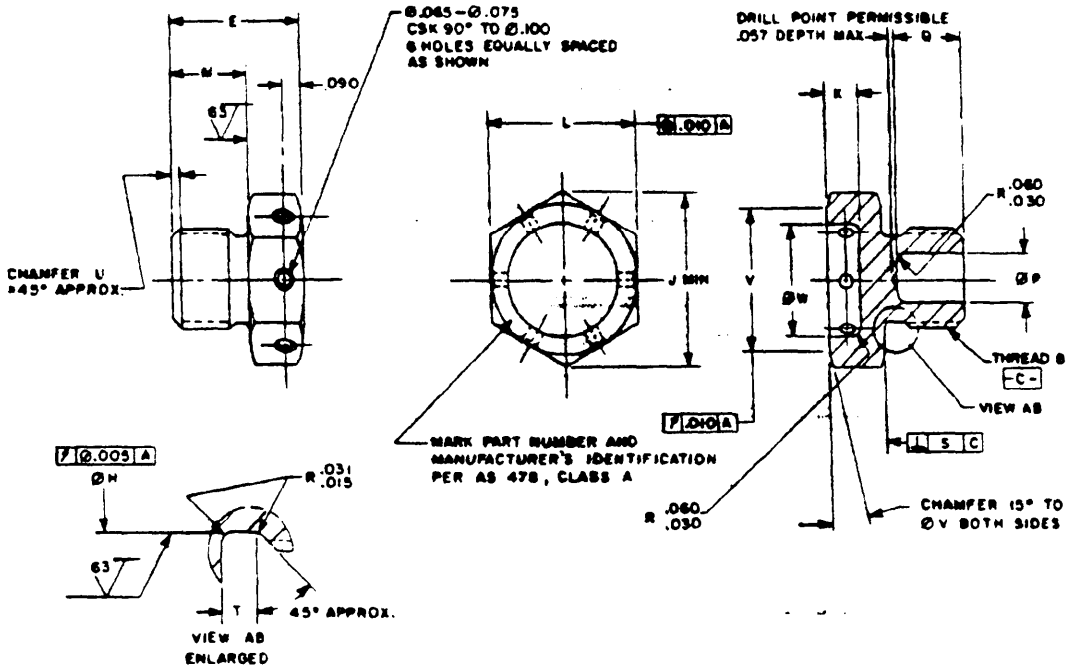


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	THREAD B	E	ØH +.002 -.003	J MIN	K	L	M	ØP	Q	S	T +.015 -.000	U	V	ØW	APPROX WEIGHT LB/100
01	.250-28 UNJF-3A	.560	.196	.482	.150	.430-.439	.320	-	-	.003	.063	.020-.050	.438	.250	1.183
02	.3125-24 UNJF-3A	.600	.250	.622	.150	.553-.564	.360	-	-	.003	.063	.020-.050	.562	.312	2.055
03	.375-24 UNJF-3A	.600	.312	.694	.150	.616-.627	.360	-	-	.003	.063	.020-.050	.625	.375	2.644
04	.4375-20 UNJF-3A	.660	.364	.766	.150	.679-.690	.400	-	-	.003	.075	.030-.060	.688	.438	3.657
05	.500-20 UNJF-3A	.670	.426	.837	.150	.741-.752	.400	.219	.340	.003	.075	.030-.060	.750	.500	4.277
06	.5625-18 UNJF-3A	.680	.481	.907	.150	.803-.814	.400	.219	.340	.003	.083	.040-.070	.812	.562	5.307
07	.625-18 UNJF-3A	.730	.544	.978	.160	.865-.877	.440	.312	.380	.003	.083	.040-.070	.875	.625	6.334
08	.750-16 UNJF-3A	.730	.660	1.121	.160	.990-1.002	.440	.438	.400	.003	.094	.040-.070	1.000	.750	7.995
09	.8125-16 UNJ-3A	.740	.722	1.191	.160	1.052-1.064	.440	.500	.400	.003	.094	.040-.070	1.062	.812	9.199
10	.875-14 UNJF-3A	.740	.733	1.263	.160	1.115-1.127	.440	.548	.400	.003	.107	.050-.080	1.125	.875	10.122
11	1.000-12 UNJF-3A	.780	.882	1.475	.190	1.301-1.314	.440	.657	.400	.005	.125	.050-.080	1.312	1.000	14.608
12	1.0625-12 UNJ-3A	.830	.945	1.475	.200	1.301-1.314	.480	.719	.400	.005	.125	.050-.080	1.312	1.000	15.891
14	1.1875-12 UNJ-3A	.830	1.070	1.619	.200	1.427-1.440	.480	.844	.400	.005	.125	.050-.080	1.438	1.125	18.582
16	1.3125-12 UNJ-3A	.840	1.195	1.833	.200	1.614-1.627	.680	.969	.400	.005	.125	.050-.080	1.625	1.312	23.416
18	1.500-12 UNJF-3A	.840	1.382	1.974	.200	1.738-1.752	.480	1.156	.480	.005	.125	.050-.080	1.750	1.438	27.369
20	1.625-12 UNJ-3A	.850	1.507	2.117	.200	1.863-1.877	.480	1.281	.400	.005	.125	.050-.080	1.875	1.562	31.827
24	1.875-12 UNJ-3A	.860	1.756	2.402	.200	2.113-2.127	.480	1.531	.400	.005	.125	.050-.080	2.124	1.812	40.949
28	2.250-12 UNJ-3A	.870	2.131	2.830	.200	2.488-2.502	.480	1.906	.400	.005	.125	.050-.080	2.500	2.188	56.454
32	2.500-12 UNJ-3A	.870	2.381	3.115	.200	2.738-2.752	.480	2.156	.400	.005	.125	.050-.080	2.750	2.438	67.139

REVISED (A) 30 SEPT 87
APPROVED 11 MAR 70

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY – AS Other Cust AIR FORCE – 11		PLUG, MACHINE THREAD DRILLED, PREFORMED PACKING MIL-S-8879 THREAD	MS9902
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES: MS 9404		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE — 5365-0120

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE – 99
DLA – IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:27Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5365

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5646.
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.
3. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES IN ACCORDANCE WITH ANSI B46.1.
4. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
5. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
6. DIAMETER 'B' SHALL BE FREE FROM TOOL MARKS.
7. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
8. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9902-01

DASH NUMBER

BASIC MS NUMBER

MS9902-01 INDICATES - PLUG, MACHINE THREAD - DRILLED, PREFORMED PACKING, MIL-S-8879 THREAD; .250-28 UNJF-3A.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 11 MAR 70 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-99
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for reprocure use shall be made from this document when applicable.

P.A. NAVY – AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE PLUG, MACHINE THREAD DRILLED PREFORMED PACKING MIL-S-8879 THREAD	MILITARY STANDARD MS9902
PROCUREMENT SPECIFICATION NONE	SUPERSEDES MS 9404		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5365-0120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.