
MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, FOR TYPE 2SWF CABLES

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirement for procuring the single cable connector described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).


ASSEMBLY, SINGLE CABLE CONNECTOR FOR
- 2SWF-3, M24231/26-001 SYM. NO. 1270
- 2SWF-4, M24231/26-002 SYM. NO. 1270.1
- 2SWF-7, M24231/26-003 SYM. NO. 1270.2

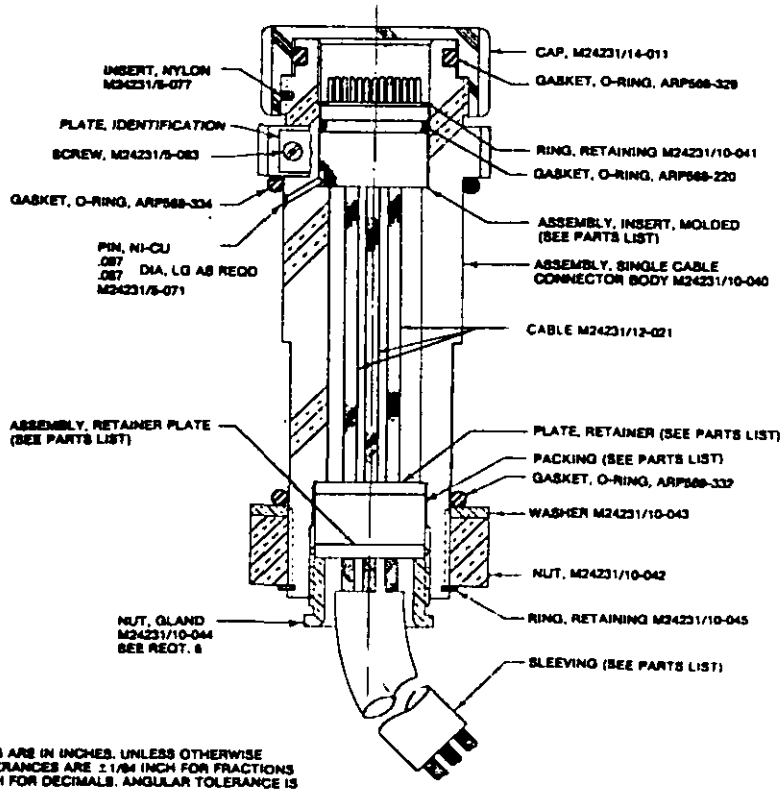


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.

SH6883

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

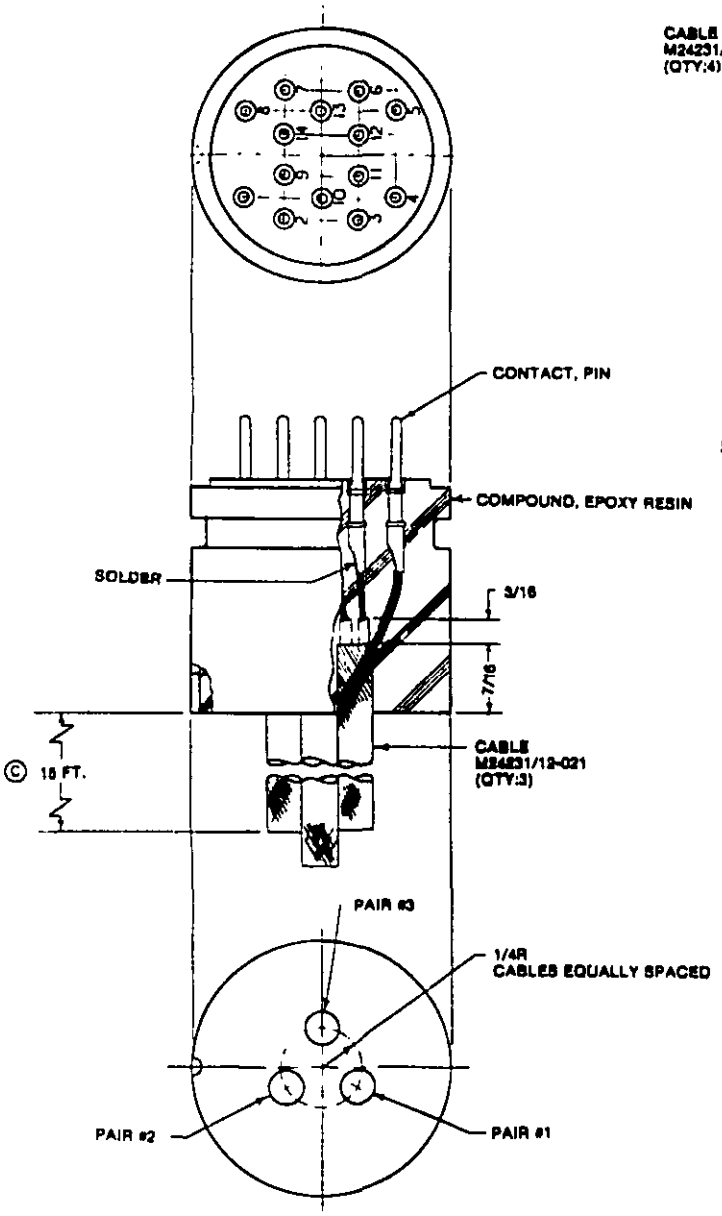


ASSEMBLY, INSERT, MOLDED
M24231/26-020

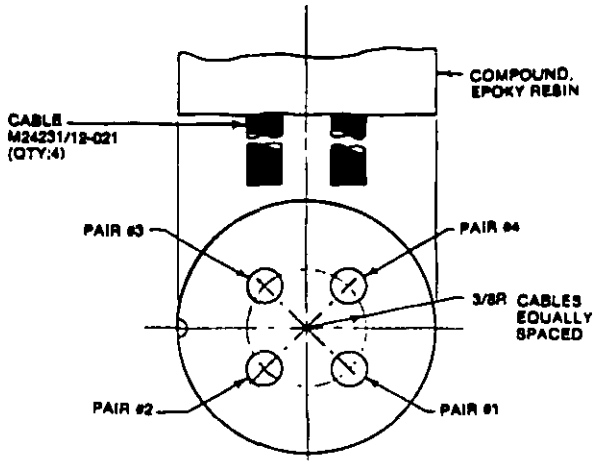

ASSEMBLY, INSERT, MOLDED
M24231/26-030
SAME AS M24231/26-020 EXCEPT AS SHOWN

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.

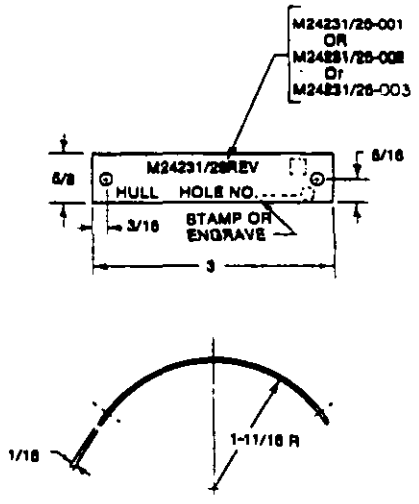


PLATE, IDENTIFICATION
M24231/26-011
M24231/26-012
M24231/26-013

DIMENSIONS NOT SHOWN ARE SAME AS M24231/10-010

SH9693-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

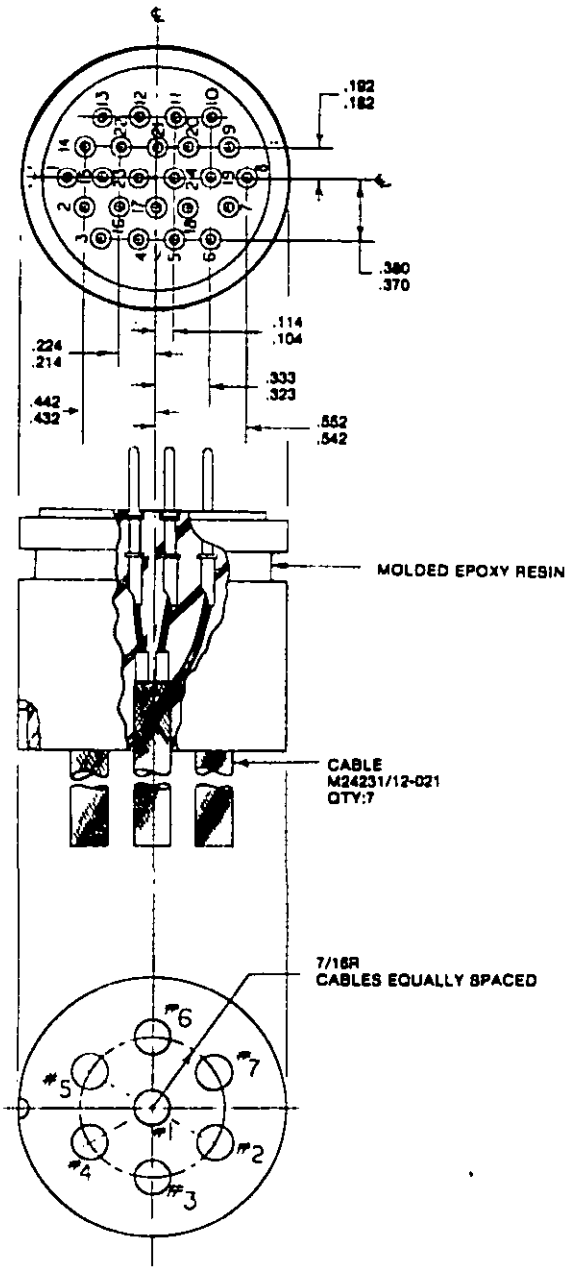

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

ASSEMBLY, INSERT, MOLDED
M24231/26-040

SAME AS M24231/26-020 EXCEPT AS SHOWN

SH9883-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I - Parts list.

Part No.	Name	Quantity for		
		M24231/26-001	M24231/26-002	M24231/26-003
M24231/26-001	Assembly, Single Cable Connector for 2SWF-3	1		
M24231/26-002	Assembly, Single Cable Connector for 2SWF-4		1	
M24231/26-003	Assembly, Single Cable Connector for 2SWF-7			1
M24231/26-011	Plate, Identification	1		
M24231/26-012	Plate, Identification		1	
M24231/26-013	Plate, Identification			1
M24231/26-020	Assembly, Insert Molded (14-Conductor)	1		
M24231/26-030	Assembly, Insert Molded (14-Conductor)		1	
M24231/26-040	Assembly, Insert Molded (24-Conductor)			1
ARP568-220	O-Ring Gasket	1	1	1
ARP568-329	O-Ring Gasket	1	1	1
ARP568-332	O-Ring Gasket	1	1	1
ARP568-334	O-Ring Gasket	1	1	1
M24231/5-071	Pin	1	1	1
M24231/5-077	Insert, Nylon	1	1	1
M24231/5-083	Screw	2	2	2
(C) M24231/10-011	Sleeving	15 ft	15 ft	15 ft
(C) M24231/10-021	Sleeving			
M24231/10-040	Single Cable Connector Body	1	1	1
M24231/10-041	Retaining Ring	1	1	1
M24231/10-042	Nut	1	1	1
(C) M24231/10-043	Washer	1	1	1
M24231/10-044	Gland Nut	1	1	1
M24231/10-045	Retaining Ring	1	1	1
M24231/10-054	Cap	1	1	
M24231/10-055	Cap			1
M24231/10-057	Shell	1	1	1
M24231/11-011	Packing, Type "J"	1	1	1
M24231/11-020	Assembly Retainer Plate, Type "J"	1	1	1
M24231/11-021	Retainer Plate, Type "J"	1	1	1
(C) M24231/12-021	Cable, Type 2SWU-1, 15 feet	3	4	7
M24231/14-011	Cap	1	1	1

REQUIREMENTS:

(C) 1. Dimensions and configuration: See Figures.
(C) 2. Any unused holes in retainer plates and packing shall be plugged with cable type 2SWU-1 in accordance with MIL-C-915/49 (Part number M24231/12-021).
3. Cable shall be marked with pin circuit identification numbers at the exposed ends.
4. Cables shall be protected after installation by a method approved by the procuring activity.
(C) 5. Single cable connectors are for use with cables 2SWF-3, 2SWF-4, and 2SWF-7 in accordance with MIL-C-915/48.
6. The gland nut shall be tightened until the packing tightens against cables. This can be determined by moving cables gently back and forth until the cable is seized by the packing. The gland nut shall be turned approximately one fourth of a turn more to hold cables in place. DO NOT OVERTIGHTEN the gland nut or attempt to tighten down metal to metal, as this can damage the cables.
7. Parts information: See table I.

Preparing activity:
Navy - SH
(Project 5935-N842-26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.