MILITARY STANDARD

MIL-STD-1320-165
(NAVY)


30 SEPTEMBER 1975

TRUCKLOADING OF HAZARDOUS MATERIALS

GUIDED MISSILE AGM-45 OR 45B (SHRIKE)
IN CONTAINER CNU-167/E
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/2BC
DIMENSIONS	
LENGTH	4[illegible]
WIDTH	3[illegible]
HEIGHT	4[illegible]
CUBE	3[illegible] CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

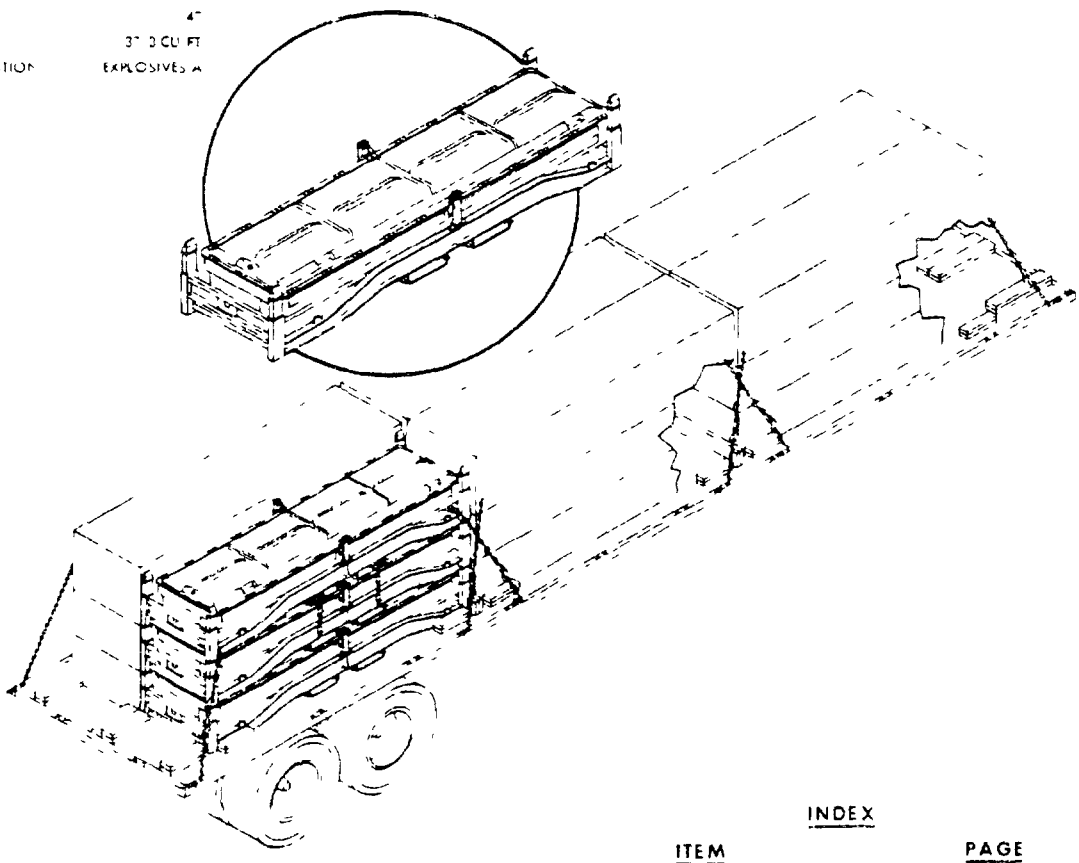

NOTE

1. UNLESS OTHERWISE SPECIFIED ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZ[illegible] AIRLIFT LOADING AND C[illegible] MILITAR[illegible] STANDARD[illegible] REFER TO [illegible] HDBK-3[illegible]

INDEX

ITEM	PAGE
GENERAL NOTES	
FTL 40 FT FLATBED	
LTL 40 FT FLATBED	4 & 5
BLOCKING & STRAPPING	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE AIR/SURFACE DIRECTION DATE

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

THI DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCK LOADING THE GUIDED MISSILES AGM-45A OR 45B (SHRIKE) IN THE CNU-
16 E CONTAINER

PROCEDURE AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED
IN THE EASTERN POSITION AT THE EXTREME REAR OF THE TRAILER DO NOT USE TRAILERS WITH METAL FLOORS

3 THE CONTAINERS ARE UNITIZED FORMING THE FLEET ISSUE UNIT LOAD WR-54 780

4 DO NOT EXCEED THE TOTAL NUMBER OF CONTAINERS IN A TRUCK LOAD ONE ADDITIONAL CONTAINER IS STRAPPED TO THE FLEET ISSUE
UNIT LOAD AS DESCRIBED ON PAGE

NOTE

WHEN THE TACTICAL TRANSPORTATION CYCLE IS COMPLETED THE TOP
CONTAINER IS REMOVED BY CUTTING THE TOP STRAPPING THE
LOOSE CONTAINERS SHALL BE UNITIZED PER WR-54 780 FORMING
A FLEET ISSUE UNIT LOAD

ONLY CHAIN AND LOAD BINDERS SHALL BE USED TO SECURE THE CONTAINERS TO THE TRAILER AND THEY SHALL MEET THE FOLLOWING
CONDITIONS

a CHAIN AND FITTINGS SHALL BE 3/8 INCH AND LOAD BINDERS 3/8 INCH CAPACITY

b CHAIN FITTINGS AND LOAD BINDERS SHALL HAVE A MINIMUM SAFE WORKING LOAD OF 5000 LBS

c LOAD BINDER SHALL BE SAFETY WIRED WITH 16 GAUGE SOFT ANNEALED IRON WIRE OR SECURED USING THE END PIECE OF THE
3/8 CHAIN

5 PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVORD OP 2165 AND REPORTED ON DD
FORM 626 THE CHAINS FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH GOUGING BENT LINKS WEAR AND ANY
OTHER NOTICEABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL
SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER

7 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER
THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE
TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPER'S DOCUMENTS TO A ACCESSIBLE AREA AND ATTACH
EXPLOSIVES PLACARD TO BOTH SIDES FRONT AND REAR OF TRAILER

9 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER MM-L-751 NAILS FF-N-105 TYPE II STYLE 10 COMMON BRIGHT

10 FOR GENERAL TRUCK LOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL STD-1320

FTL 40 FT TRAILER (FLATBED)


A FULL TRUCK LOAD OF MISSILES CONSISTS OF 18 CONTAINERS (9 UNIT LOADS) BLOCK AND TIE-DOWN AS SHOWN ON PAGE 5

TABLE I

MISSILE	UNIT LOAD WT (LBS) APPROX	TRUCK LOAD WT (LBS) APPROX
AGM-45A TO B4	3450*	31 050*
AGM-45A	3540*	31 860*
AGM-45A	3551*	31 967*
AGM-45B TO B4	3450	31 309
AGM-45BA	3591	32 319
AGM-45B	3500	32 421


*AVERAGE WT

Source: https://assist.dla.mil/ -- Downloaded: 2020-10-23T23:45Z
Check the source to verify that this is the current version before use.

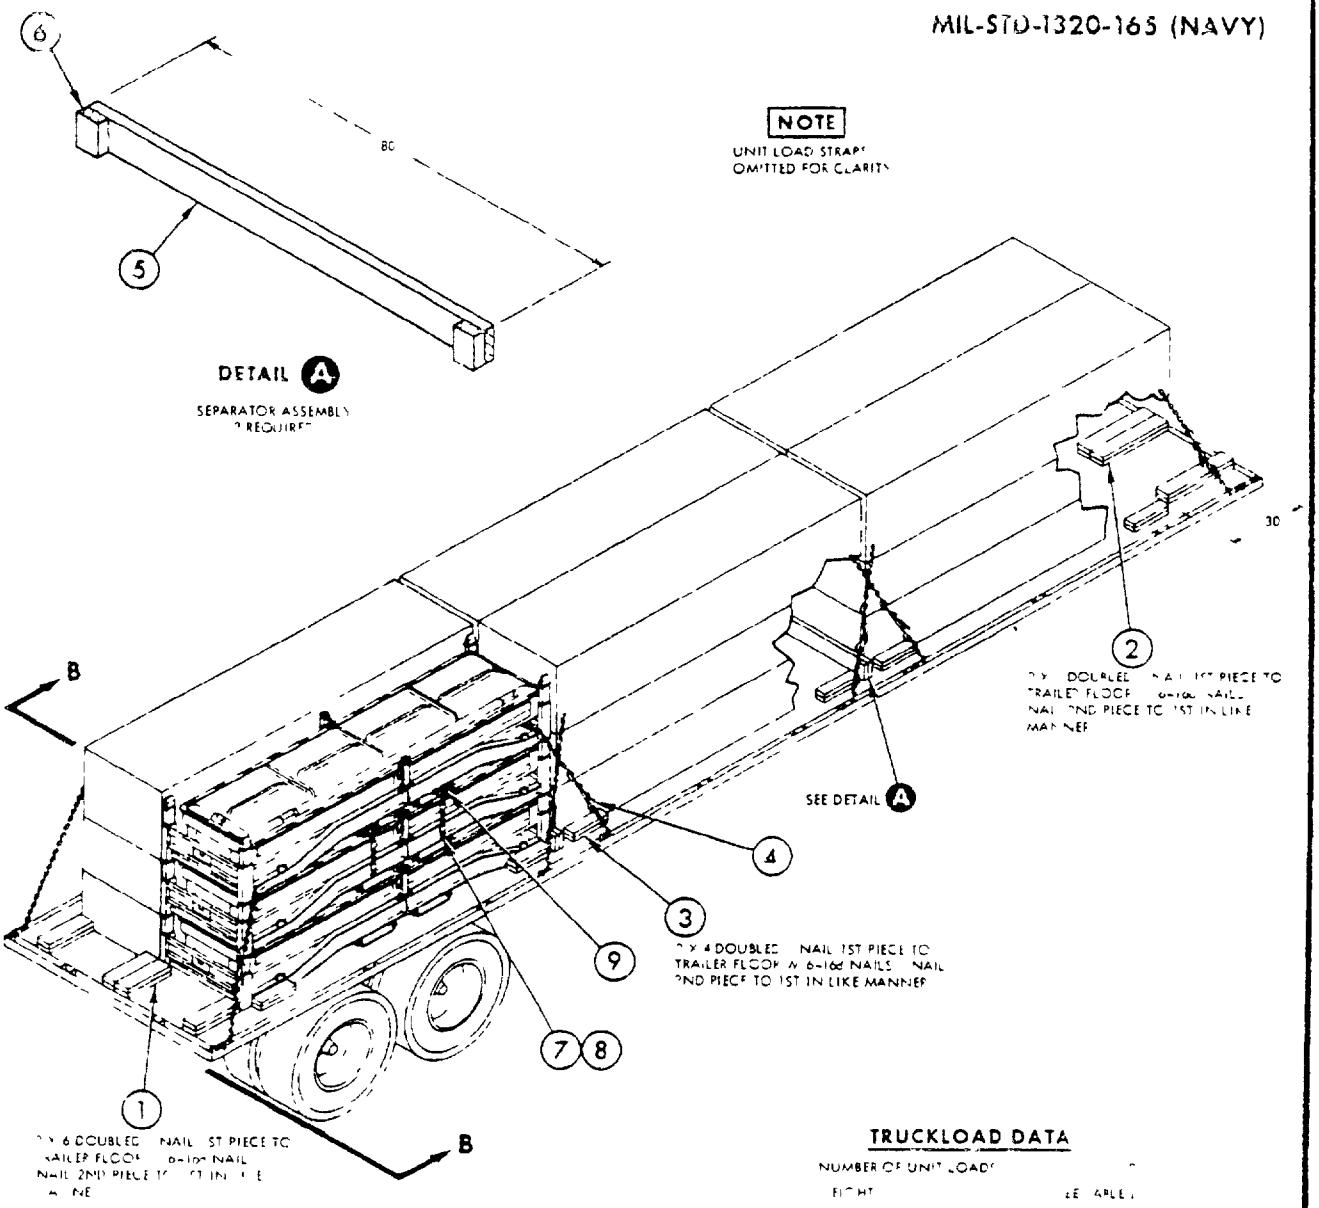

TRUCKLOAD DATA

NUMBER OF UNIT LOADS
WEIGHT
SEE TABLE I

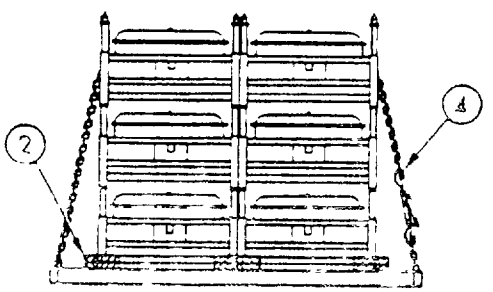

VIEW B-B

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
	LIST OF MATERIALS AND NAILING DATA				NAILS	
9	BATTEN	x 4 35				
8	SEAL	FOR 1 4 STRAP	1	-		
-	STRAP	1 4 USS A E	1			
6	CLEA	4	4			
5	CROSSMEMBE	x 6 x 80		EE		
4	CHAIN & CADBINDER	3 8 CAPACITY	6			
3	LEPPE	x 4 x 16	4	EE FIELD NOTE		
2	FLOOR BACK OF CAB			EE FIELD NOTE		
1	AFT BACK OF CAB	x 6 20		EE FIELD NOTE		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123.452
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (FLATBED)

HEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED FROM TABLE II AND POSITION THE UNIT LOADS ON THE TRAILER ACCORDINGLY.


HEN BLOCKING THE FRONT AND REAR OF 5 UNIT LOADS OR LESS USE 4 X 6 X 30 INCH BACK UP CLEATS.

WHEN THE LOAD PLAN REQUIRES THE STACKED TO BE 5 UNIT LOADS HIGH (THREE CONTAINERS HIGH) THEY SHALL BE STRAPPED TOGETHER AS SHOWN ON PAGE 7.

4. THE LTL SHOWN ON PAGE 5 IS FOR 5 UNIT LOADS AND THE LTL LOAD SHOWN ON PAGE 6 IS FOR 3 UNIT LOADS. THIS DOES NOT LIMIT LTL SHIPMENTS TO THIS QUANTITY. SHIPMENTS MAY CONSIST OF A GREATER OR LESSER NUMBER OF UNIT LOADS. ACTUAL SHIPPING REQUIREMENTS WILL DETERMINE THE NUMBER OF UNIT LOADS TO BE SHIPPED. THE LOAD PATTERN, BLOCKING, BRACING AND TIE DOWNS SHALL BE IN ACCORDANCE WITH THE APPROPRIATE PARTS OF THIS MILITARY STANDARD AND THE GENERAL RULES LOADING DOCUMENT, MIL-STD-1320 (NAVY).


TABLE II


LOAD PATTERN*

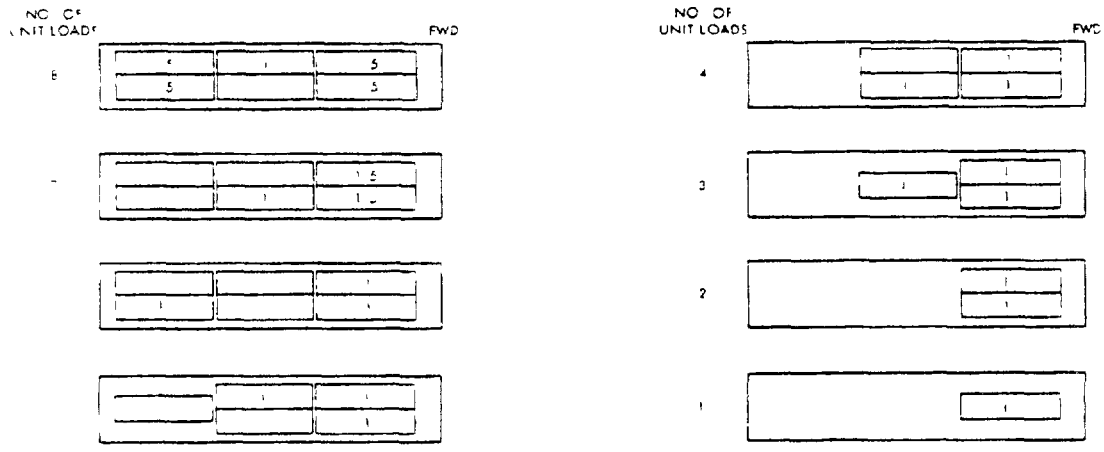

* LOAD PATTERN IS THE FLOOR PLAN FOR THE LOAD. THE NUMBER IN THE BLOCKS IS THE NUMBER OF LAYERS OF UNIT LOADS IN THE STACK. THE NUMBER 5 INDICATES THAT THE STACK IS 5 UNIT LOADS HIGH (OR THREE CONTAINERS HIGH). SEE GENERAL NOTE 4 AND NOTE, PAGE 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

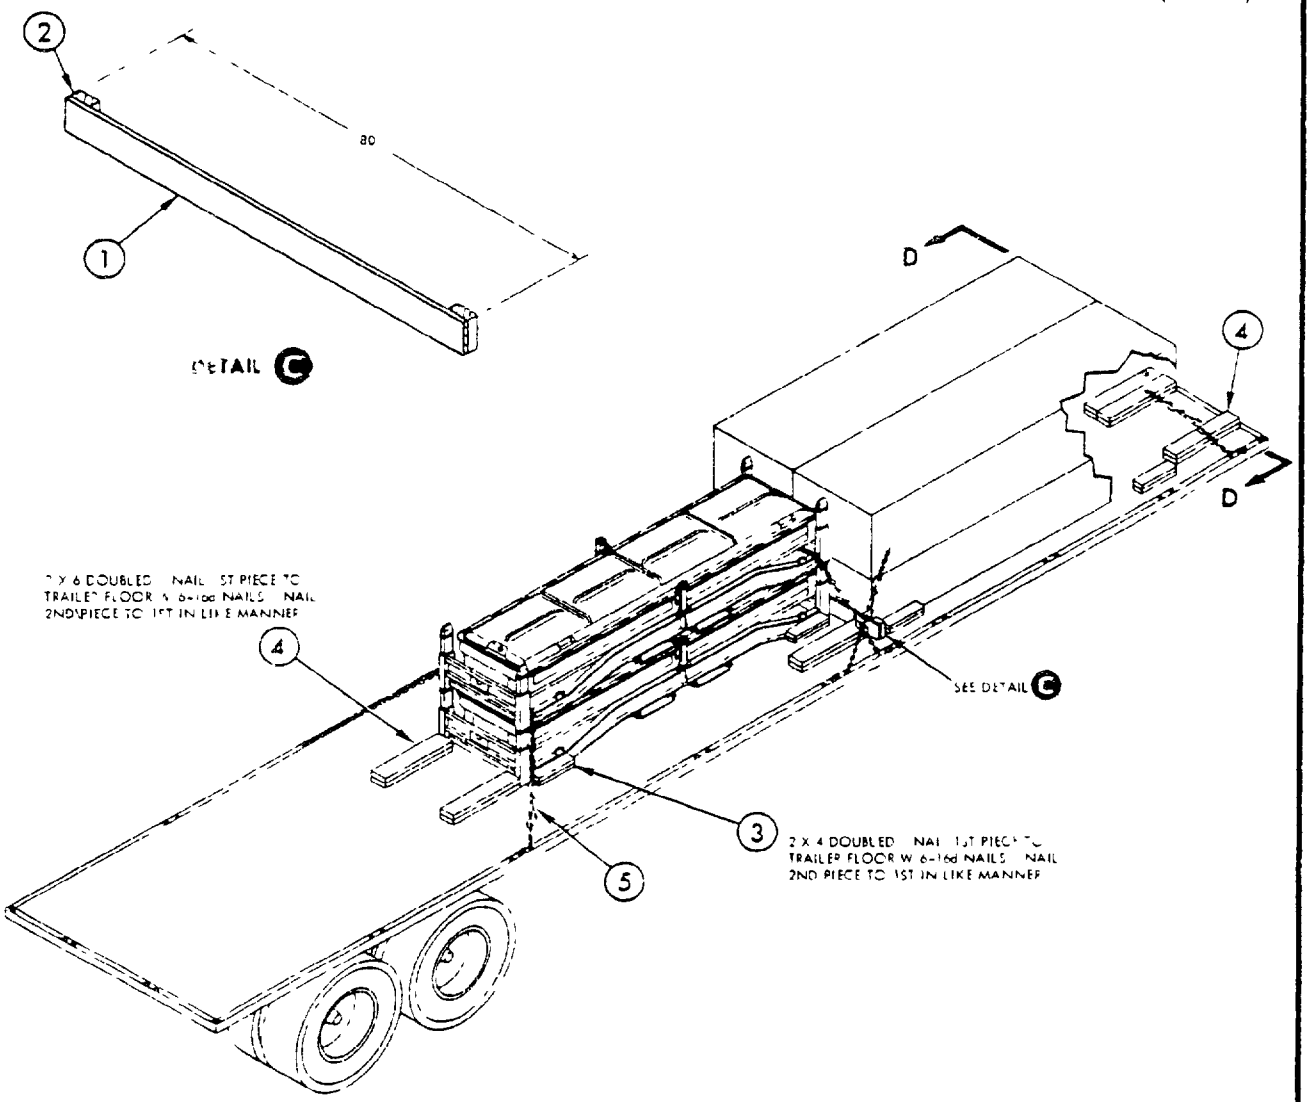

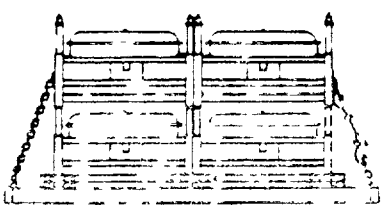

VIEW D-D

PIECE NO	DESCRIPTION	SIZE	NO PC REQD	NAIL TO	NUMBER AND SIZE NAILS
5	CHAIN & LOADBINDER ASSEMBLY		4	-	-
4	BACKER CLEAT	2 x 6 - 30	4	SEE FIELD DATA	
3	SLEEPER	2 x 4 - 19		SEE FIELD DATA	
2	CLEAT	2 x 4 -			
	TOTAL BOARD FEET				
LIST OF MATERIAL AND NAILING DATA					


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

STACKING AND STRAPPING PROCEDURE

POSITION THE THIRD CONTAINER ON TOP OF THE UNIT LOAD AS SHOWN IN DETAIL E. MAKE CERTAIN THE SUPPORT POSTS ARE PROPERLY ENGAGED.


POSITION TRAPPING THROUGH THE FOUR POCKETS OF THE TOP CONTAINER OF THE UNIT LOAD AND THROUGH THE FOUR POCKETS OF THE MIDDLE CONTAINER.

TENSION STRAPPING AND DOUBLE NOTCH SEAL.

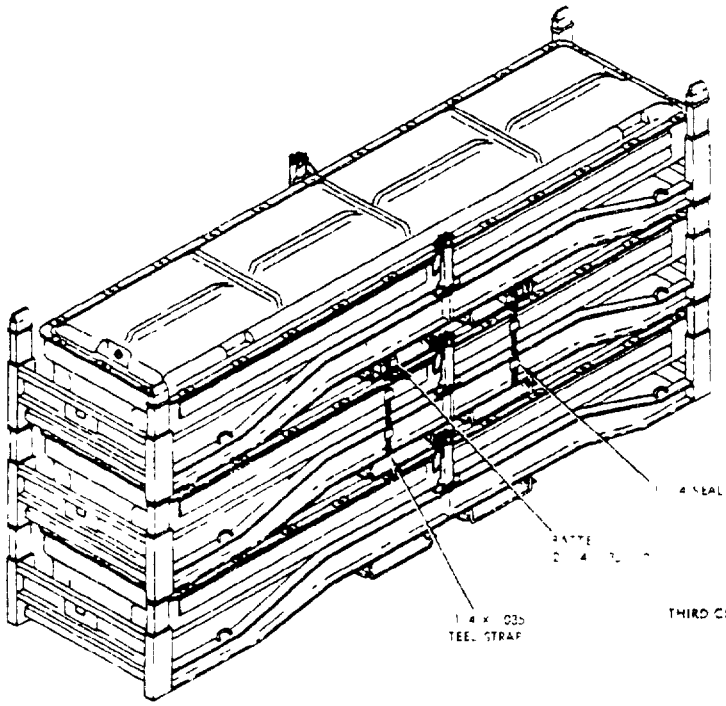

NOTE

UNIT LOAD STRAPS OMITTED FOR CLARITY

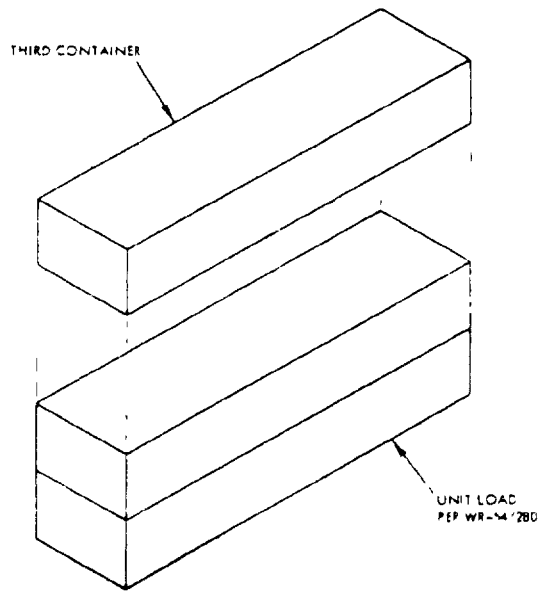

DETAIL E

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

MIL-STD-1320-165 (Navy)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 86 1426

REPLACES EDITION OF 1 OCT 84 WHICH MAY BE USED

S/N 0102 014 1801

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
Naval Weapons Station Earle (803)
Naval Weapons Handling Laboratory
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.