MILITARY STANDARD

MIL-STD-1320-185

(NAVY)


TRUCKLOADING

PHOENIX GUIDANCE SECTION
IN CONTAINER CNU-234/E

4 JANUARY 1978

CONTAINER DATA

DIMENSIONS	84 L X 31.7 W X 33.2 H
CUB	51.7 CU FT
GROSS WEIGHT (APPROXIMATE)	792 LBS
DRAWING NUMBER	799AS100
DOT HAZARD CLASSIFICATION	NONE (INERT)

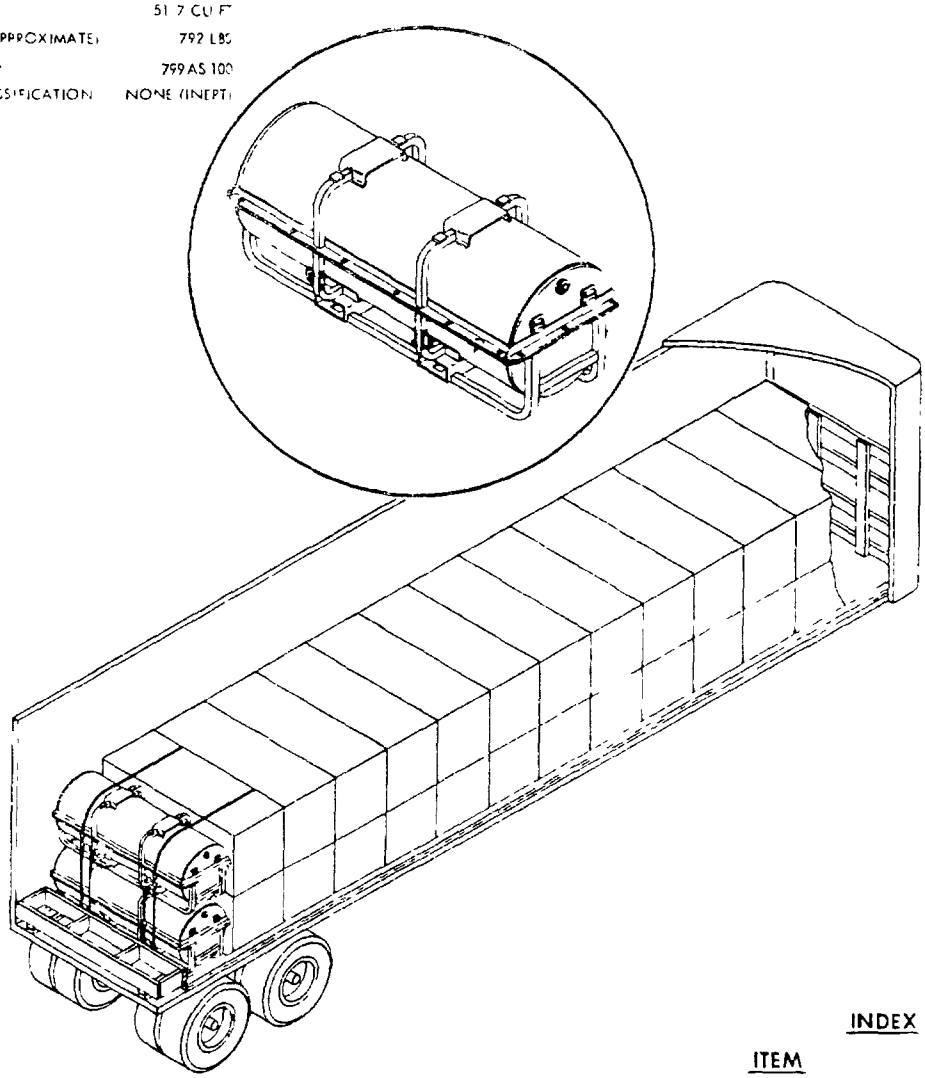

NOTE

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. REFER TO REFERENCE TO ASSOCIATED PALLETIZING
3. REFER TO LOADING AND CARLOADING MILITARY
4. THE DASH REFER TO INDEX TO STANDARDS MIL-HDBK-236 NA

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL	2 & 3
LTL	4
STRAPPING	5

FSC 8140

AUTHORIZED AND RELEASED

FOR HIGHWAY SHIPMENTS ONLY.

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) 1/4/78 DATE

SIGNATURE AIR SYSCOM BY DIRECTION 1/4/78 DATE

ORIGINATOR Charles McBride 1/4/78 DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE PHOENIX GUIDANCE SECTION WHEN IT IS IN THE CNU-234/E CONTAINER

2 THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44, AND 45 FT VAN TRAILERS WITH NAILABLE OR NON-NAILABLE FLOORS. ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE WESTERN POSITION (AT THE EXTREME REAR OF THE TRAILER).

3 THE CONTAINERS WHEN STACKED TWO HIGH SHALL BE STRAPPED TOGETHER IN UNITS OF TWO AS SHOWN ON PAGE 3.

4 THE REAR BLOCKING ASSEMBLY (DETAIL B) SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD.

5 WHEN A TRAILER HAS NON-NAILABLE FLOORS AND SLEEPERS CANNOT BE NAILED TO THE FLOOR, SUBSTITUTE FILLER ASSEMBLY (DETAIL C) FOR THE SLEEPERS. THE FILLER ASSEMBLIES SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER WALLS. ONE-HALF INCH SLACK IS PERMITTED.

6 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND PERMISSIBLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.

7 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL TRAILER DOORS.

8 APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER: MIL-L-7151; NAILS: FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON, BRIGHT; STRAPPING: QQ-S-781, TYPE I, FINISH A, B OR C.

9 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCK LOADING DOCUMENT, MIL-STD-1320 (NAVY).


FTL 40, 42, 44, & 45 FT TRAILERS (VAN)

1 A FULL TRUCKLOAD FOR A 40 FT TRAILER IS 28 CONTAINERS OF GUIDANCE SECTIONS AND IS INCREASED ON PAGE 3. A FULL TRUCKLOAD FOR OTHER LENGTH TRAILERS IS:


TRAILER LENGTH	NO. OF CONTAINERS	TRUCKLOAD WEIGHT APPROX
42	28	22,176
44	30	23,344
45	32	24,344

BLOCK AND BRACE ALL TRAILERS USING THE PRINCIPLES SHOWN ON PAGE 3.

2 WHEN THE CONTAINERS ARE TWO HIGH AT THE REAR OF THE LOAD, THE LAST TWO STACKS OF CONTAINERS SHALL BE STRAPPED TOGETHER WITH TWO 1 1/4 X .035 STEEL STRAPS, TENSIONED AND SEALED WITH TWO SEALS DOUBLE CRIMPED EACH STRAP. THESE STRAPS ENCIRCLE THE TWO STACKS OF CONTAINERS 4 CONTAINERS PASSING OVER THE TOP OF THE TOP TWO CONTAINERS AND UNDER THE BODIES OF THE BOTTOM TWO CONTAINERS. TENSION STRAPS AND ALSO WITH TWO DOUBLE CRIMPED SEALS EACH STRAP. THESE CONTAINERS SHOULD BE STRAPPED TOGETHER IN PLACE. ATTACH TO EACH STRAP IN A CONSPICUOUS PLACE A SUITABLE TAG CARRYING THE FOLLOWING INSTRUCTIONS: CUT AND REMOVE THIS STRAP BEFORE UNLOADING VEHICLE.

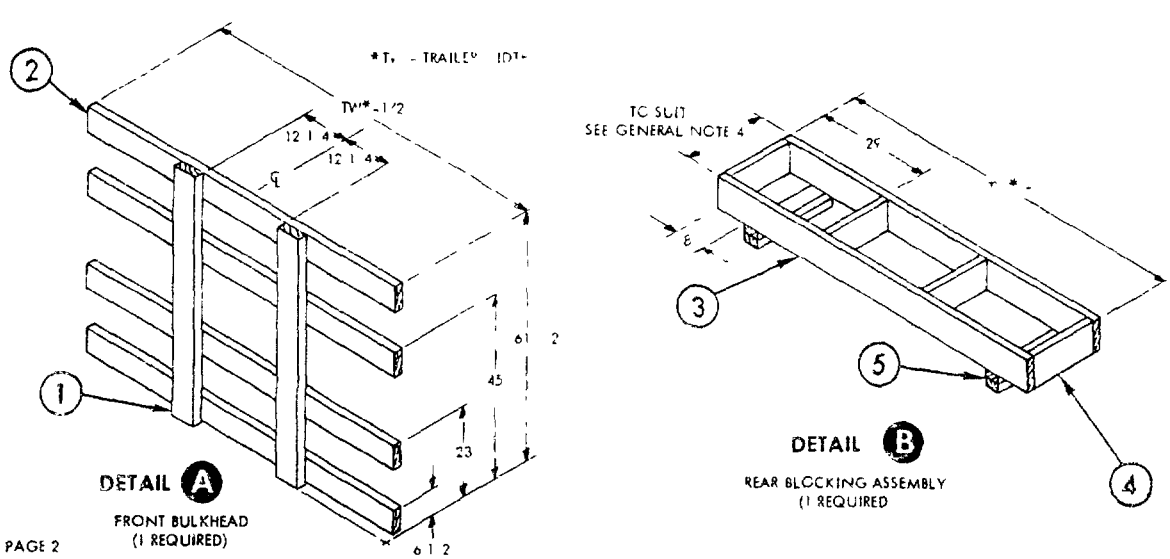


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

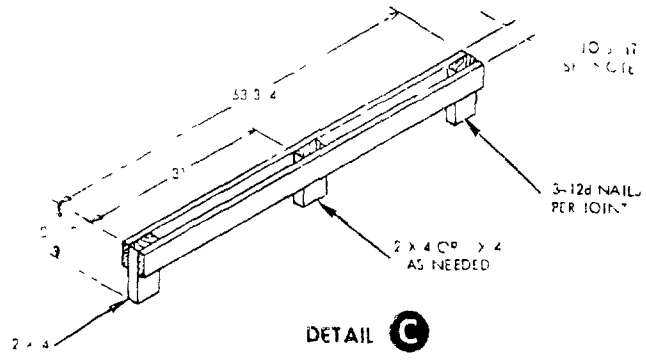

DETAIL C


FILLER ASSEMBLY
(FOR TRAILERS WITH NON-NAILABLE FLOORS)

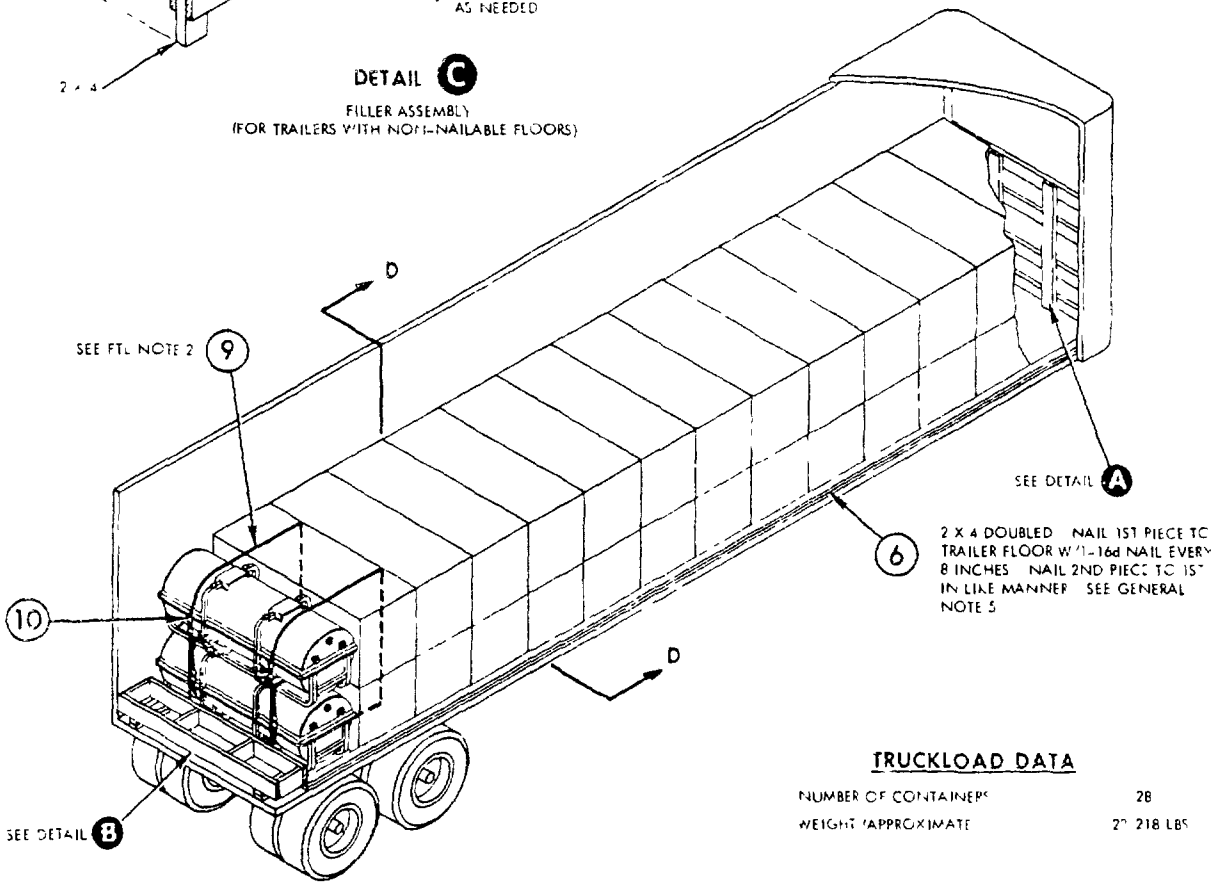

TRUCKLOAD DATA

NUMBER OF CONTAINERS	28
WEIGHT (APPROXIMATE	2? 218 LBS

*TW = TRAILER WIDTH

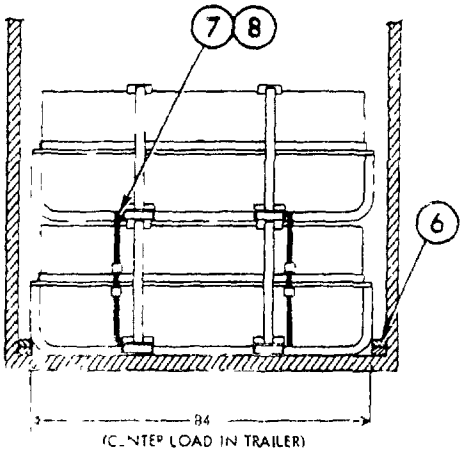

SECTION D-D

PIECE NO	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
10	SEAL	FOR 1 1/4 STRAP	4	-	-	-
9	STEEL STRAP	1 1/4 X .035 X 27 1/2 FT	2	-	-	-
8	SEAL	FOR 1 1/4 STRAP	56	-	-	-
7	STEEL STRAP	1 1/4 X .035 X 13 1/2 FT	28	-	-	-
6	SLEEPER	2 X 4 X RANDOM LENGTHS	140 FT	SEE FIELD NOTE		
5	SUPPORT	2 X 4 TO SUIT	4	3	2/JOINT	10d
				4	3/PIECE	10d
4	STRUT	2 X 8 TO SUIT	4	SEE 3	-	
3	CROSS MEMBER	2 X 8 X TW*-1	2	4	3/JOINT	16d
2	HORIZONTAL	2 X 6 X TW*-2 "2	4	SEE 1	-	-
1	VERTICAL	2 X 6 X 61 1/2	2	2	4/JOINT	10d

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

LTL ALL LENGTH TRAILERS (VAN)

1. WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD DECREASE THE NUMBER OF CONTAINERS IN THE SECOND LAYER STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD BLOCK AND BRACE USING THE PRINCIPLES SHOWN ON PAGE 3
2. WHEN THE SECOND LAYER HAS BEEN REMOVED DECREASE THE NUMBER OF CONTAINERS STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD BLOCK AND BRACE AS SHOWN FOR THE LTL BELOW


WARNING

DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS WHEN BLOCKING BY THIS METHOD TRAILERS MUST HAVE NAILABLE FLOORS

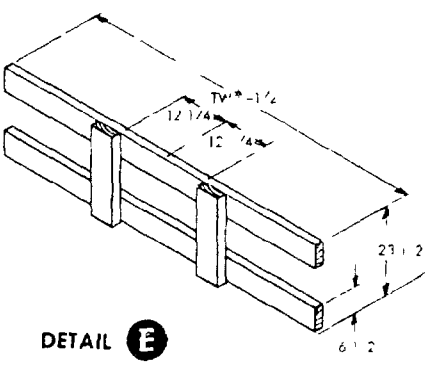

DETAIL E

REAR BLOCKING
(1 REQUIRED)

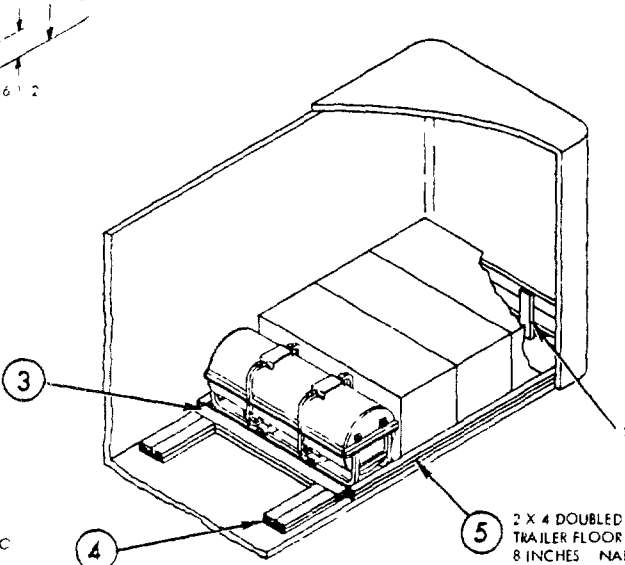

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

* TW - TRAILER WIDTH


PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
5	SLEEPER	2 X 4 X 25 FT (RANDOM LENGTHS)	-	SEE FIELD NOTE		
4	BACKUP CLEAT	2 X 6 X 30	8	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 84	2	SEE FIELD NOTE		
2	HORIZONTAL	2 X 6 X TW*-1 1/2	2	SEE 1	-	-
1	VERTICAL	2 X 6 X 23 1/2	2	2	4/JOINT	10d

LIST OF MATERIALS & NAILING DATA

TYPICAL LTL (VAN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STACKING AND STRAPPING FOR TRUCKLOADING ONLY

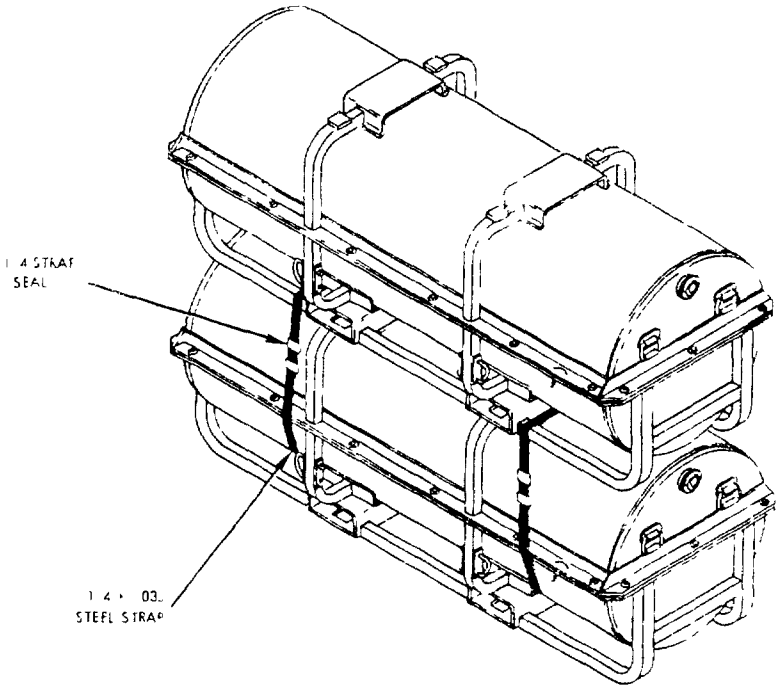

TO ASSURE THAT THE CONTAINER STACKING FEATURES REMAIN ENGAGED THE CONTAINERS SHALL BE STACKED AND STRAPPED TOGETHER IN ACCORDANCE WITH THE FOLLOWING PROCEDURE

1. POSITION TOP CONTAINER ON BOTTOM CONTAINER MAKING CERTAIN THAT THE STACKING FEATURES ARE PROPERLY ENGAGED
2. POSITION TWO 1 1 4 X .035 X 12 1 2 FT STRAPS UNDER THE BODY OF THE BOTTOM CONTAINER AND OVER THE LIDS OF THE TOP CONTAINER AS SHOWN
3. TENSION AND SEAL WITH TWO DOUBLE CRIMPED 1 1 4 SEALS

WARNING

STRAPPING SHALL BE REMOVED FROM CONTAINERS AFTER UNLOADING THE TRAILE

REVIEW ACTIVITIES
NAVY - AS OS

PREPARING ACTIVITY
NAVY-OS

GOVERNMENT PRINTING OFFICE 1978 — 703 122/6_1
PROJECT NO 8 40 - 0187

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER
MIL-STD-1320-185 (NAVY)

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 PREVIOUS EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.M.

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer (Code 803)
Naval Weapons Station EArle
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.