MILITARY STANDARD

MIL-STD-1320-195 (NAVY)


1 MAY 1978

TRUCKLOADING

SIMULATOR ACTUATION UNDERWATER MINE MK 61 & MODS IN PLANTING RACK MK 62 MOD 0 IN CONTAINER MK 628 MOD 0

CONTAINER DATA

DIMENSIONS ..... 38 3/4 L X 38 3/4 W X 78 3/4 H
CUBE ..... 68.4 CU. FT.
GROSS WT. (APPROX.) ..... 750 LBS.
CONTAINER DWG. ..... DL 5165940
DOT HAZARD CLASSIFICATION .... EXPLOSIVES C

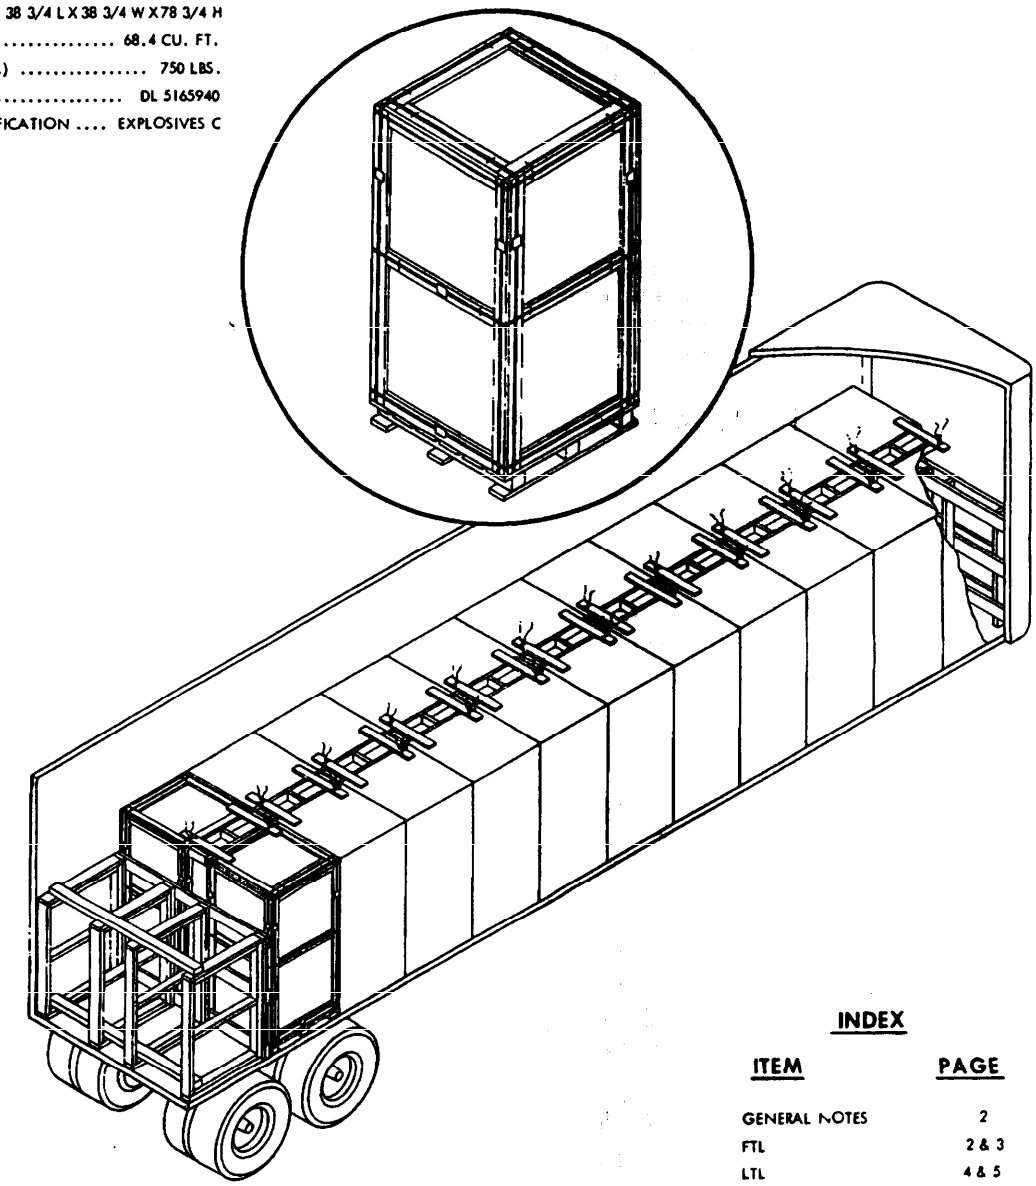

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL	2 & 3
LTL	4 & 5

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS. REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE SEA SYSCOM, BY DIRECTION DATE

ORIGINATOR DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE SIMULATOR, ACTUATION, UNDERWATER MINE MK 61 AND MODS IN CONTAINER MK 628 MOD 0.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FT. TRAILERS (VAN). A FULL TRUCKLOAD (FTL) MAY BE SHIPPED IN VANS WITH BOTH NAILABLE AND NONNAILABLE FLOOR. A LESS THAN TRUCKLOAD (LTL) MUST BE SHIPPED IN A VAN WITH NAILABLE FLOORS.
3. THE SWAY BRACE ASSEMBLY, DETAIL F PAGE 4, SHALL BE USED TO PREVENT LATERAL MOTION BETWEEN ROWS OF CONTAINERS. THE ASSEMBLY SHALL BE OF SUFFICIENT WIDTH TO FILL THE SPACE BETWEEN CONTAINERS. ONE INCH SLACK IS PERMITTED. TWIST TIE ASSEMBLY TO CONTAINER'S STEEL BANDING USING 16 GAUGE SOFT ANNEALED IRON WIRE (2 PLACES) AS SHOWN ON PAGES 3 OR 5.
4. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
5. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA, CLOSE AND SEAL TRAILER DOORS AND ATTACH "FLAMMABLE" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
6. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER, MM-L-751; NAILS FF-N-105, UNLESS OTHERWISE SPECIFIED TYPE II, STYLE 10 COMMON BRIGHT STEEL AND TYPE II, STYLE 10 COMMON CEMENT COATED WHEN SPECIFIED.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40,42,44 & 45 FT TRAILERS (VAN)

1. A FTL CONSISTS OF


40 FT. TRAILER	-	22 SIMULATORS
42 FT. TRAILER	-	24 SIMULATORS
44 & 45 FT. TRAILER	-	26 SIMULATORS

2. LENGTH OF STRUT, PIECE 11 OF DETAIL C, SHALL BE SUCH AS TO CAUSE THE GATE FRAMES, DETAIL C, TO BEAR AGAINST THE REAR GATE, DETAIL B, AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

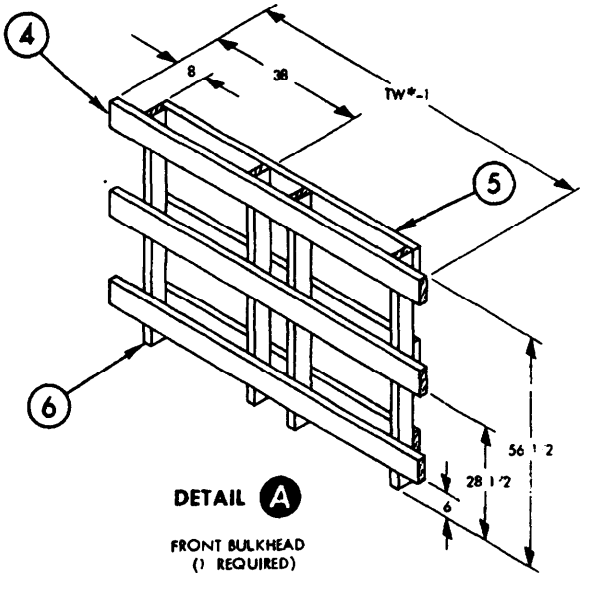

DETAIL A

FRONT BULKHEAD
(1 REQUIRED)

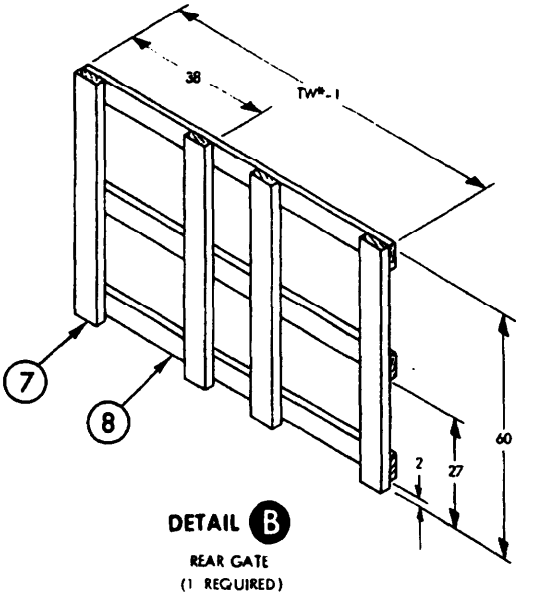


DETAIL B

REAR GATE
(1 REQUIRED)


*TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:46Z
Check the source to verify that this is the currentversion before use.

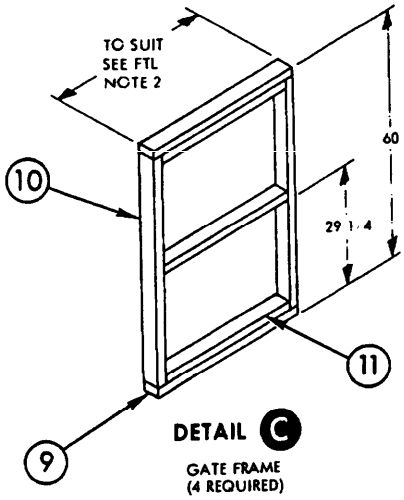


DETAIL C

GATE FRAME
(4 REQUIRED)

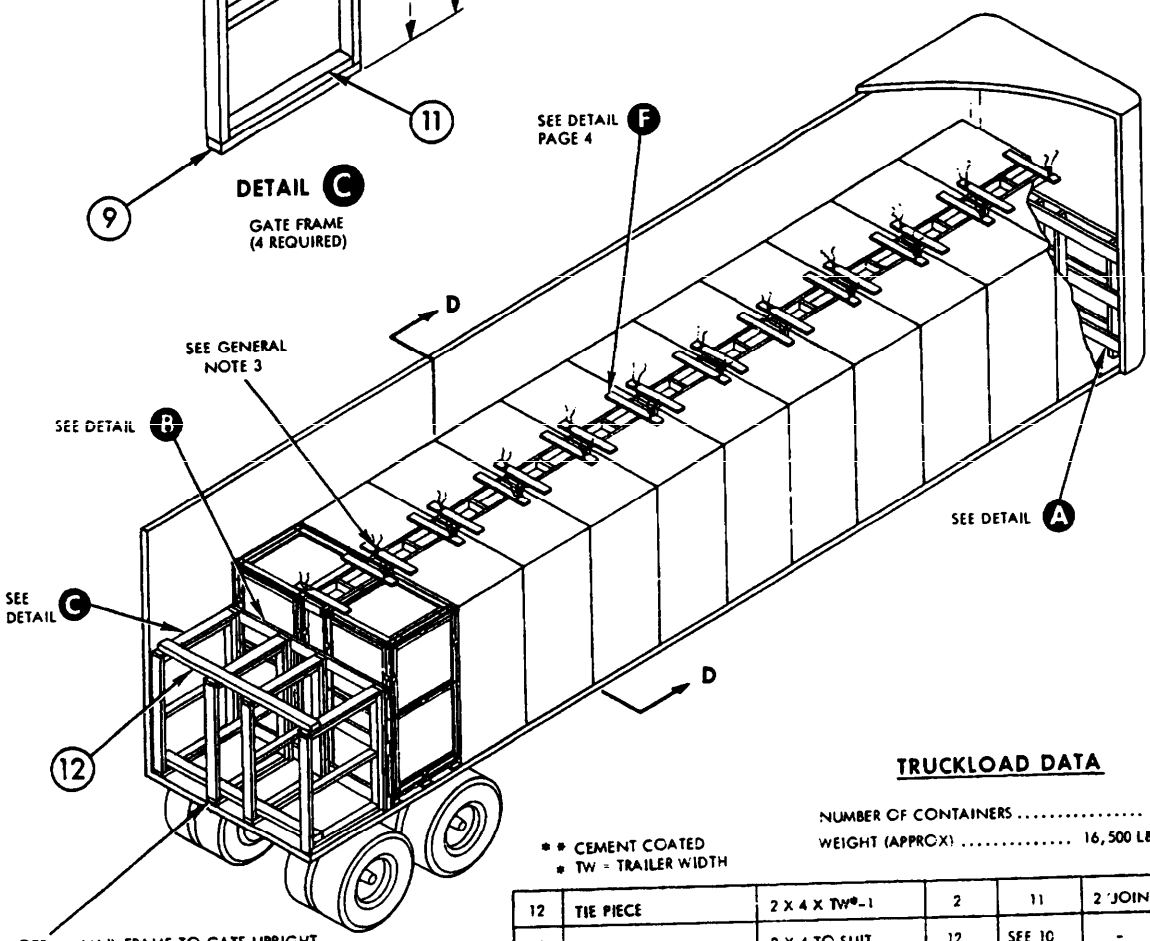

NOTE: NAIL FRAME TO GATE UPRIGHT (PIECE 7 OF DETAIL B) W/8-10d NAIL PER FRAME.

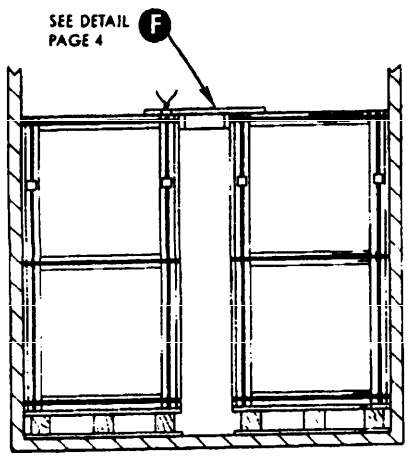

SECTION D-D


TRUCKLOAD DATA

NUMBER OF CONTAINERS 22
WEIGHT (APPROX) ..... 16,500 LBS.


** CEMENT COATED
* TW = TRAILER WIDTH

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
		LIST OF MATERIALS & NAILING DATA				
12	TIE PIECE	2 X 4 X TW*-1	2	11	2 JOINT	16d
11	STRUT	2 X 4 TO SUIT	12	SEE 10	-	-
10	UPRIGHT	2 X 4 X 60	8	11	2 JOINT	16d
9	LONGITUDINAL	2 X 4 TO SUIT	8	10	2 JOINT	16d
8	CROSSMEMBER	2 X 6 X TW*-1	4	SEE 7	-	-
7	VERTICAL	2 X 6 X 60	4	8	3 JOINT	10d
6	VERTICAL	2 X 4 X 56 1/2	4	SEE 4 & 5	-	-
5	FWD CROSSMEMBER	2 X 6 TO SUIT	3	6	3 JOINT	10d
4	AFT CROSSMEMBER	2 X 6 X TW*-1	3	6	3 JOINT	10d
3	SUPPORT	1 X 4 X 30	22	1	3 JOINT	10d**
2	STRUT	2 X 4 TO SUIT	33	SEE 1	-	-
1	LONGITUDINAL	2 X 4 X 38 1/2	22	2	2 JOINT	16d

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

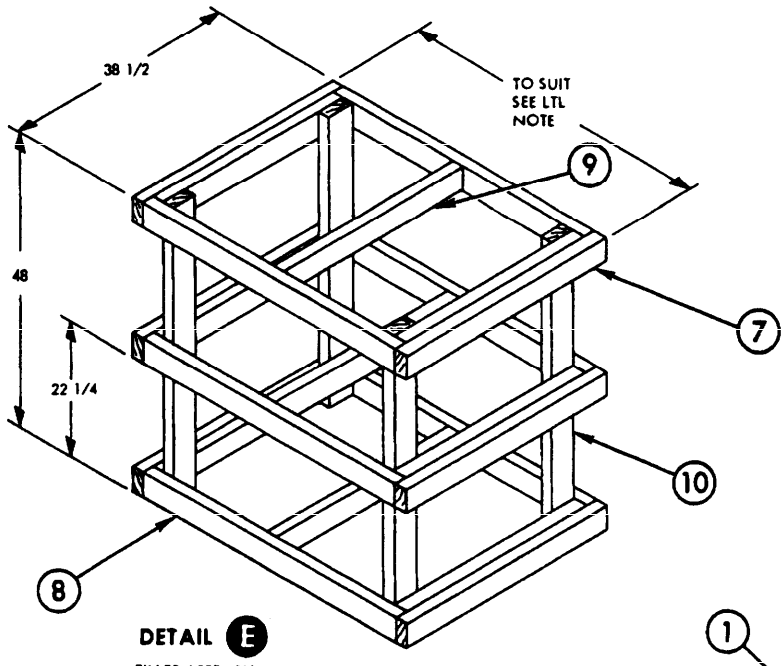

DETAIL E
FILLER ASSEMBLY

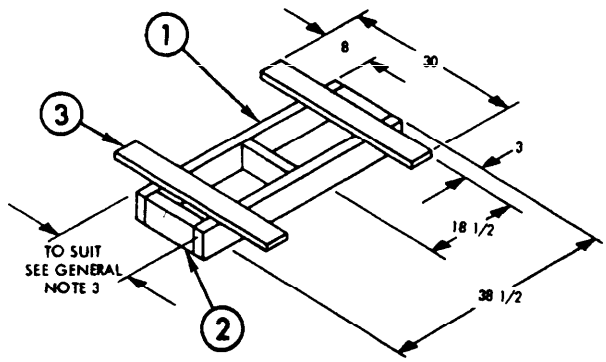


DETAIL F
SWAY BRACE ASSEMBLY

LTL ALL LENGTH TRAILERS (VAN)


1. WHEN REQUIRED TO SHIP LTL, DECREASE THE NUMBER OF CONTAINERS STARTING AT THE REAR OF THE TRAILER KEEPING THE DOUBLE ROW PATTERN EVEN IF POSSIBLE.
2. WHEN SHIPPING AN ODD NUMBER OF CONTAINERS AND THE DOUBLE ROW PATTERN IS UNEVEN, USE THE FILLER ASSEMBLY, DETAIL E, TO EVEN THE ROWS. SEE PAGE 5. THE FILLER ASSEMBLY SHALL FILL THE LATERAL VOID.
3. THE LTL ON PAGE 5 SHOWS A LOAD OF AN ODD NUMBER OF CONTAINERS WITH A FILLER ASSEMBLY USED TO EVEN THE ROW.
4. BLOCK AND BRACE LTL'S USING THE PRINCIPLES SHOWN FOR THE LTL SHOWN ON PAGE 5.
5. WHEN SHIPPING ONE LESS CONTAINER THAN A FTL USE THE FILLER ASSEMBLY, DETAIL E. BLOCK AND BRACE THE LOAD USING THE PRINCIPLES SHOWN ON PAGE 3.


Source: https://assist.dla.mil -- Downloaded: 20260-23T23:46Z
Check the source to verify that this is the current version before use.

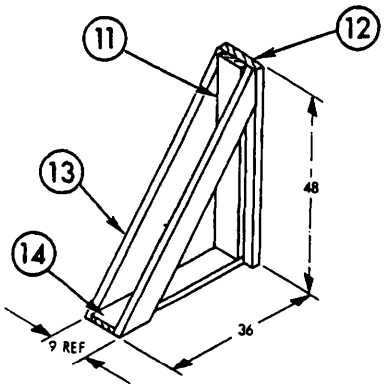

DETAIL G

KNEE BRACE
(8 REQUIRED)

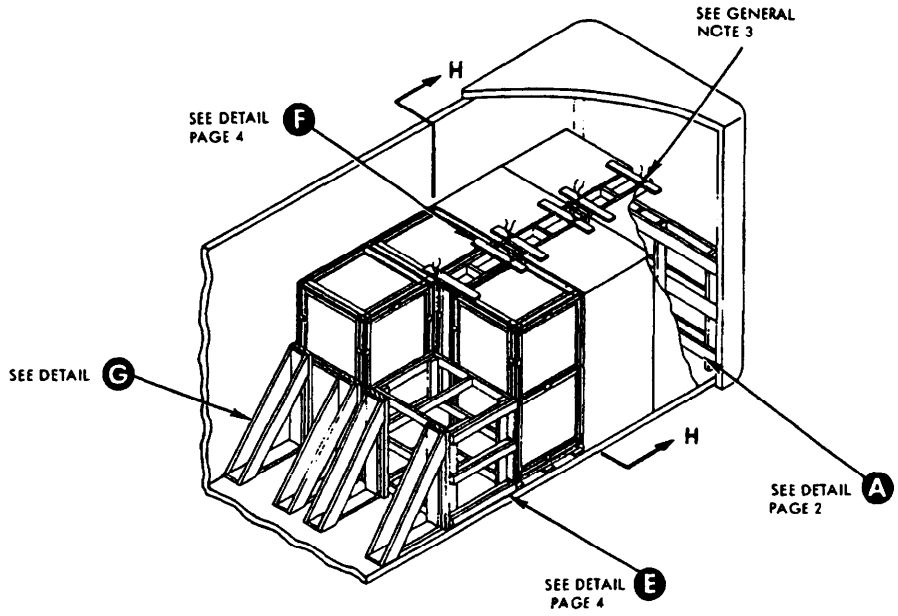

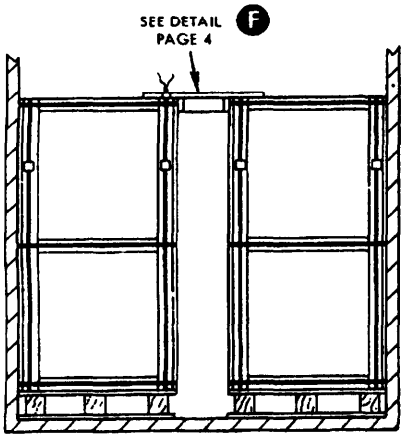

SECTION H-H

* * CEMENT COATED
* TW - TRAILER WIDTH

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS: NUMBER	NAILS: SIZE
14	BRACE, CLEAT	2 X 6 X 34 1/2	8	TRAILER FLOOR	6	16d
13	BRACE, DIAGONAL	2 X 6 TO SUIT	16	11 & 14	4/JOINT	16d
12	BRACE, BACKUP	2 X 10 X 48	8	14	3	16d
11	BRACE, UPRIGHT	2 X 6 X 46 1/2	8	12	6	10d
10	UPRIGHT	2 X 4 X 48	4	9	2/JOINT	16d
9	STRUT	2 X 4 X 35 1/2	9	SEE 8	-	-
8	HORIZONTAL	2 X 4 TO SUIT	6	9	2/JOINT	16d
7	LONGITUDINAL	2 X 4 X 38 1/2	6	8	2/JOINT	16d
6	VERTICAL	2 X 4 X 56 1/2	4	SEE 4 & 5	-	-
5	FWD CROSSMEMBER	2 X 6 TO SUIT	3	6	3/JOINT	10d
4	AFT CROSSMEMBER	2 X 6 X TW*-1	3	6	3/JOINT	10d
3	SUPPORT	2 X 4 X 30	6	2	3/JOINT	10d**
2	STRUT	2 X 4 TO SUIT	9	SEE 1	-	-
1	LONGITUDINAL	2 X 4 X 38 1/2	6	2	2/JOINT	10d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-195 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:46Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
NWHC-803
Colts Neck, N.J. 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.