MIL-B-45389A(AT)
16 November 1979
SUPERSEDING
MIL-B-45389(ORD)
29 November 1961

MILITARY SPECIFICATION

BULLDOZER, EARTH MOVING: TANK MOUNTED, M9; PREPARATION FOR STORAGE AND SHIPMENT OF

This specification is approved for use by US Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the preparation for storage and shipment of an earth moving, tank mounted M9 bulldozer; including preservation, packaging, packing and marking.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
T-R-571	- Rope, Cotton.
NN-P-530	- Plywood, Flat Panel.
QQ-S-637	- Steel, Bar, Carbon, Cold Finish (Standard Quality).
QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
QQ-S-741	- Steel, Carbon, Structural, Plate and Bar.
QQ-W-461	- Wire, Steel Carbon (Round, Bare and Coated).
SS-R-501	- Roofing Felt Asphalt, Prepared, Smooth-Surfaced.
MMM-A-260	- Adhesive, Water Resistant (For Sealing Waterproof Paper).
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.
PPP-T-45	- Tape, Gummed Paper, Reinforced and Plain, for Sealing and Securing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Materiel Readiness Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

PPP-T-60 - Tape, Packaging, Waterproof.
PPP-T-76 - Tape, Packaging, Paper (For Carton Sealing).

MILITARY

MIL-C-104 - Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116 - Preservation - Packaging, Methods of.
MIL-B-117 - Bag, Sleeve and Tubing - Interior Packaging.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-C-5501 - Cap and Plug, Protective, Dust and Moisture Seal.
MIL-C-11796 - Corrosion Preventive Compound, Petrolatum, Hot Application.
MIL-G-12803 - Gasket Material, Non-metallic.
MIL-C-16173 - Corrosion Preventive, Compound Solvent Cutback, Cold-application.
MIL-P-17667 - Paper, Wrapping, Chemically Neutral (Non-corrosive).
MIL-L-21260 - Lubricating Oil, Internal-combustion Engine, Preservative and Break-in.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1183 - Welding, Gas, Steels, Constructional, Readily Weldable, for Low Stressed Joints.
MS15795 - Washer, Flat metal, Round, General Purpose.
MS21309 - Staple, Ground Wire.
MS27040 - Nut, Plain, Square-Steel, Cadmium Plated.
MS35338 - Washer, Lock-spring, Helical, Regular (Medium) Series.
MS35751 - Bolt, Square Neck, Round Head (Carriage) Steel, Cadmium or Zinc Plated, UNC-2A.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING MATERIALS (ASTM)

A519 - Seamless Carbon and Alloy Steel Mechanical Tubing.

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 First article (preproduction pilot pack). Unless otherwise specified by the procuring activity (see 6.1), a preproduction pilot pack shall be submitted for approval to determine conformance to this specification. After approval of the preproduction pilot pack, no change shall be made in crate construction without the specific approval of the procuring activity (see 6.2 and 6.3).

3.2 Cleaning and drying. Bulldozer, including sub-assemblies, and component parts shall be cleaned in accordance with process C-1 of MIL-P-116, and dried by any applicable procedure specified therein. Cleaning and drying shall be accomplished without damage to bulldozer.

3.3 Preservation and packaging. Preservation and packaging shall be level A or B as specified (see 6.1).

3.3.1 Level A.

3.3.1.1 Interior surfaces. Interior surfaces of hydraulic cylinders and ram assemblies, reservoir, right angle drive, directional control valve, hydraulic pump, hoses, tubes, armor hydraulic tubes, safety unloader valve assembly and manifold shall be flushed with preservative oil conforming to grade 2 of MIL-L-21260. All openings of internally preserved items, except openings of items packaged method IIA (see figures 27 and 52) and method IA-14 (see figures 22J, 48 and 55) of MIL-P-116, shall be sealed prior to exterior preservation. Threaded openings shall be sealed with metal or plastic threaded plugs. Other openings shall be sealed with plastic caps conforming to MIL-C-5501 or with tape conforming to type I, class 1 of PPP-T-60. To minimize sealing operations, parts and assemblies shall be preserved and packaged as nearly as practicable in completely assembled condition.

3.3.1.2 Exterior surfaces. Except as otherwise specified herein, unpainted exterior metal surfaces of the bulldozer component sub-assemblies and parts, including reservoir, moldboard assembly and linkage, guards, hose and tube assemblies, and all items mentioned in 3.3.1.1, except items packaged method IIA and IA-14, shall be coated with preservative conforming to grade 1 of MIL-C-16173. All metallic crate parts, except nails, straps, and anchor plates shall be coated with grade 1 preservative. Exterior unpainted surfaces of right angle drive, oil pump, and mounting plates shall be coated with preservative conforming to grade 2 of MIL-C-16173. Exterior unpainted surfaces of directional control valve and safety unloader valve assembly shall be coated with

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

preservative oil conforming to type 2 of MIL-L-21260. Application of preservation to clutch assembly, fabric, rubber, or rubber impregnated surfaces shall be avoided. Parts inaccessible after assembly, such as positioning pins and bolts, shall be preserved before assembly.

3.3.1.3 Packaging method. Except as otherwise specified herein, packaging of preserved parts shall meet the requirements for method I of MIL-P-116.

3.3.1.4 Right angle drive, clutch, oil pump and mounting bracket assembly. Right angle drive, clutch, oil pump and mounting bracket assembly shall be packaged as a unit method of IIA of MIL-P-116 (see figures 22B, item F, and figures 27 and 52).

3.3.1.5 Miscellaneous bulldozer parts.

3.3.1.5.1 Items packaged in box 1 (see figures 22E through 22H). Miscellaneous bulldozer parts including small fittings such as connectors and elbows shall be assembled to hoses and tubes, where practical. When assembled, the foregoing items shall be processed in accordance with 3.3.1.1. Unpainted metal surfaces of all small fittings such as connectors and elbows not assembled to tubes, hoses, or other assemblies; power take-off parts, and directional control valve controls and linkage shall be coated with preservative conforming to class 2 of MIL-C-11796 and wrapped in barrier material conforming to type II, grade A, class 2 of MIL-B-121. Unpainted metal surfaces of all other parts shall be coated with preservative conforming to grade 4 of MIL-C-16173.

3.3.1.5.2 Items packaged in box 2 (see figures 22I and 22J). Unpainted metal surfaces shall be coated with preservative conforming to grade 2 of MIL-C-16173, wrapped in barrier material conforming to type II, grade A, class 2 of MIL-B-121 and packaged method IA-14 of MIL-P-116. Non-metal parts shall be wrapped in paper conforming to type II of MIL-P-17667 then included in the method IA-14 package.

3.3.1.5.3 Items packaged in box 3 (see figure 22J and 22K).

3.3.1.5.3.1 Headlamp and brush guard attachments. Unpainted metal surfaces of headlamp and brush guard attaching parts shall be coated with preservative conforming to grade 2 of MIL-C-16173, wrapped in barrier material conforming to type II, grade A, class 2 of MIL-B-121, and packaged method IA-14 of MIL-P-116.

3.3.1.5.3.2 O-rings, gaskets, seals, and technical literature. O-rings, gaskets, seals, and technical literature shall be included in the same method IA-14 package as specified in 3.3.1.5.3.1.

3.3.1.5.4 Items packaged in box 4 (see figure 22K).

3.3.1.5.4.1 Lever control assembly. Unpainted metal surfaces of the lever control assembly shall be coated with preservative conforming to class 2 of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

MIL-C-11796, then wrapped in barrier material conforming to type II, grade A, class 2 of MIL-B-121, and packaged method I of MIL-P-116.

3.3.1.5.5 Items packaged in box 5 (see figure 22K).

3.3.1.5.5.1 Headlamp adapter assembly. Headlamp adapter assembly shall be wrapped in paper conforming to type II or MIL-P-17667 and packaged method IA-14 of MIL-P-116.

3.3.2 Level B. Bulldozer parts and assemblies, including technical literature, shall be preserved and packaged in accordance with 3.3.1, with the following exceptions:

3.3.2.1 Right angle drive, clutch, oil pump and mounting bracket assembly. Right angle drive, clutch, oil pump and mounting bracket assembly shall be preserved in accordance with 3.3.1.1 and 3.3.1.2.

3.3.2.2 Miscellaneous bulldozer parts

3.3.2.2.1 Items packaged in box 1 (see figures 22E through 22H). Items shall be preserved and packaged in accordance with 3.3.1.5.1, except that unpainted metal surfaces of all small fittings such as connectors and elbows not assembled to tubes, hose or other assemblies; and clutch control linkage shall be coated with preservative conforming to grade 2 of MIL-C-16173.

3.3.2.2.2 Items packaged in box 2 (see figures 22I through 22J). Items shall be preserved and packaged in accordance with 3.3.1.5.2, except that only the outside box of the method IA-14 (see figure 21B, item 35A) shall be used.

3.3.2.2.3 Items packaged in box 3 (see figures 22J through 22K). Items shall be preserved and packaged in accordance with 3.3.1.5.3, except that only the outside box of method IA-14 (see figure 21C, item 57B) shall be used.

3.3.2.2.4 Items packaged in box 4 (see figure 22K). Items shall be packaged in accordance with 3.3.1.5.4, except that unpainted metal surfaces of the lever control assembly shall be coated with preservative conforming to grade 2 of MIL-C-16173.

3.3.2.2.5 Items packaged in box 5 (see figure 22K). Items shall be wrapped in accordance with 3.3.1.5.5 and packaged method I of MIL-P-116, using only the outside box of the method IA-14 (see figure 21D, item 62B).

3.4 Packing. Packing shall be level A or B as specified (see 6.1).

3.4.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

3.4.1.1 Crate construction. Bulldozer crate shall be constructed in accordance with figures 1 and 2 through 21E, and as specified herein. Wood used in construction of crate shall conform to group II of MIL-C-104. Grades of lumber and moisture content shall be as specified in tables I and II. Nails and nailing shall be in accordance with MIL-C-104. Bulldozer parts and sub-assemblies (see figures 22 through 50) shall be packed in accordance with figures 51 through 56, as applicable.

TABLE I. Container lumber - nailed wood crates - framing, sheathing.

Seasoning: Maximum 19 percent moisture content. If storage facilities at the installation afford opportunity for seasoning, unseasoned lumber may be requisitioned.

Sizes: As required for framing in accordance with MIL-C-104.

Species	Framing 2/		Lowest suitable grade 1/	
	1-inch	2-inch	Sheathing boards	Association grading rules
Softwoods:				
Cedar:				
Western red	No. 2	No. 2	No. 3	WCBLGI
Western red	No. 3	No. 2 dimension	No. 4	WPA
Cypress	No. 2	No. 2	No. 3	SCMA, NHLA
Douglas-fir:				
Coast type	No. 2	No. 2	No. 3	WCBLGI
Mountain type	No. 3	No. 2 dimension	No. 4	WPA
Fir, white	No. 3	No. 2 dimension	No. 4	WPA
Hemlock:				
Eastern	No. 2	No. 2	No. 3	NHHMA
West coast	No. 2	No. 2	No. 3	WCBLGI
Larch, western	No. 3	No. 2 dimension	No. 4	WPA
Pine:				
Idaho white	No. 3		No. 4	WPA
Lodgepole	No. 3	No. 2 dimension	No. 4	WPA
Northern white	No. 3	No. 2 dimension	No. 4	NPMA, NELMA, NHHMA
Norway (red)	No. 2	No. 2	No. 4	NPMA, NELMA
Ponderosa	No. 3	No. 2 dimension	No. 4	WPA

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

TABLE I. Container lumber - nailed wood crates - framing, sheathing. - Continued

Species	Lowest suitable grade 1/			
	Framing 2/		Sheathing boards	Association grading rules
	1-inch	2-inch		
Southern yellow	No. 2 box	No. 2	No. 3	SPIB
Sugar	No. 3	No. 2 dimension	No. 4	WPA
Redwood	Sap common	Sap common	No. 3	CRA
Spruce:	No. 3	No. 2 dimension	No. 4	WPA
Englemann	No. 3	No. 2 dimension	No. 4	WPA
Eastern	No. 2	No. 2	No. 2	NELMA
Sitka	No. 2	No. 2	No. 2	WCBLGI
Hardwoods	No. 2 construction boards	No. 2 dimension	No. 2 construction boards	

1/ The grades listed do not necessarily reflect comparability of grades or parity of species and are not so recognized in the industry. The grades shown are minimum standards, and requisitioning agencies should exercise judgement in specifying the above or higher grades appropriate to the end use.

2/ Actual thickness to be according to thicknesses for species groupings as specified in MIL-C-104.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

TABLE II. Container lumber - crates - skids and base headers.

Seasoning: Maximum 19 percent moisture content for nominal 2-inch stock. For thicker, no requirements.

Requirements: Skids are key structural parts of crates and are generally made of 2-inch or thicker dimension lumber. They should be free from knots that extend over more than one-fourth the width of the skid face and of cross grain of a slope steeper than 1 in 10. This makes it necessary to select skid and base header lumber piece by piece from stocks of yard dimension.

Species	Lowest suitable grade 1/	Association grading rules
Softwoods:		
Douglas-fir:		
Coast type	No. 1	WCBLGI
Mountain type	No. 1 dimension	WPA
Hemlock west coast	No. 1	WCBLGI
Larch, western	No. 1 dimension	WPA
Pine:		
Norway (red)	No. 1 dimension	NPMA, NELMA
Southern yellow	No. 1	SPIB
Hardwoods	No. 1 dimension	NHLA

1/ The grades listed do not necessarily reflect comparability of grades or parity of species and are not so recognized in the industry. The grades shown are minimum standards, and requisitioning agencies should exercise judgement in specifying the above or higher grades appropriate to the end use.

3.4.1.2 Packing procedure. Bulldozer kit shall be secured in the crate in a manner that will assure protection from physical damage. Prior to packing on the crate base, sub-assemblies and parts shall be assembled in accordance with figures 23 through 50. All sub-assemblies and parts shall be cushioned, blocked, braced and anchored to prevent movement. When tested as specified in 4.4.2, there shall be no damage to any part and no evidence of movement within the crate. Except for items secured to the crate floor or placed in built-in, long, wood box under the moldboard assembly, lighter items shall be positioned above heavier items. Items weighing over 20 pounds and secured by wire (see figure 21C, item 59) shall be double wired. Anchor plates for strapping shall be secured with screw type nails. Nuts, bolts, and strapping used in crate construction, and in securing, blocking and packing shall be tightened. Related small parts shall be kept together. Threads and critical surfaces of unwrapped items shall be cushioned as necessary for protection. Unboxed items shall include, but not be limited to, figures 22A through 22D, items A through Z. Items packed in boxes shall be immobilized. Care shall be exercised to avoid rupture to hoses when nailing top to box. Items shall be packed in boxes constructed in accordance with table III. The items to be placed in each of the boxes shall be in accordance with table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

TABLE III. Boxed items.

Box construction			Boxed items	
Box No.	Figure	Items	Figures	Items
1	21B	26 through 31	22E through 22H	Y through AL
2	21B	34, 35, 35A and 35B	22I and 22J	(miscellaneous)
3	21C	57, 57A and 57B	22J and 22K	AM through AN-1 & MISC.
4	21C	58	22K	AO
5	21D	62, 62A and 62B	22K	(miscellaneous)

3.4.2 Level B. Packing shall be in accordance with 3.4.1.

3.5 Marking. In addition to any special marking required by the contract or order, exterior containers shall be marked in accordance with MIL-STD-129 (see 6.1).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Contractor's quality assurance system. The contractor shall provide and maintain an effective Quality Assurance System, acceptable to the Government, covering the supplies under the contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The contractor will not be restricted to the inspection listed, provided that an equivalent control is included in the approved quality assurance procedure. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that might affect the degree of assurance required by this specification or other applicable documents referenced herein.

4.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine that practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from prescribed or agreed-upon procedures, or instances of poor practices which might have an adverse effect upon the quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

correct deficiencies shall be cause for suspension of acceptance until corrective action has been made, or until conformance of product to prescribed criteria has been demonstrated.

4.4 Inspection provisions.

4.4.1 Lot size. An inspection lot shall consist of all bulldozer kits of one type from an identifiable production period, submitted at one time for acceptance inspection.

4.4.2 Sampling inspection.

4.4.2.1 Visual, dimensional and primary functional inspection. Sampling for visual, dimensional and primary functional inspection shall be made in accordance with MIL-STD-105. The classification of defects and acceptable quality levels (AQL's) shall be in accordance with table IV.

TABLE IV. Classification of defects.

Categories	Defects	Method of inspection
Major:	(1.0 percent defective)	
101	Improper skidding (inadequate)	Visual
102	Improper boxes	Visual
103	Improper inner packing	Visual
104	Steel strapping (inadequate)	Visual
Minor:	(4.0 percent defective)	
201	Loose strapping	Visual
202	Sharp edges	Visual
203	Improper nailing	Visual
204	Point coverage incomplete or color not as specified	Visual
205	Identification missing or incorrect	Visual
206	Assembly instructions missing or improperly prepared	Visual
207	Excessive cube	Visual

4.4.2.2 Unclassified characteristics. All unclassified defects having no bearing on function, safety, interchangeability or life, but which are considered departures from good workmanship, will be noted in writing. Workmanship deficiencies falling within this category and recurring in five consecutive lots, or in ten lots or more within a thirty day period, will be added to the minor characteristics with no increase in AQL.

4.4.3 First article (preproduction pilot pack) test. The preproduction pilot pack (see 3.1) and 1 unit from the first 20 units of production shall be subjected to one of the tests listed in 4.5 except that the drop method shall be conducted only when facilities for neither of the other methods are available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

4.4.3.1 Failure. Exterior damage to panels of containers which have received impact shall not be cause for rejection provided there has been no damage to contents, and that interior framing, bracing, and blocking remain intact.

4.5 Test methods and procedures.

4.5.1 Impact tests.

4.5.1.1 Crane method. The pack shall be raised clear of the floor with a crane and moved into position so that one end will just touch a solid, flat vertical barrier while the supporting chain or cable remains vertical. Barrier shall cover no less than 5 percent of the end panel. The pack shall then be pulled away from the barrier along its arc of free swing for a distance which will cause the pack, when released, to swing and strike the barrier at a speed of approximately 6 mph. Moving the pack along the arc until the center of gravity is approximately 18 inches higher than its original position with a distance of 28 feet between point suspension and center of gravity of pack may be expected to accomplish this impact speed under average conditions. The test shall then be repeated with the other end of the pack striking the barrier.

4.5.1.2 Railroad car method. The pack shall be securely blocked, to prevent movement of the car. Anti-skid plates shall not be used for this test. The car shall be humped to cause impact at approximately 10 mph against three empty railway cars which have brakes fully set.

4.5.1.3 Drop method. One face of the container shall be mounted and supported on a wood sill 4 by 6 by 145 inches, placed at right angles to the skids. Wood sill shall be located not more than 12 inches from each end, and under the outer skid's rubbing strips of each side. The opposite end shall then be raised to a height of 12 to 15 inches and allowed to fall freely to a hard surface. This test shall be applied once to each end of the container.

5. PACKAGING

Not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. If preproduction pilot pack is required (see 3.1).
c. Selection of applicable levels of preservation and packaging (see 3.3) and level of packing (see 3.4).
d. Selection of the applicable cover (see 3.4.3.3).
e. Any special marking required (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

6.2 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for examination, tests and approval of the first article (see 3.1).

6.3 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item shall be encouraged (see 3.1).

6.4 Changes from previous issue. Asterisks are not used in this revision, to identify changes with respect to the previous issue, due to the extensiveness of the changes.


Custodian:
Army - AT

Reviewer:
Army - SM

Preparing activity:
Army - AT

Project No. PACK-A214


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

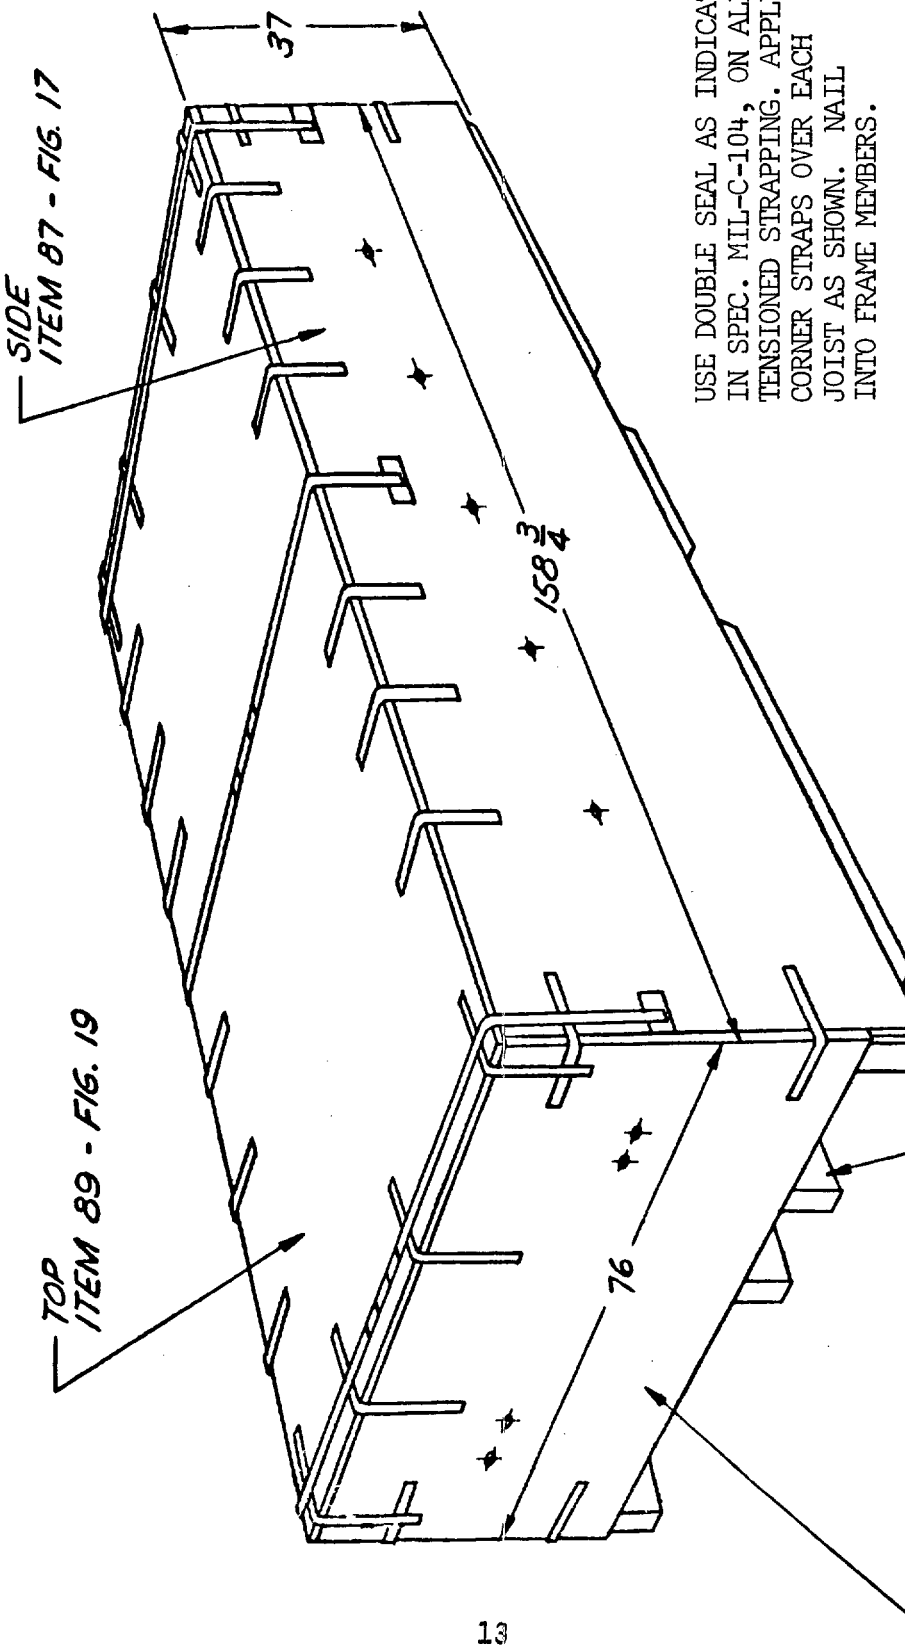

USE DOUBLE SEAL AS INDICATED IN SPEC. MIL-C-104, ON ALL TENSIONED STRAPPING. APPLY CORNER STRAPS OVER EACH JOIST AS SHOWN. NAIL INTO FRAME MEMBERS.

CRATE, M9 BULLDOZER
LEVEL A & B SHIPMENT
ITEM 96
FIG. 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

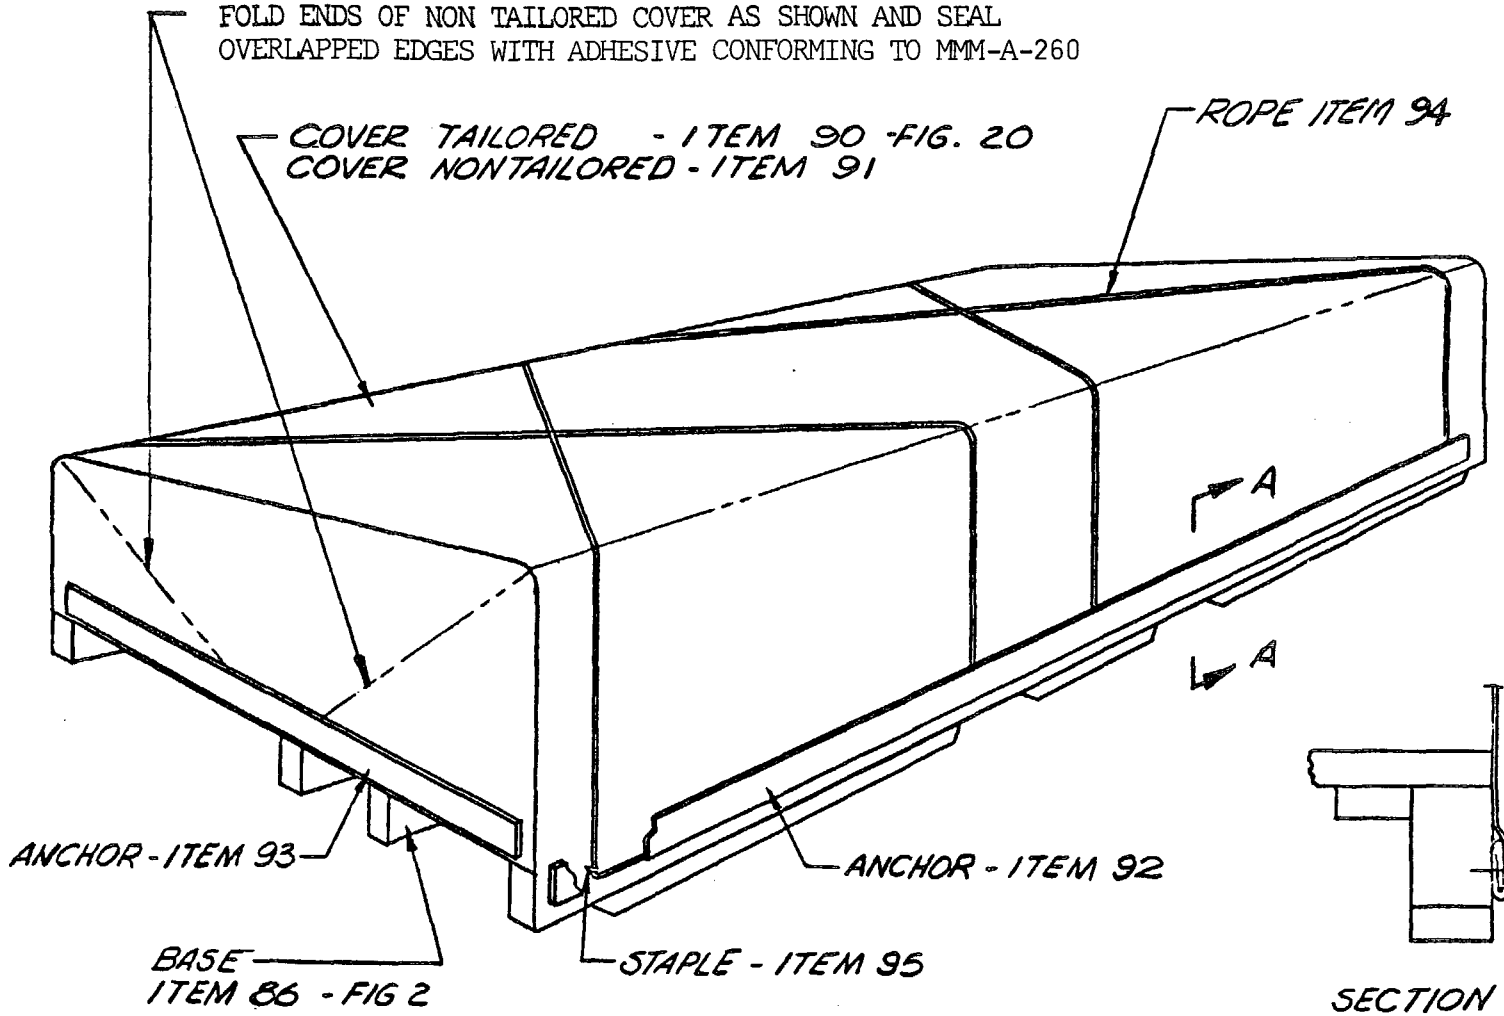

SECTION A-A
TYPICAL OVERLAP 2 INCHES

SKID, M9 BULLDOZER
LEVEL C SHIPMENT
ITEM 97
FIG. 1A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

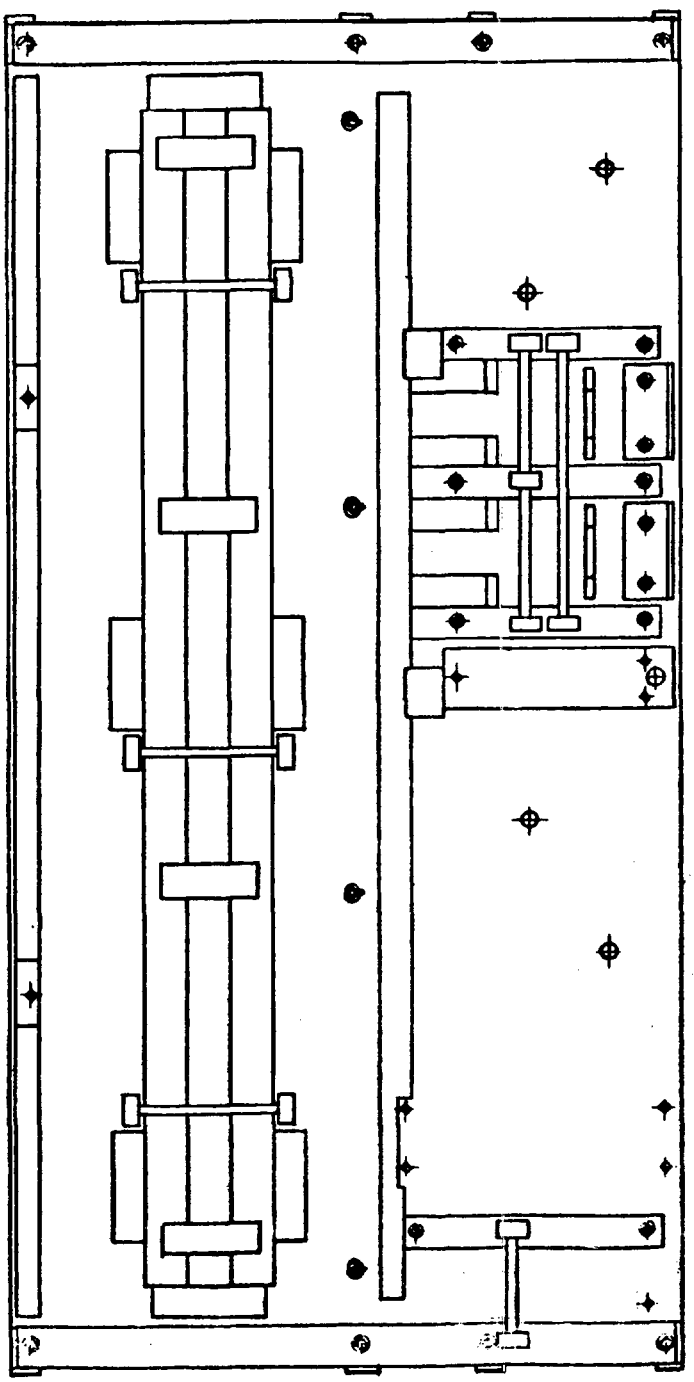

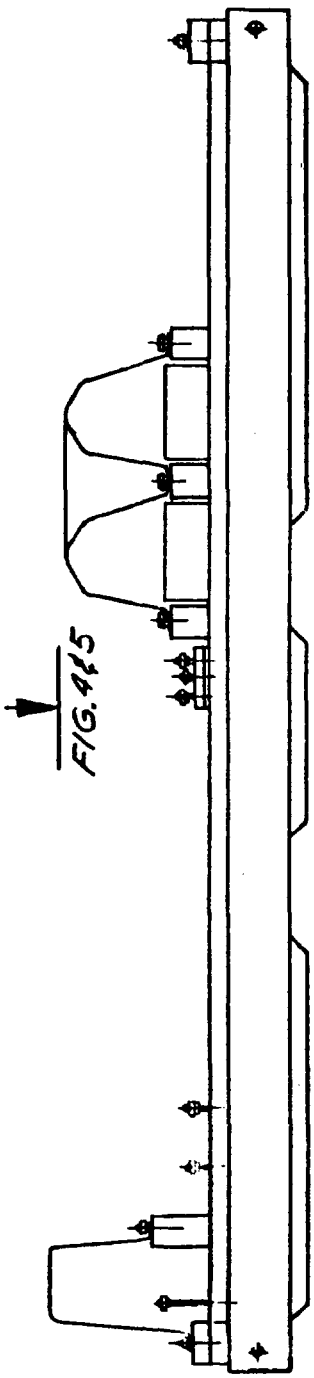


FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

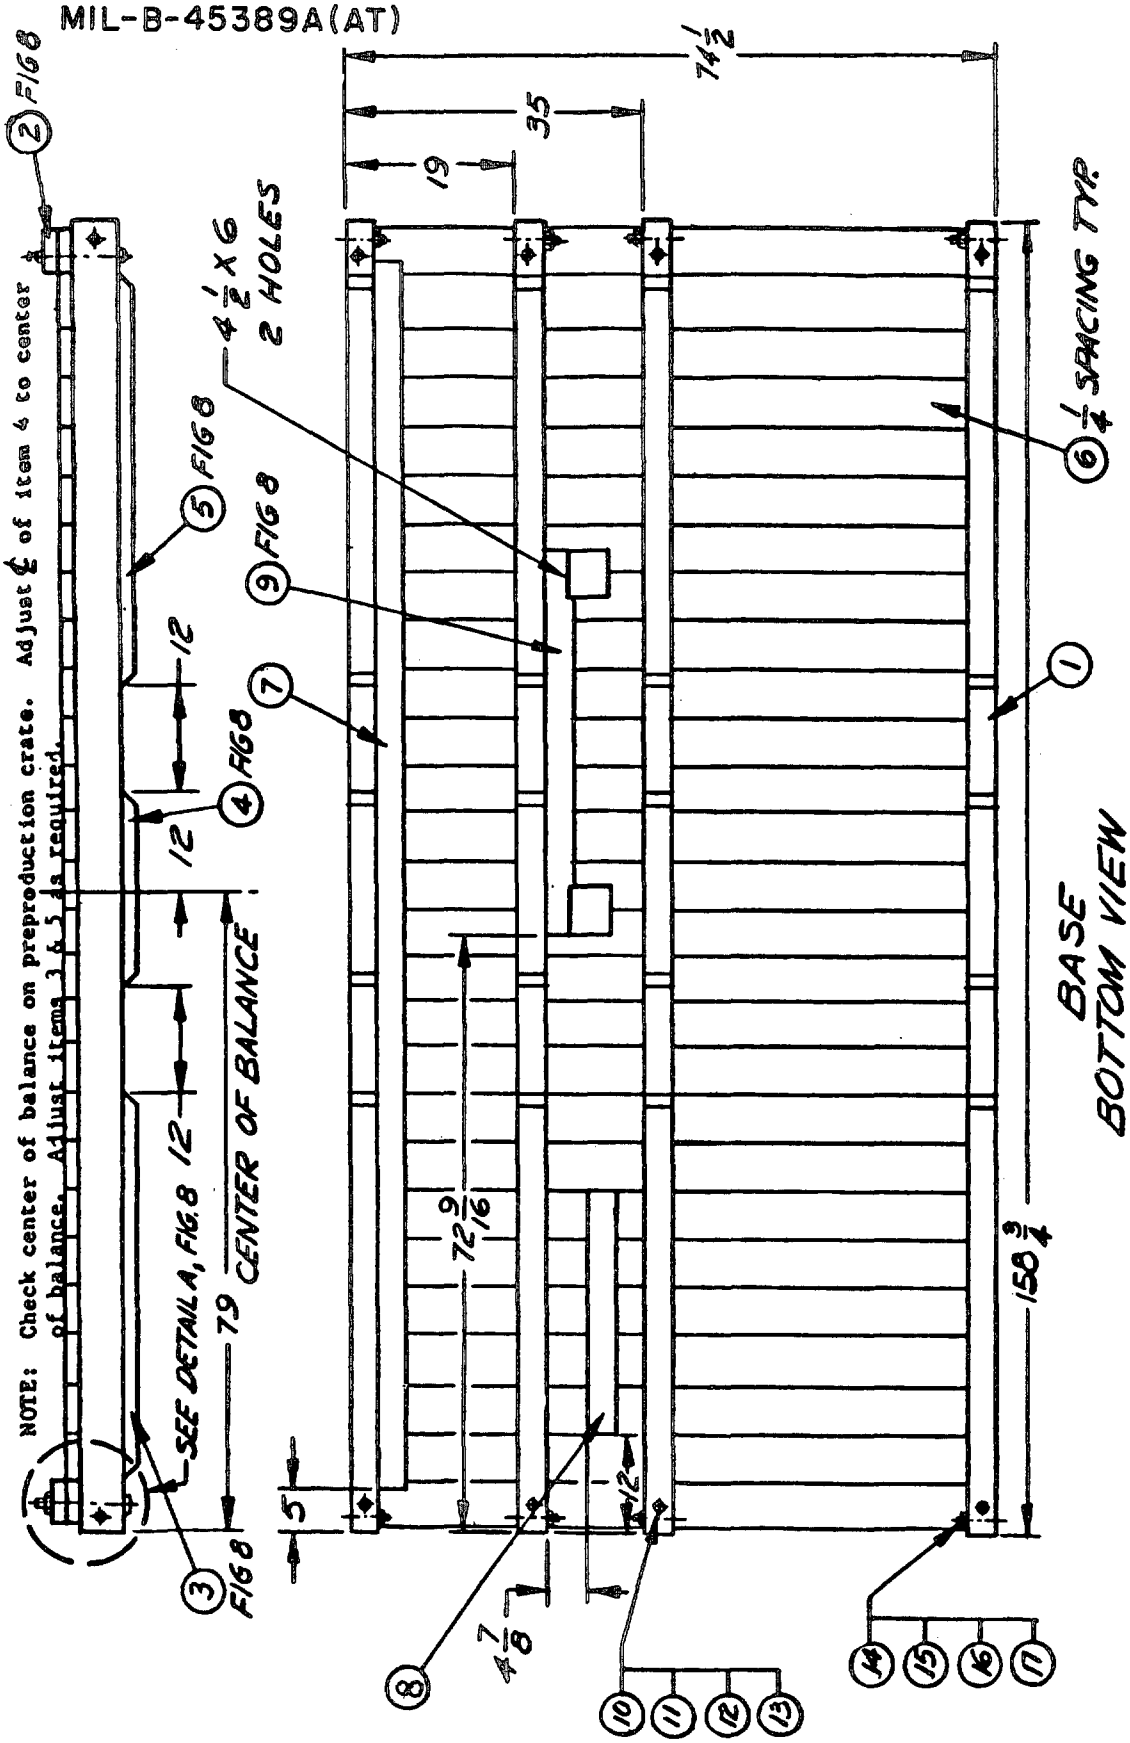


FIG. 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

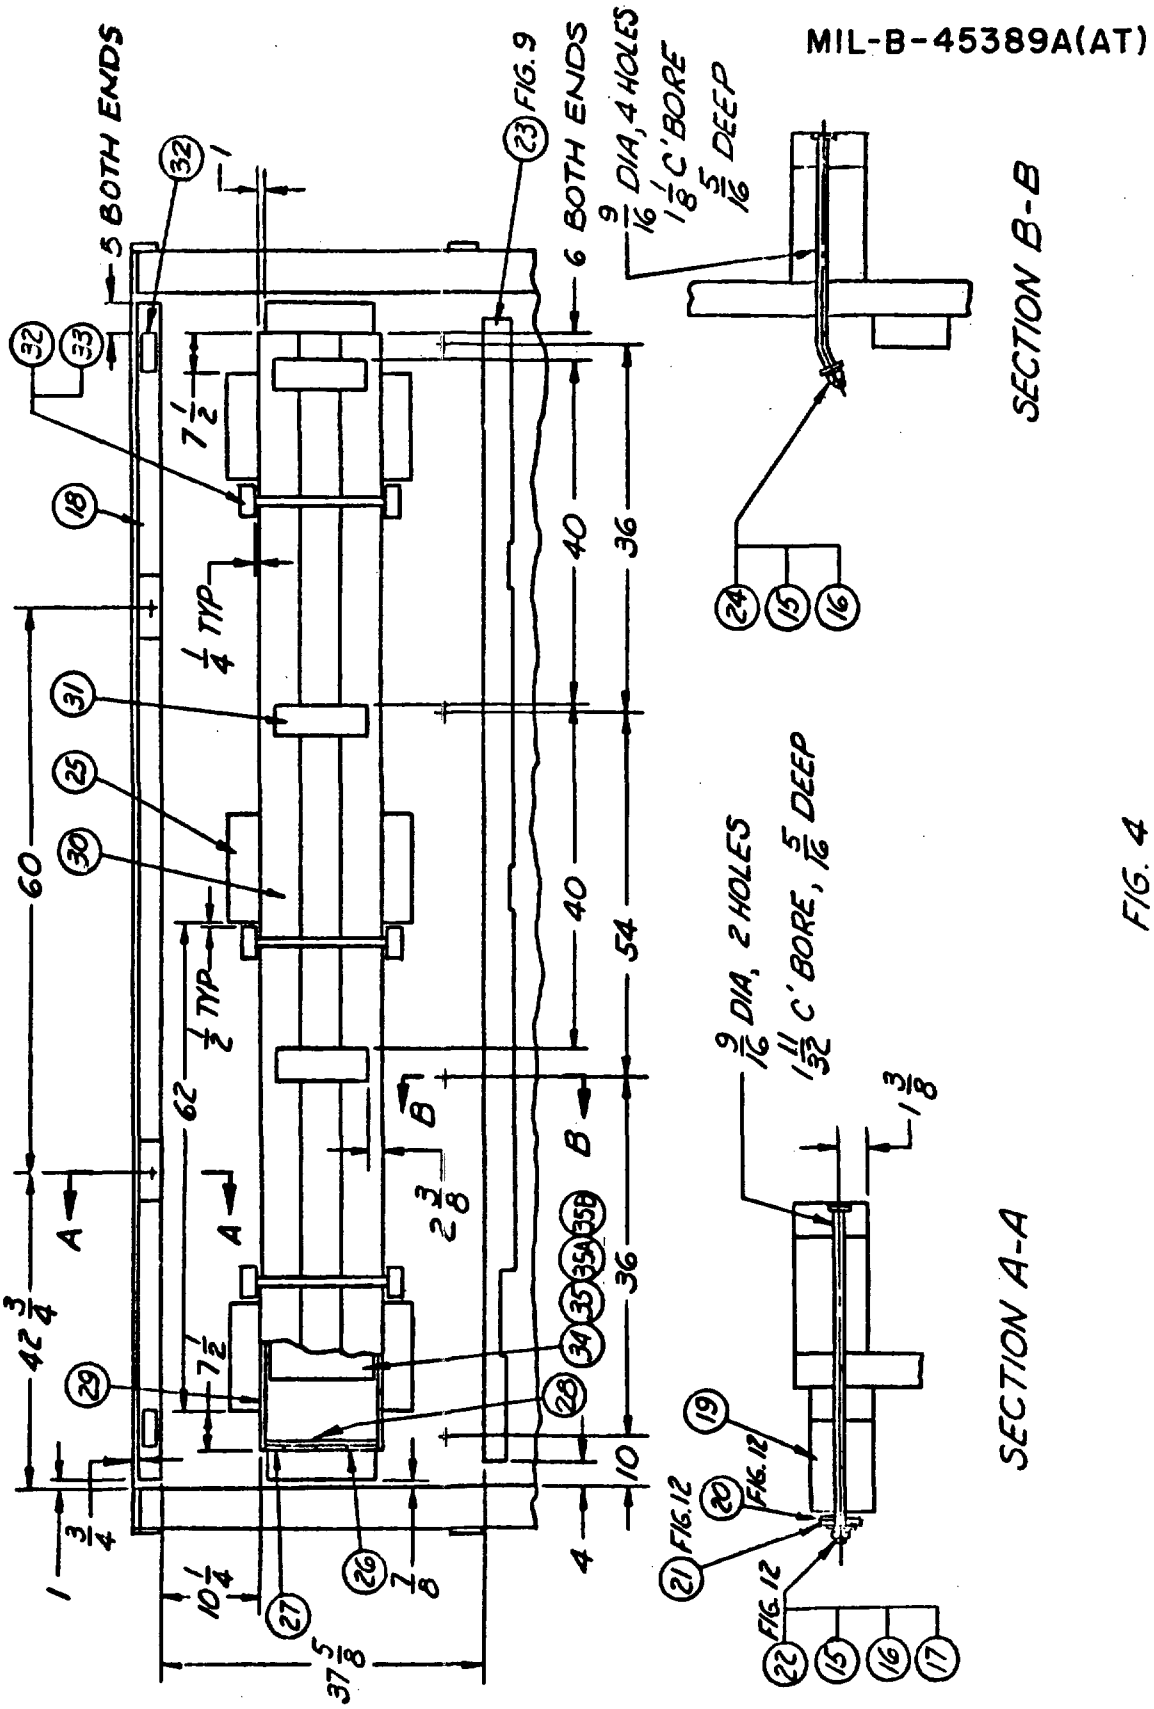


FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

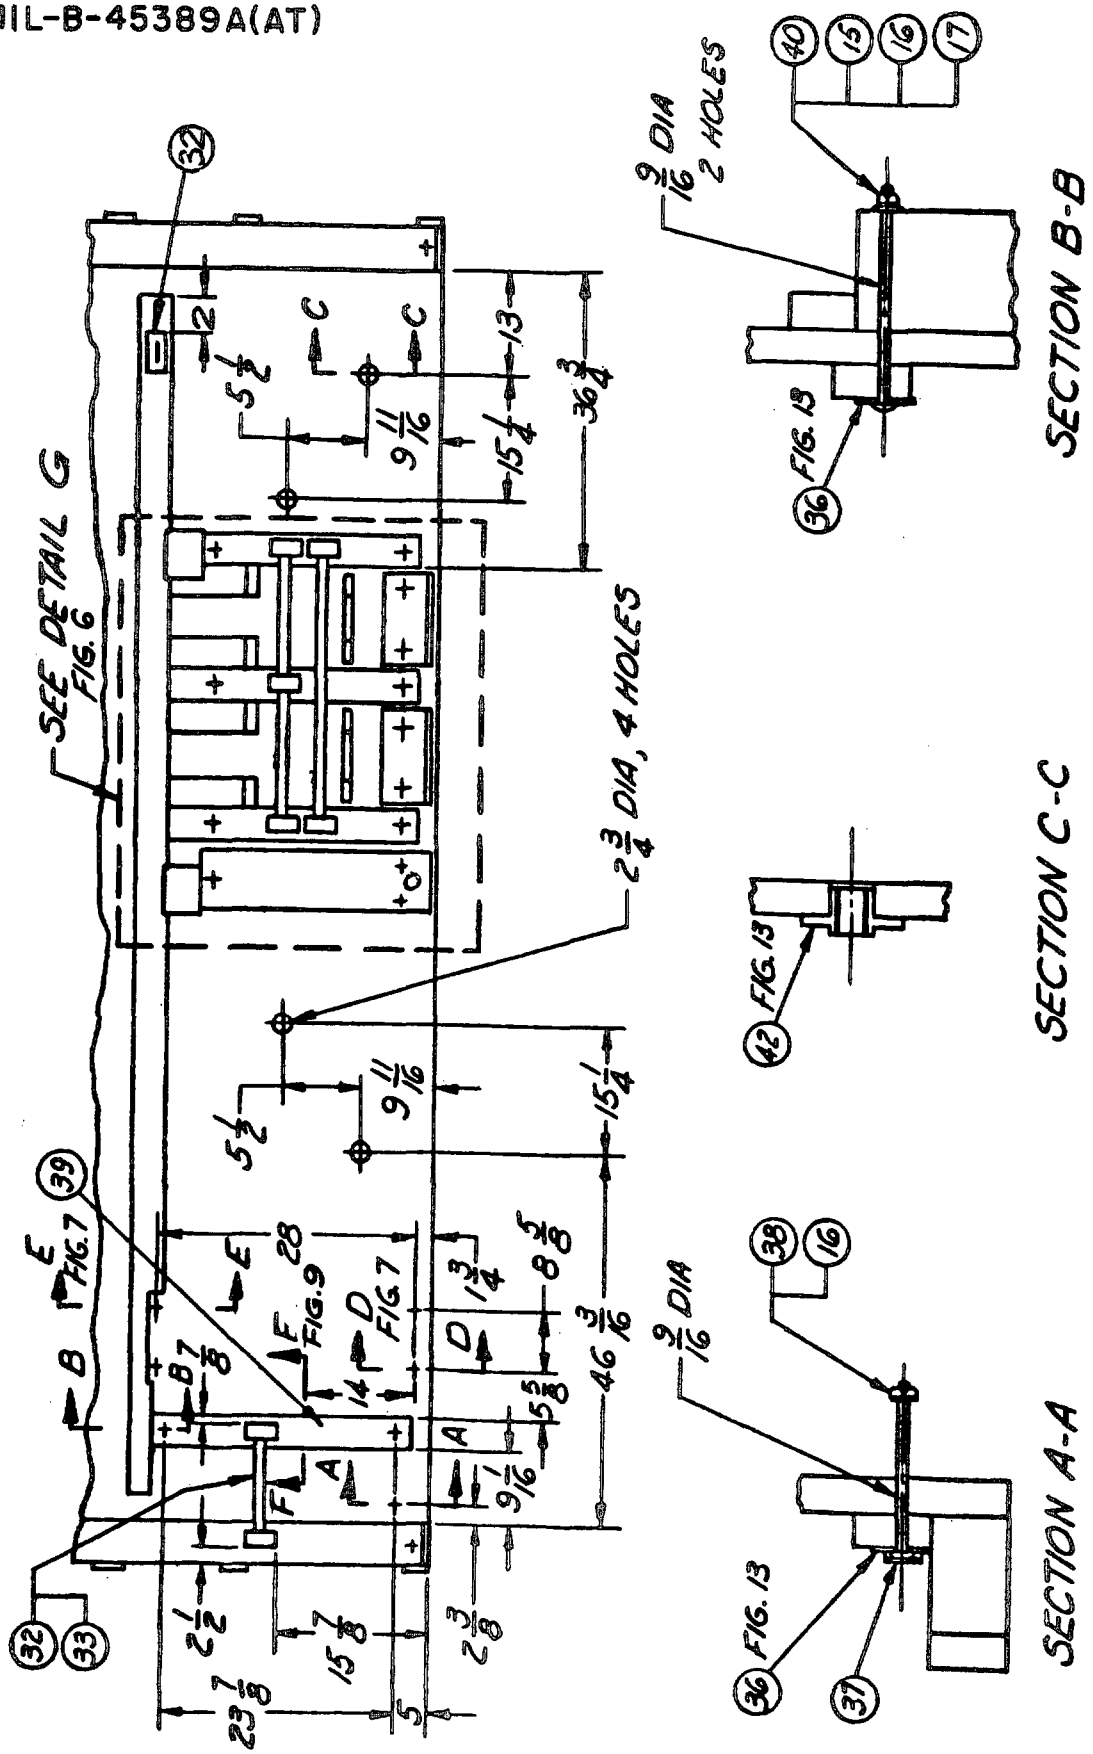


FIG. 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

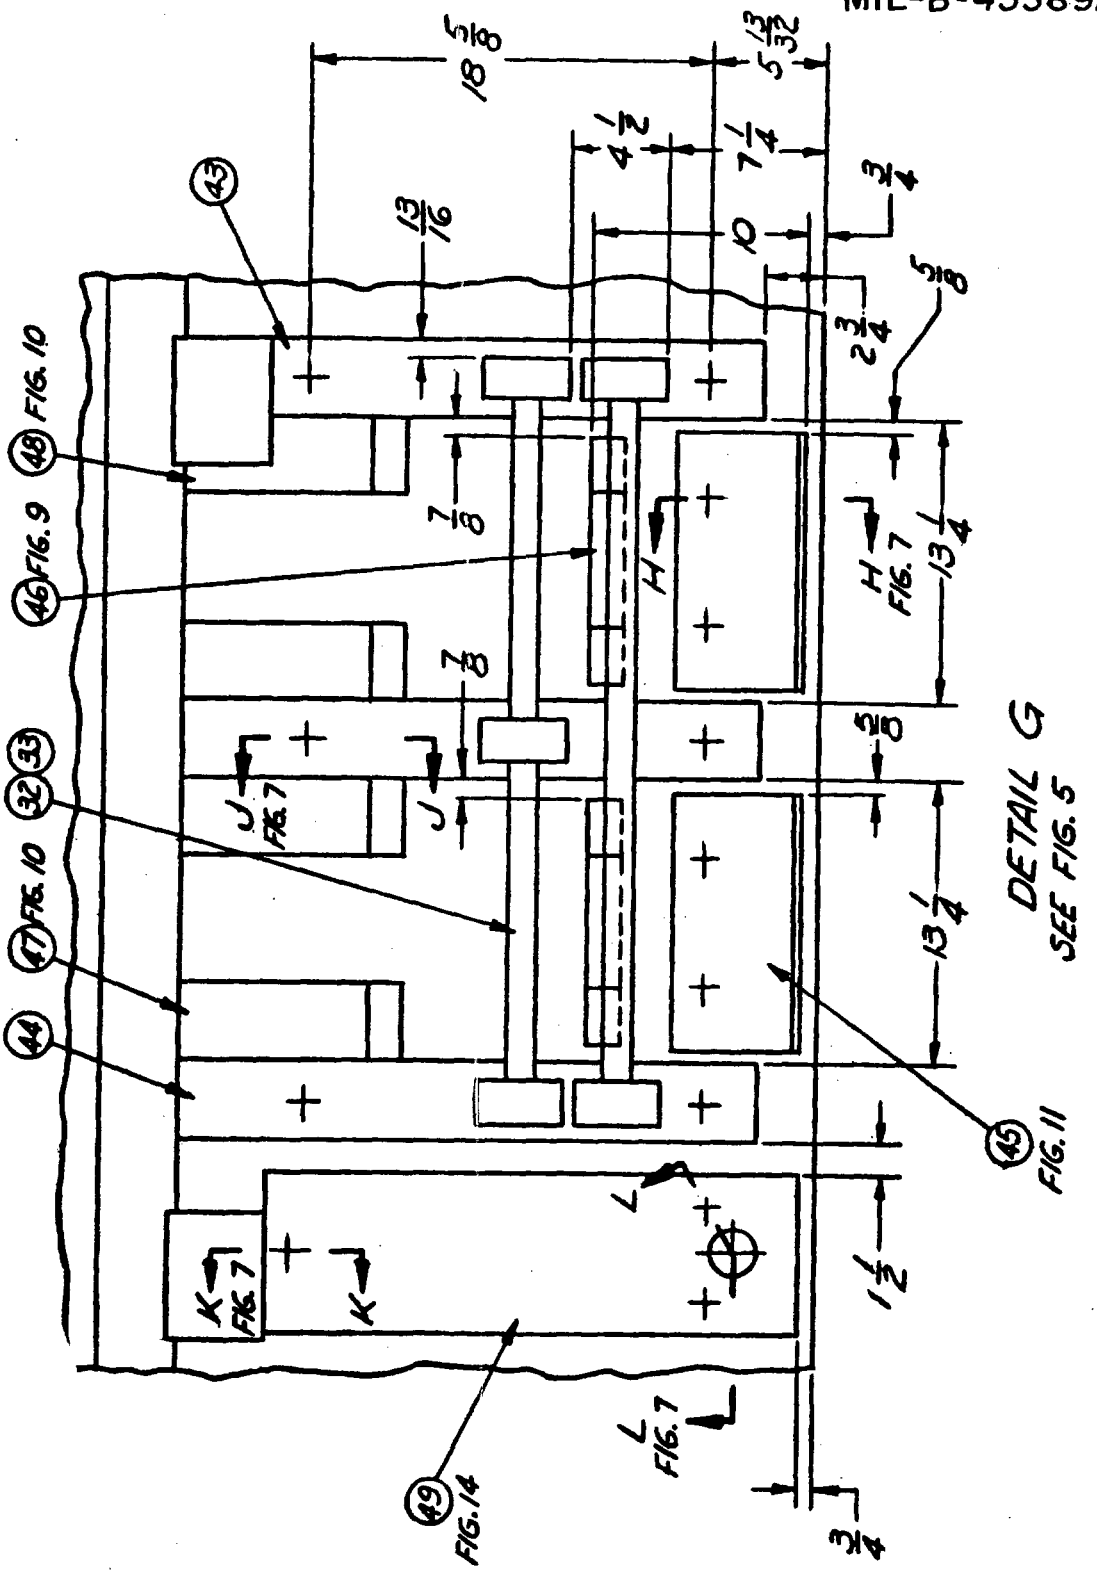


FIG. 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

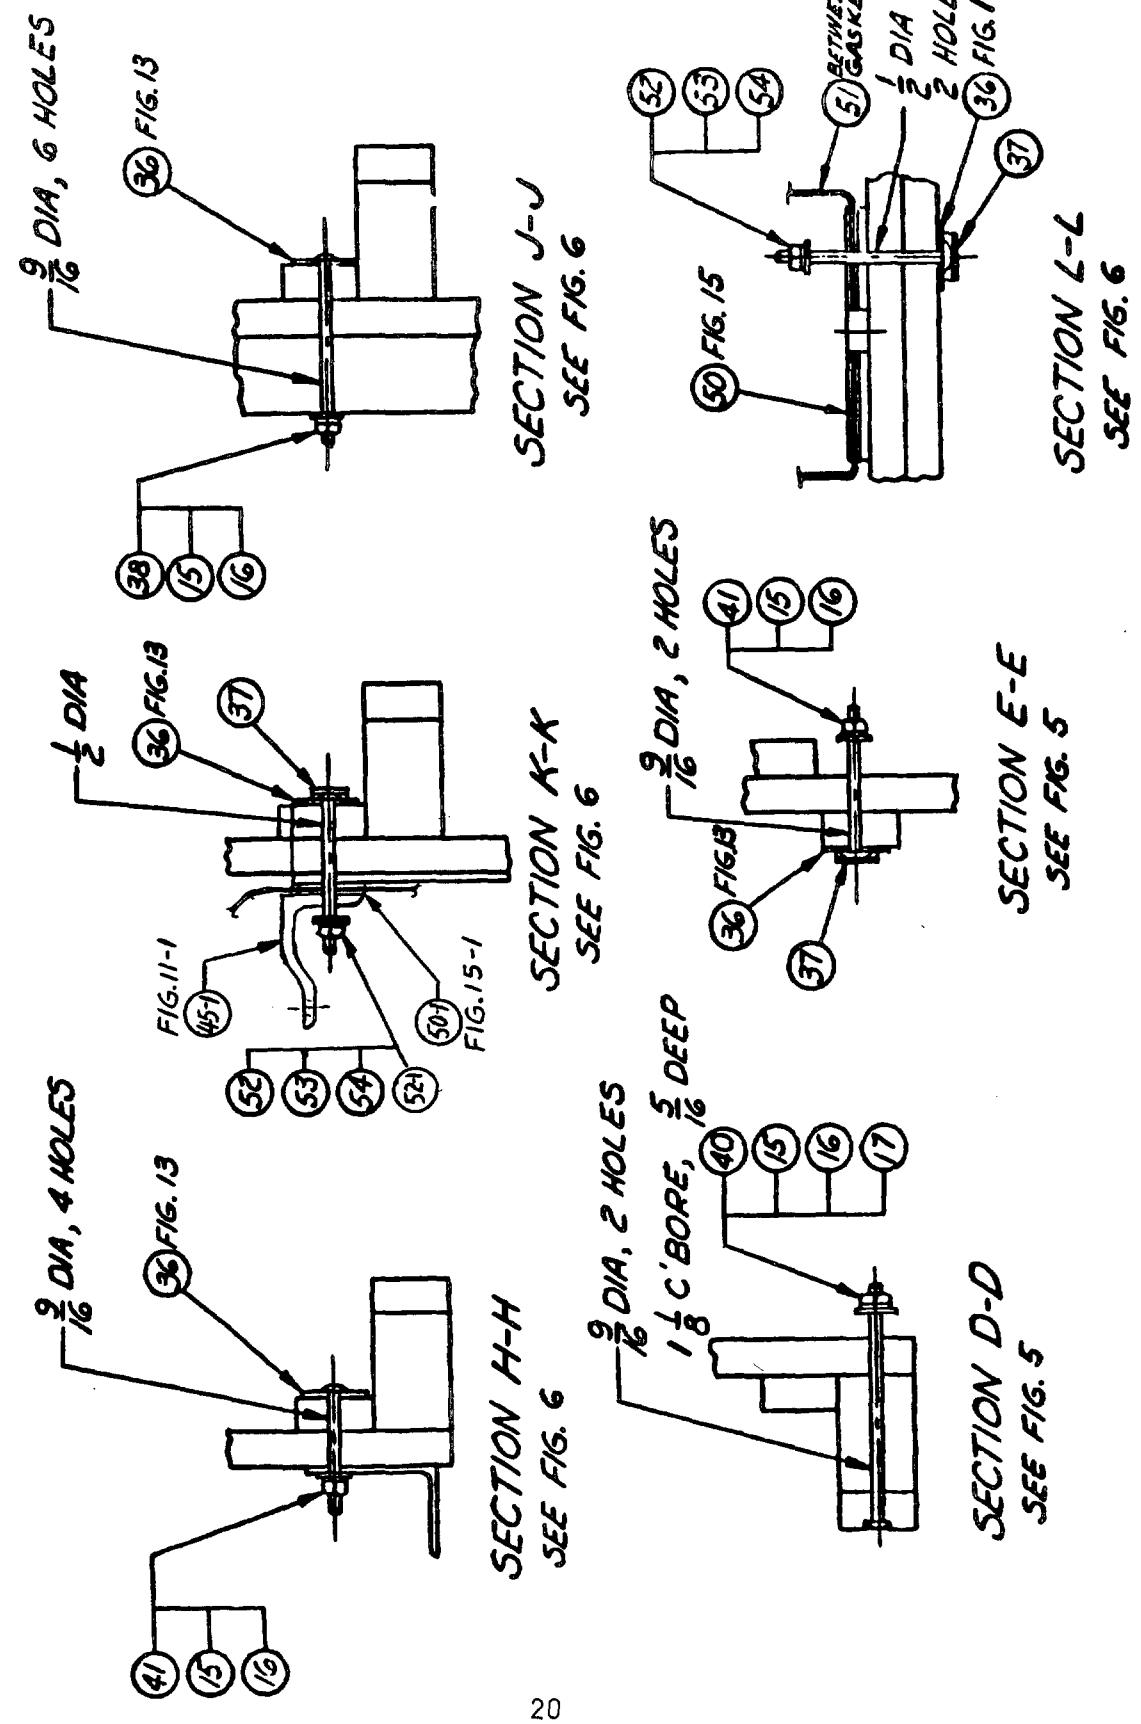


FIG. 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.



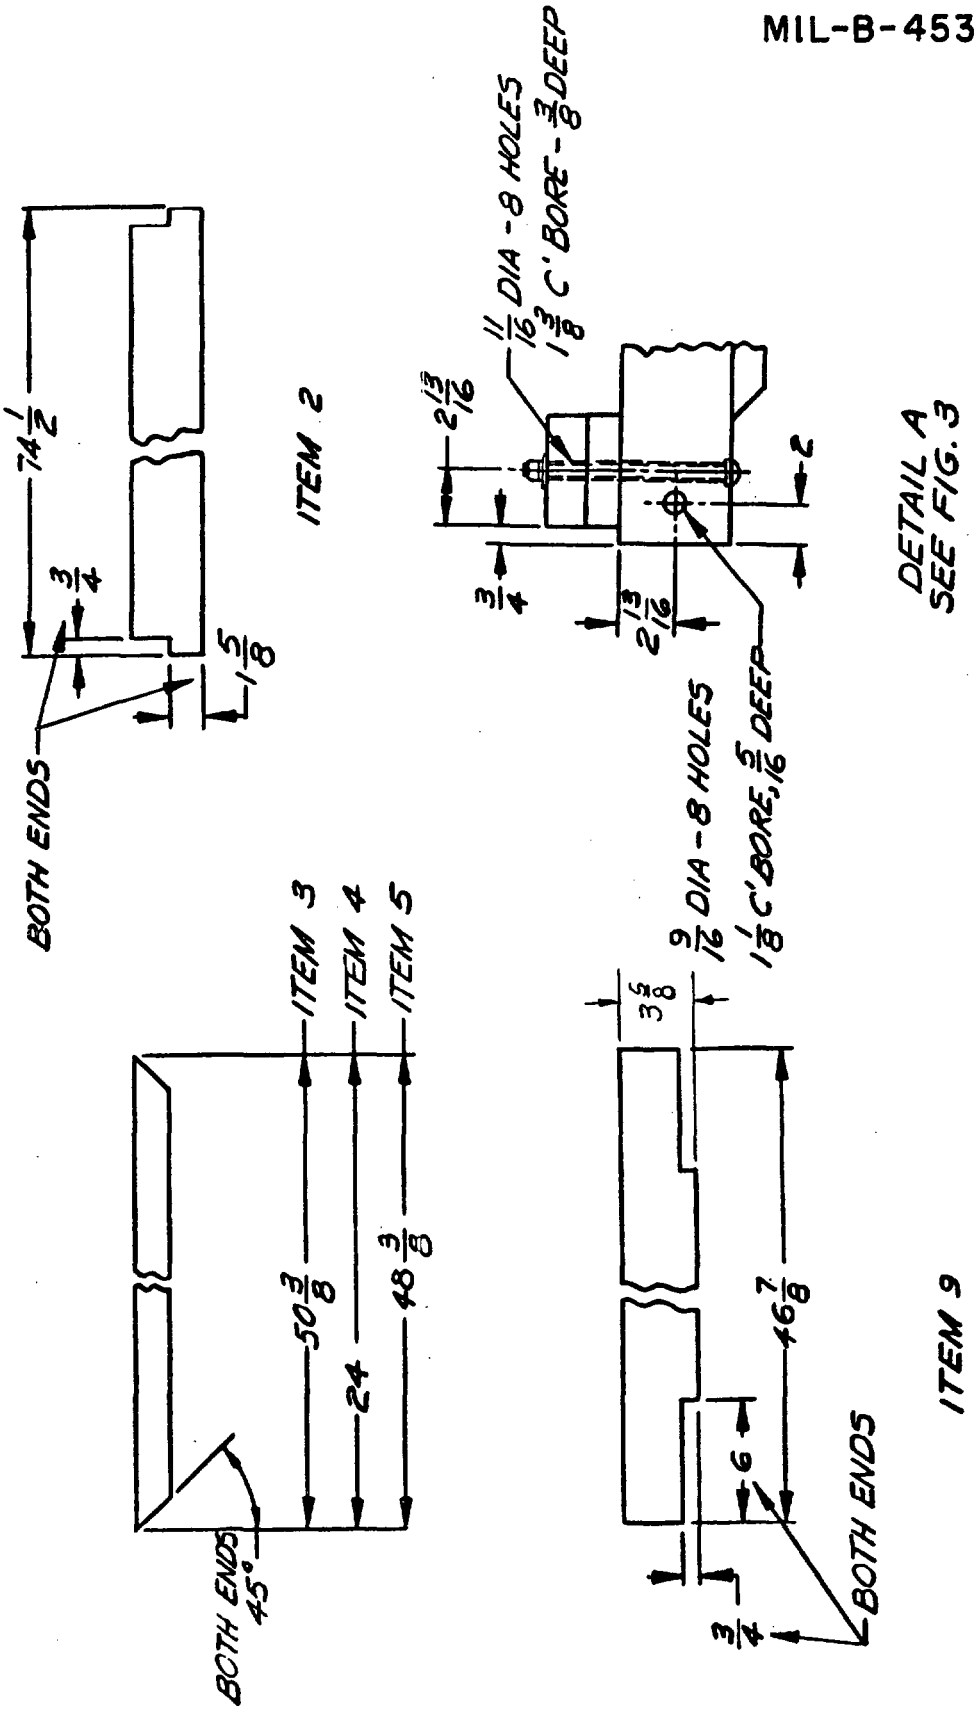



FIG. 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

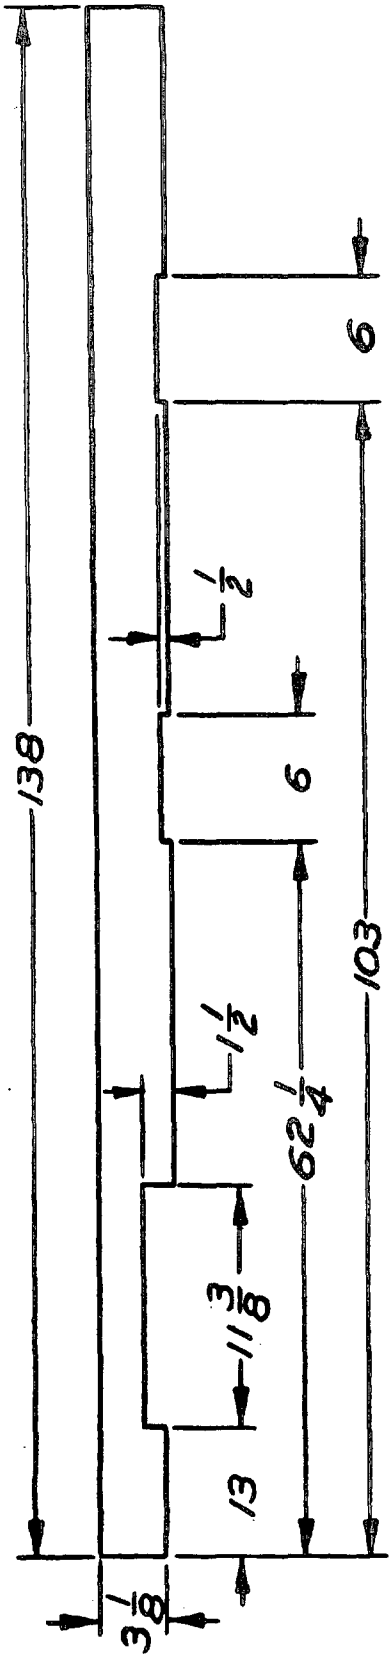

ITEM 23

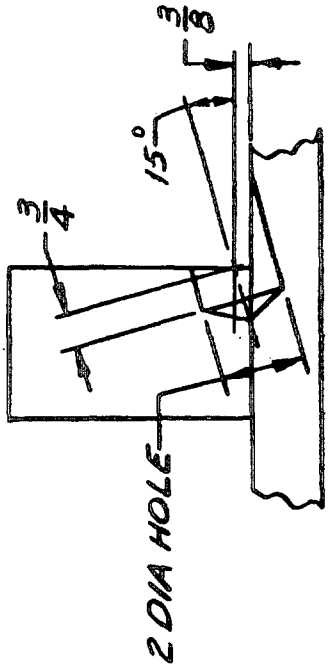


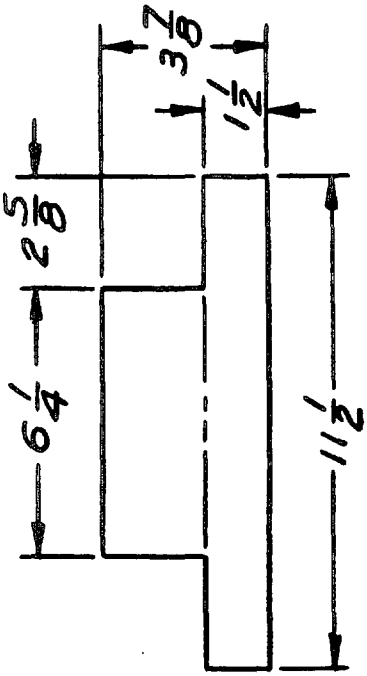

ITEM 46

FIG. 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

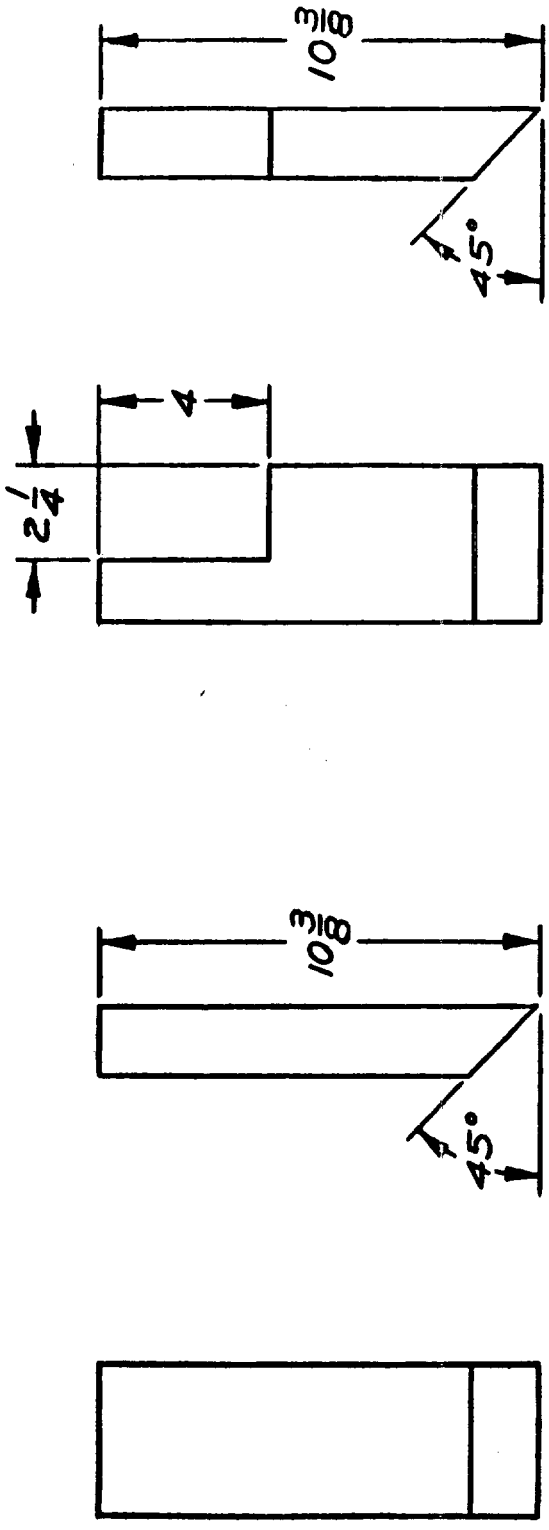


ITEM 48

ITEM 47

FIG. 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

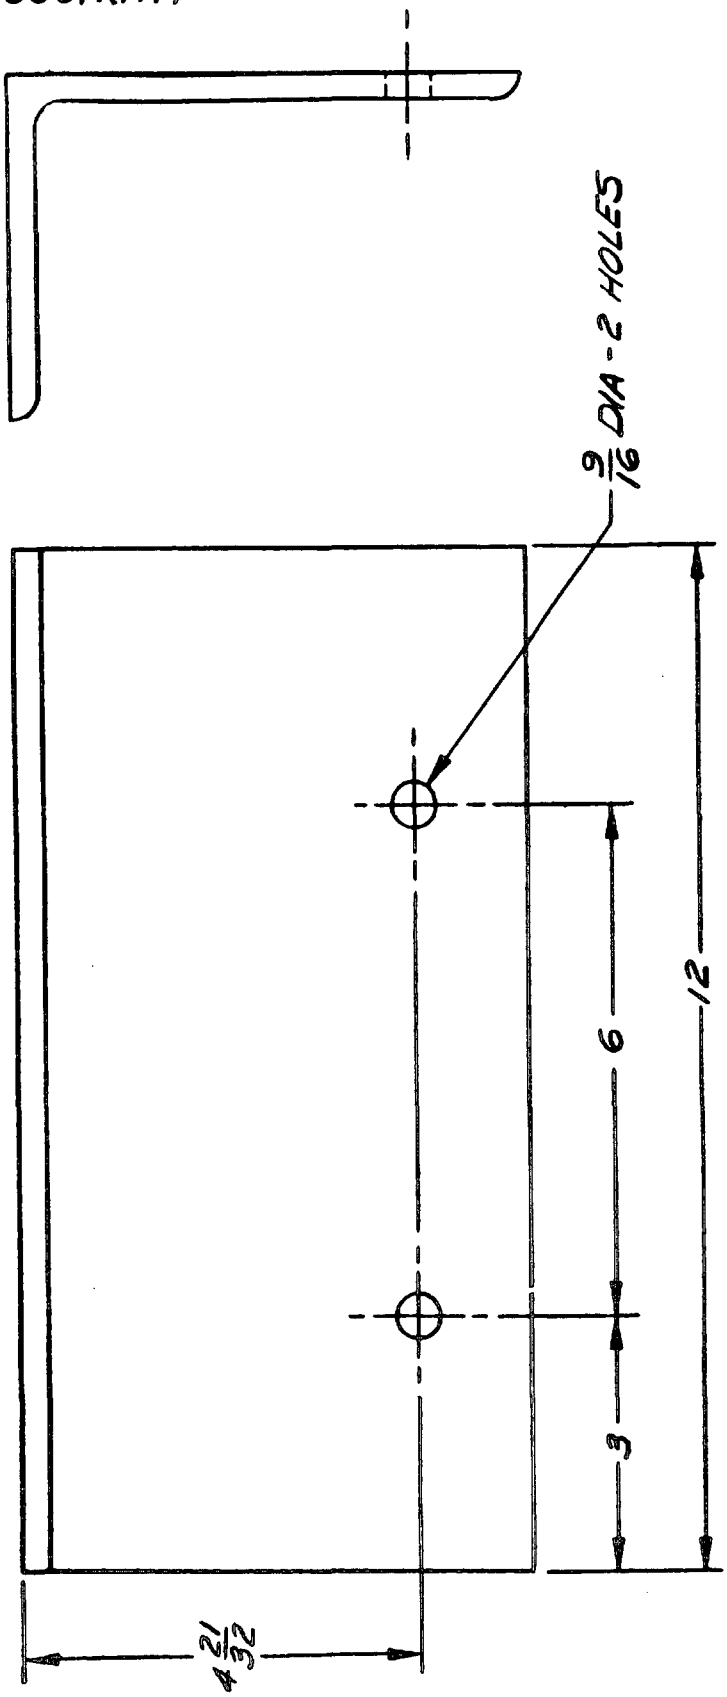


MATERIAL:
STEEL, STRUCTURAL
TYPE I, SPEC. QQ-S-741
6 x 4 x 5/16

ANGLE PLATE
ITEM 45

FIG. 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

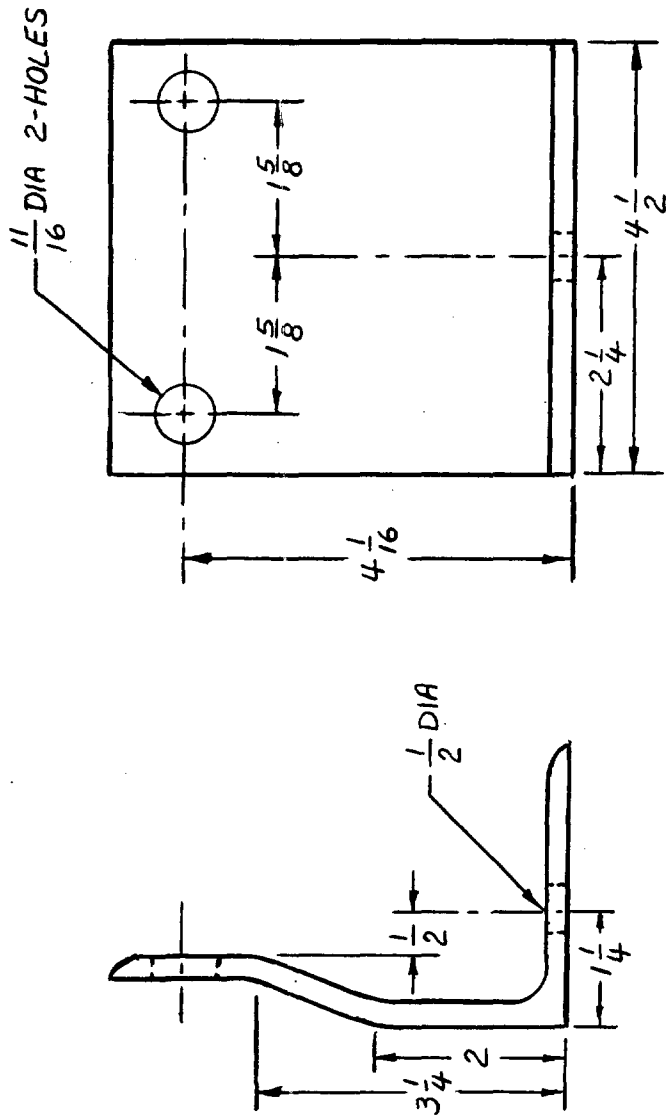

ANGLE PLATE

ITEM 45-1

FIG. 11-1

MATERIAL:
STEEL, STRUCTURAL
SPEC. QQ-S-741
5 x 3 x 1/4 ANGLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.



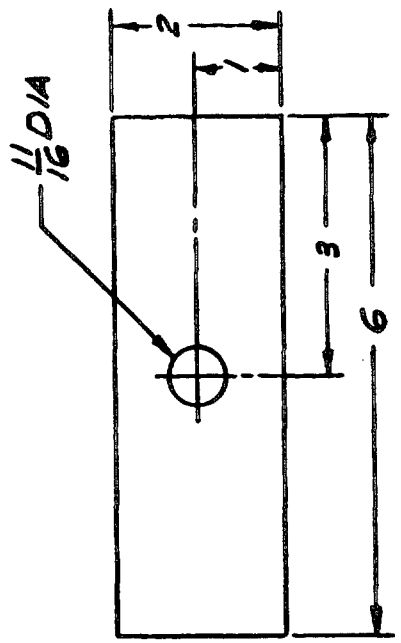


PLATE
ITEM 20

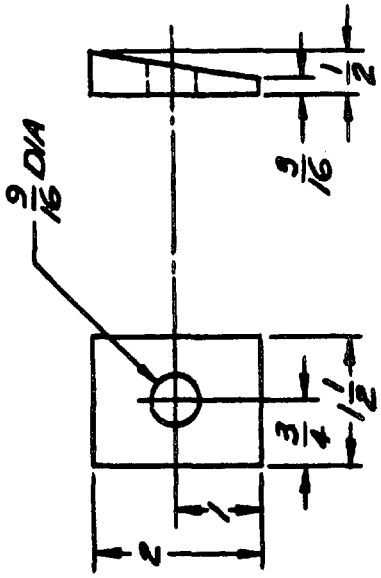

SPACER
ITEM 21

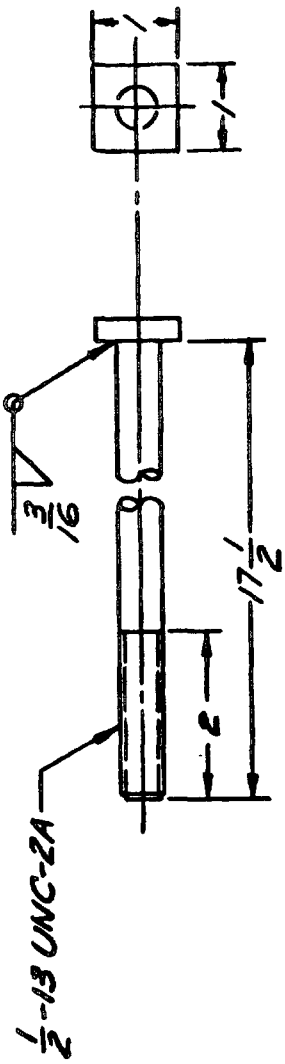

BOLT
ITEM 22


FIG. 12

ITEM'S 20 & 21
MATERIAL:
STEEL, C1010 TO C1025
SPEC. QQ-S-634
1/2 THICK

ITEM 22
MATERIAL:
STEEL, C1015 TO C1025
SPEC. QQ-S-634
1/2 DIA. ROD, 1/4 THICK PLATE

WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1183

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

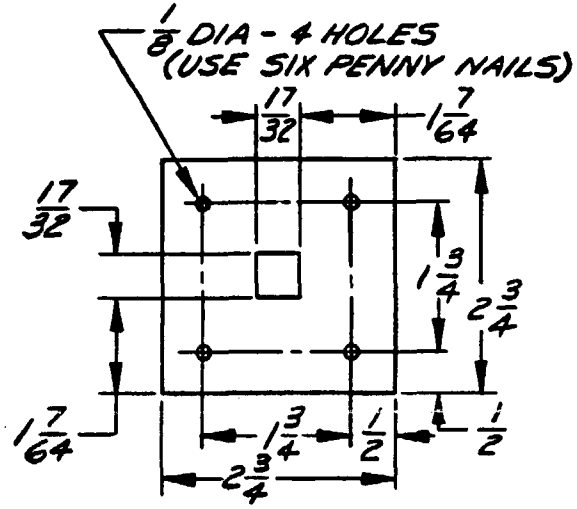

SQUARE WASHER
STEEL, FSO, CONDITION
OPTION SPEC. QQ-S-698
.190 THICK

ITEM 36


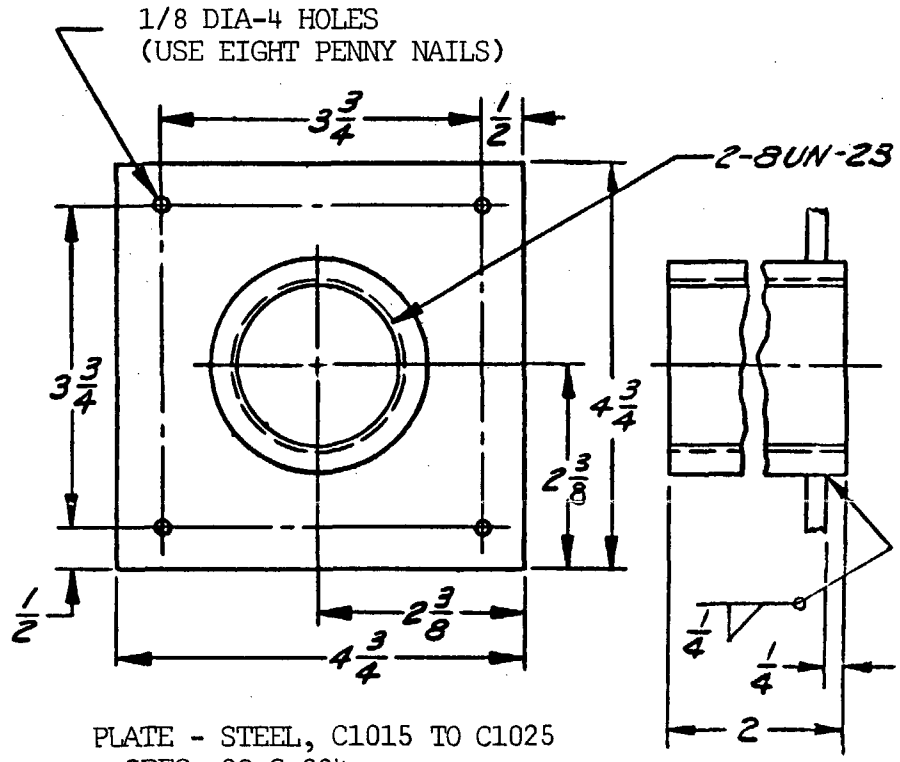


PLATE - STEEL, C1015 TO C1025
SPEC. QQ-S-634
3/8 THICK
TUBE - STEEL, SEAMLESS
COMPOSITION MT1010 TO MT1020
CONFORMING TO ASTM-A519
2 1/2 OD x 1 3/4 ID
WELD IN ACCORDANCE WITH SPEC.
MIL-STD-1183

ITEM 42


FIG. 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

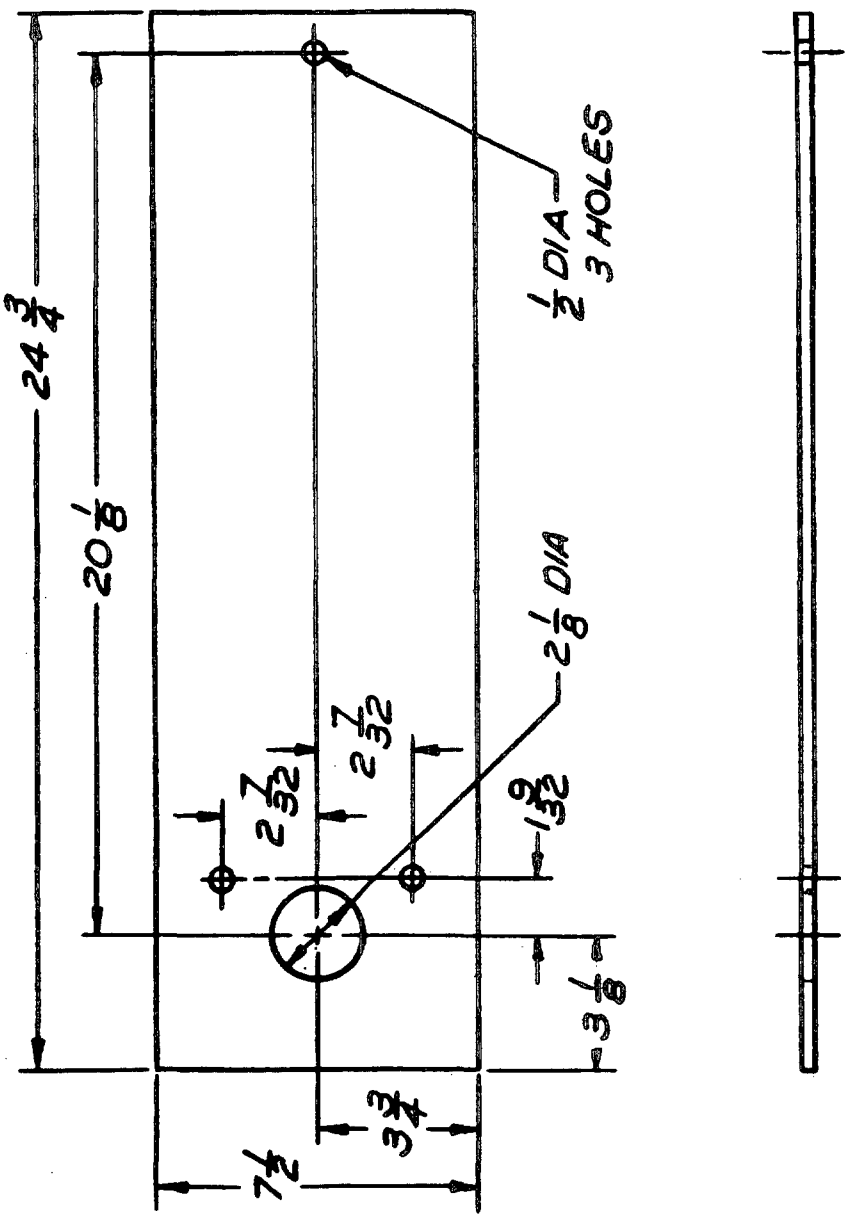

SPACER BLOCK
ITEM 49
FIG 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

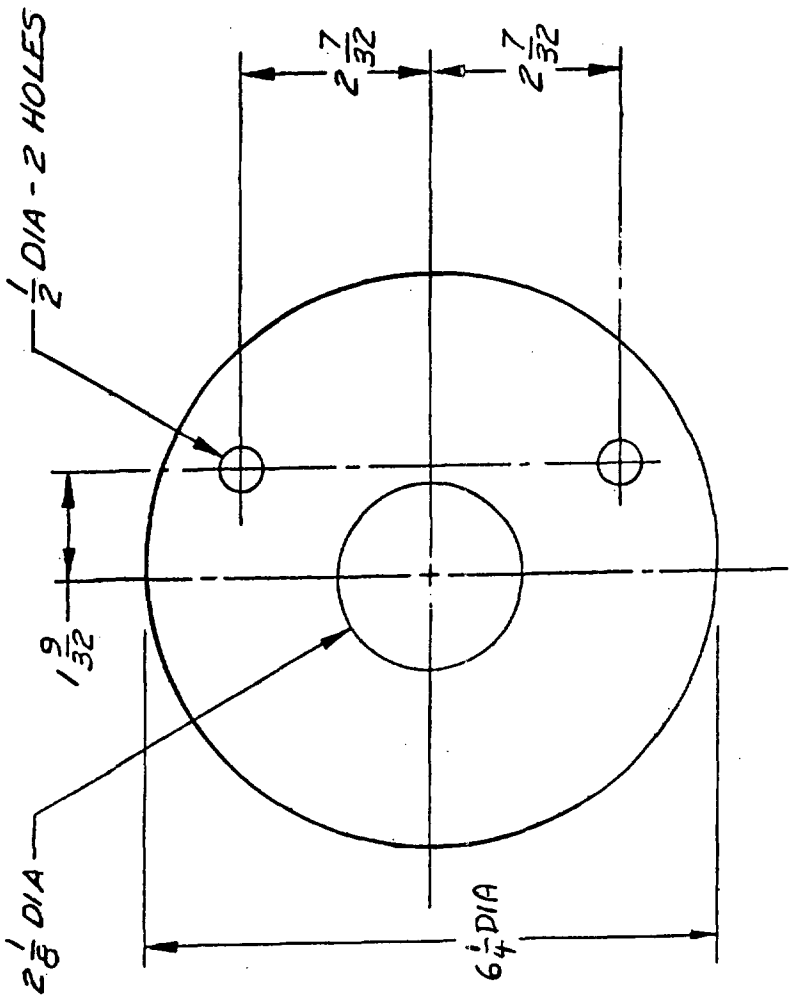


GASKET
ITEM 50

FIG. 15

MATERIAL:
GASKET. IDENT. NO. P3200-A
SPEC MIL-G-12803
1/16 THICK


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

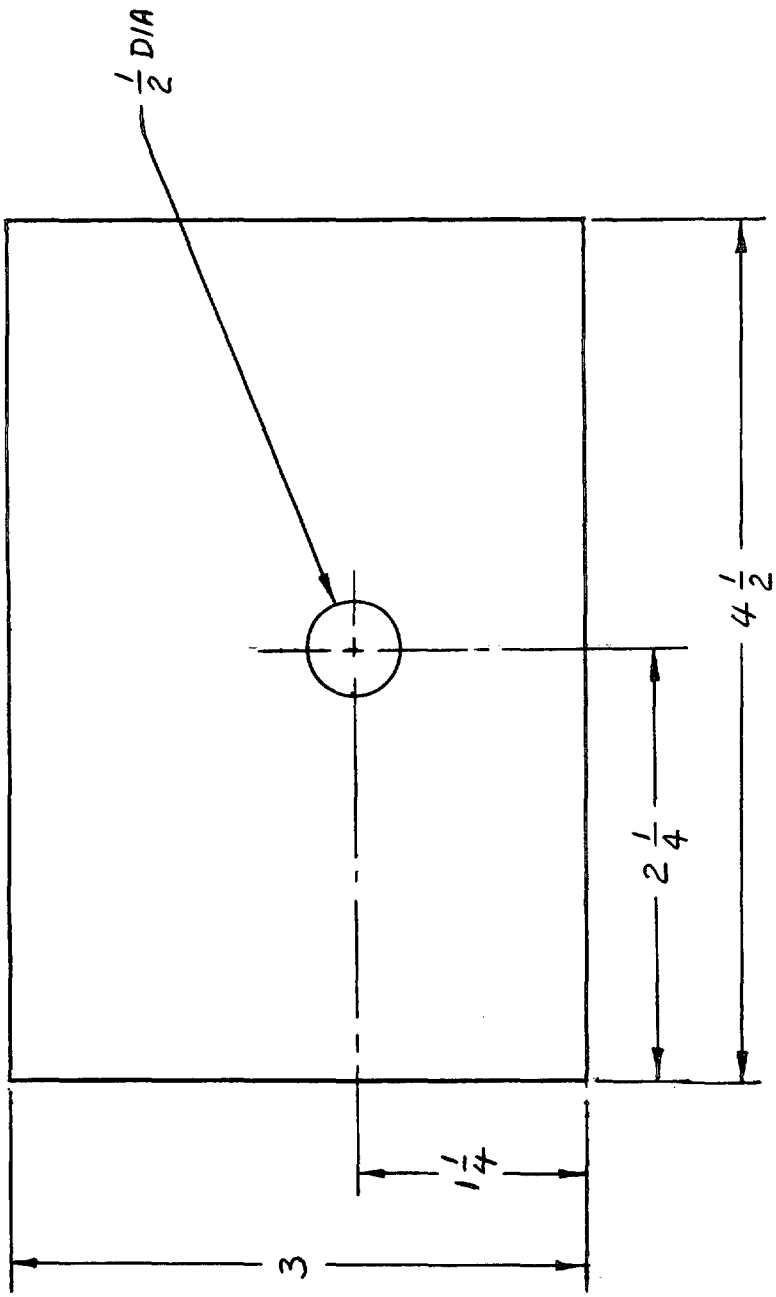


GASKET
ITEM 50-1
FIG. 16


MATERIAL:
GASKET, IDENT. NO.
P3200-A SPEC MIL-G-12803
1/16 THICK

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

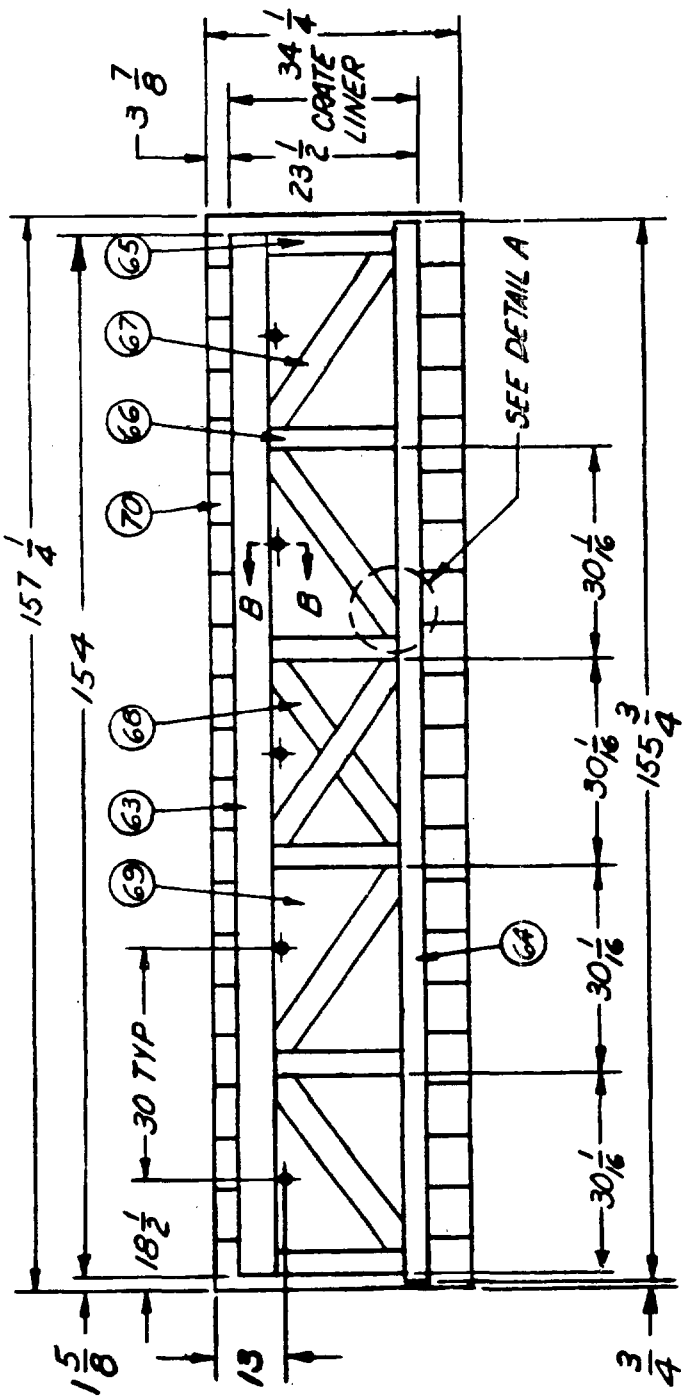



DETAIL A
TYP CORNER CONSTRUCTION
CUT TO FIT

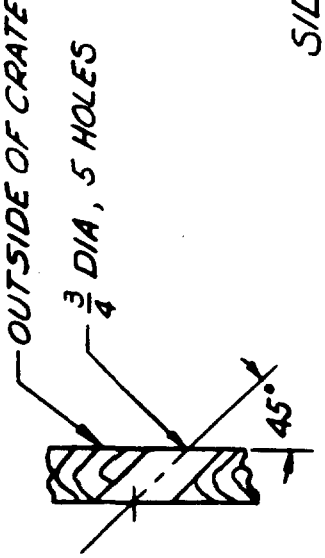


SECTION B-B


SIDE
ITEM 87

FIG. 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

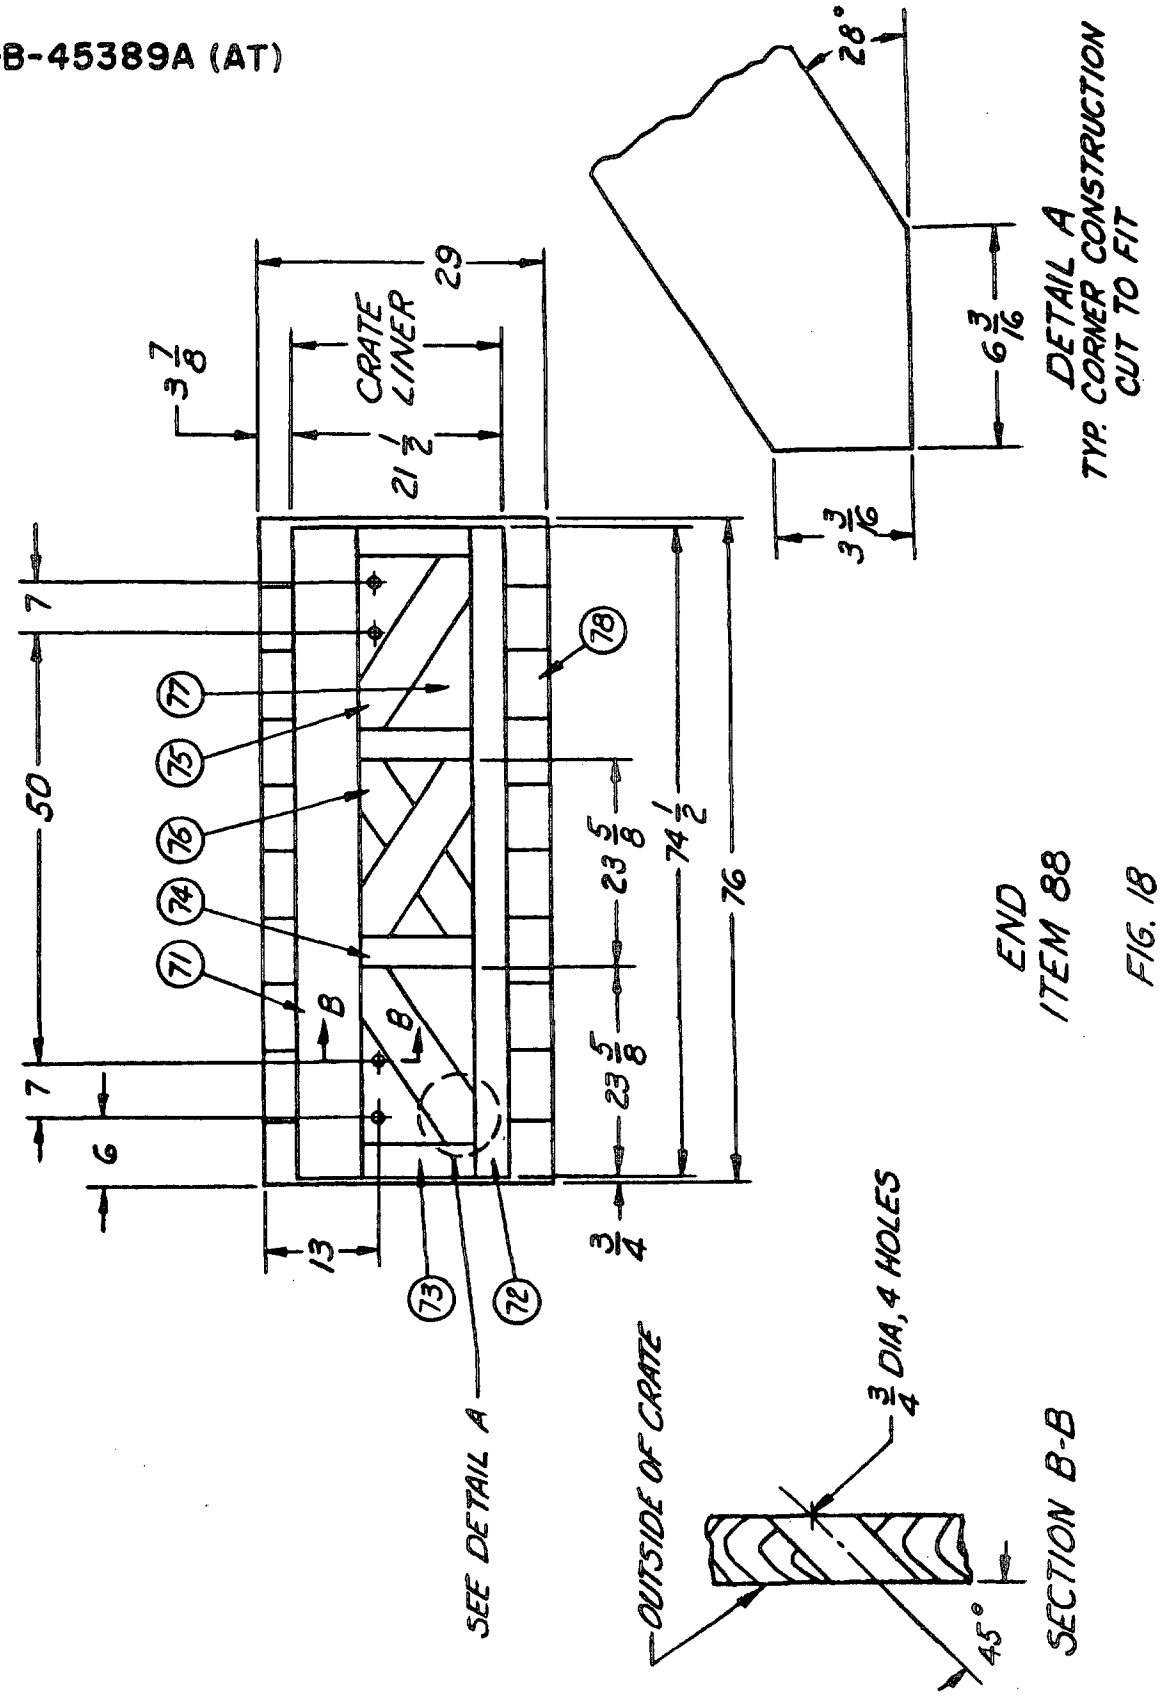


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

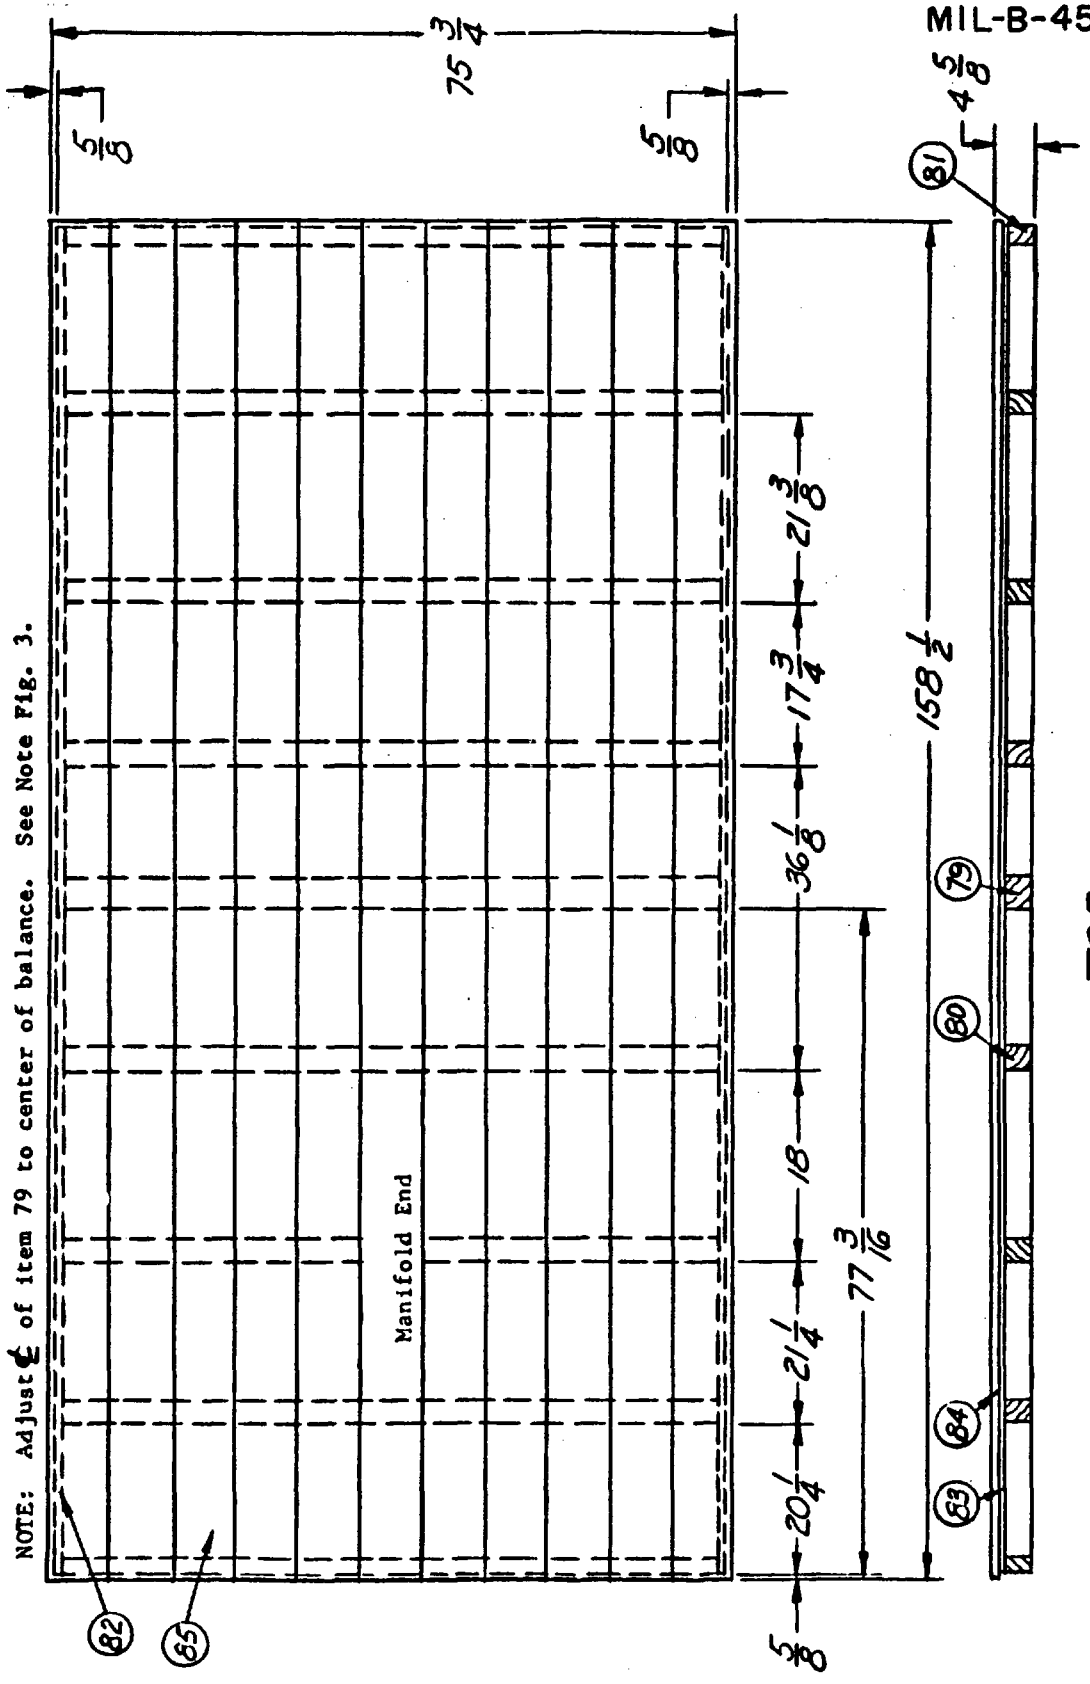

TOP
ITEM 89
FIG. 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

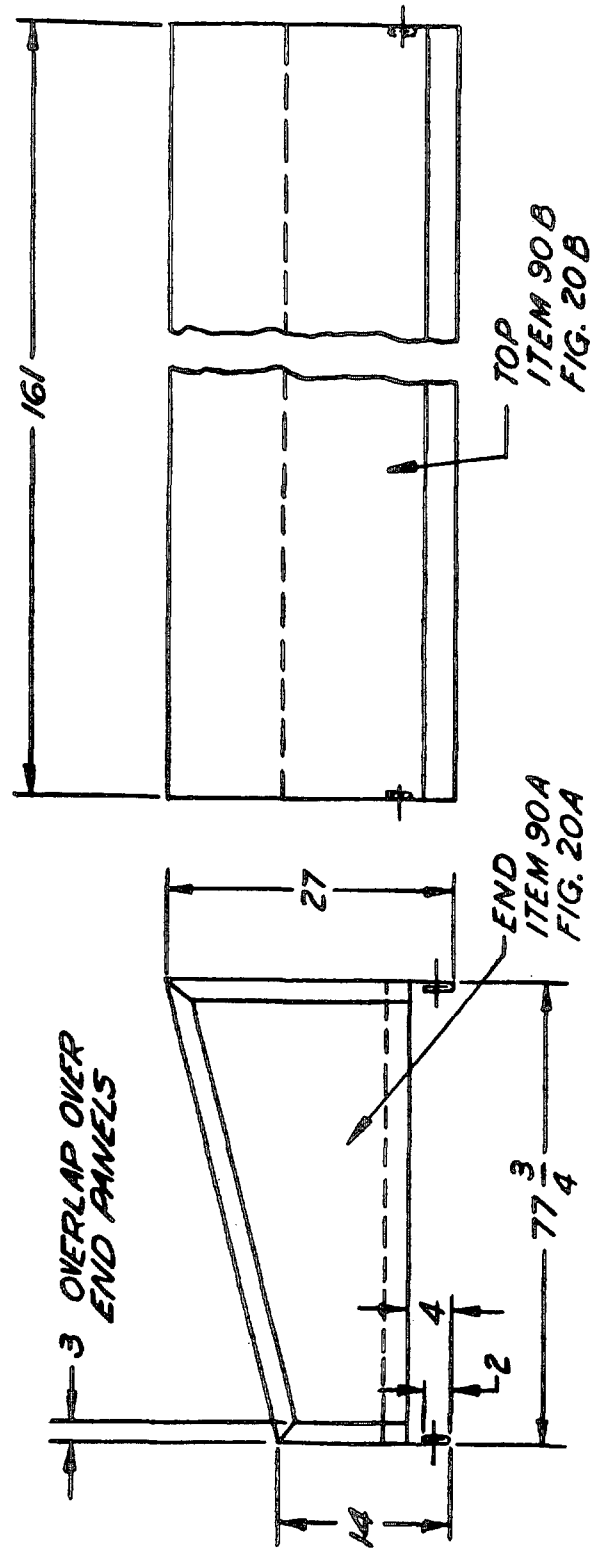


OVERLAPPED EDGES SHALL
BE SEALED TO END PANEL
WITH ADHESIVE CONFORMING
TO SPEC MMM-A-260

COVER, TAILORED
ITEM 90

FIG. 20


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

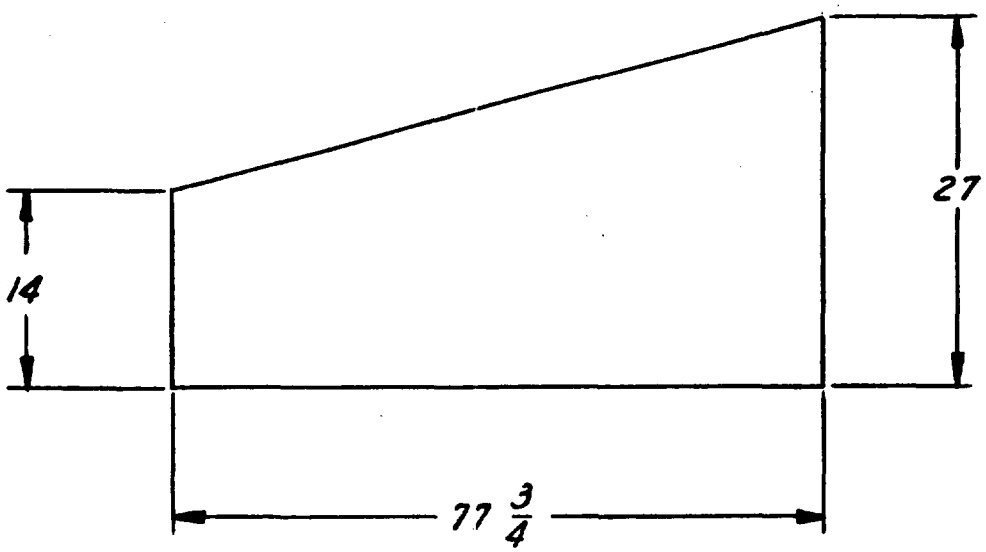

MATERIAL:
BARRIER MATERIAL CONSISTING OF 2 LAYERS CONFORMING TO PPP-B-1055
REINFORCEMENT, WITH ONE LAYER OF POLYOLEFIN, .004 INCH THICK CONFORMING L-P-378
POSITIONED BETWEEN THE TWO LAYERS OF BARRIER MATERIAL. BARRIER MATERIAL AND POLYOLEFIN SHALL BE SPOT GLUED TOGETHER WITH ADHESIVE CONFORMING TO MMM-A-260. ADHESIVE SHALL BE SPOT GLUED WITH A MAXIMUM DISTANCE BETWEEN SPOTS OF FOUR (4) INCHES.

END
ITEM 90A
FIG. 20A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

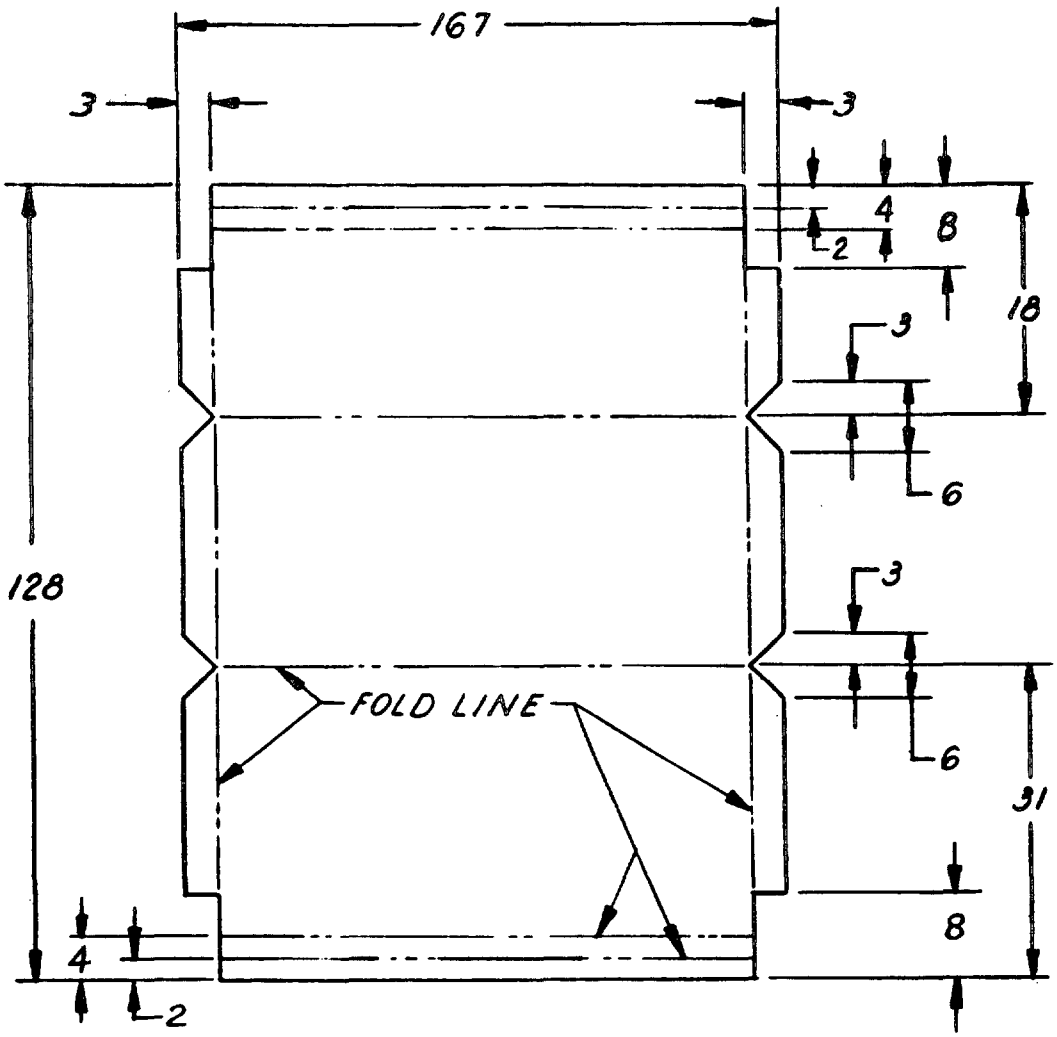

MATERIAL:
BARRIER MATERIAL CONSISTING OF 2 LAYERS CONFORMING TO PP-B-1055
REINFORCEMENT, WITH ONE LAYER OF POLYOLEFIN, .004 INCH THICK CONFORMING L-P-378
POSITIONED BETWEEN THE TWO LAYERS OF BARRIER MATERIAL.
BARRIER MATERIAL AND POLYOLEFIN SHALL BE SPOT GLUED TOGETHER WITH ADHESIVE CONFORMING TO MMM-A-260.
ADHESIVE SHALL BE SPOT GLUED WITH A MAXIMUM DISTANCE BETWEEN SPOTS OF FOUR (4) INCHES.

TOP
ITEM 90B
FIG 20B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

CRATE BILL OF MATERIAL

M9 BULLDOZER

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
96	CRATE, M9 BULLDOZER (LEVEL A AND B SHIPMENT)		1	1
86	BASE		1	2
87	SIDE		2	17
88	END		2	18
89	TOP		1	19
97	SKID, M9 BULLDOZER (LEVEL C SHIPMENT)		1	1A
86	BASE		1	2
90	COVER (TAILORED)	OPT'L	1	20
90A	END		2	20A
90B	TOP		1	20B
91	COVER (NON-TAILORED) 130 x 215, SEE FIG. 20A OR 20B FOR MATERIAL		1	
92	ANCHOR BOARD (3/4 x 3 5/8 x 157)		2	
93	ANCHOR BOARD (3/4 x 3 5/8 x 74)		2	
94	ROPE, COTTON, SPEC. T-R-571 1/4 DIA.		AS REQ'D.	
95	STAPLES	MS21309-2	AS REQ'D.	

FIG. 21

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
	BASE			
1	3 5/8 x 5 5/8 x 158 3/4		4	
2	3 5/8 x 5 5/8 x 74 1/2		2	8
3	1 5/8 x 3 5/8 x 50 3/8		4	8
4	1 5/8 x 3 5/8 x 24		4	8
5	1 5/8 x 3 5/8 x 48 3/8		4	8
6	1 5/8 x 74 1/2 x 146		1	
7	1 5/8 x 3 5/8 x 148 3/4		1	
8	1 5/8 x 3 5/8 x 30		1	
9	1 5/8 x 3 5/8 x 46 7/8		1	8
10	BOLT 5/8-11 x 10	MS35751-174	8	
11	PLAIN WASHER 5/8	MS15795-221	8	
12	LK WASHER 5/8	MS35338-50	8	
13	NUT 5/8-11	MS27040-15	8	
14	BOLT 1/2-13 x 4 1/2	MS35751-136	8	
15	PLAIN WASHER 1/2	MS15795-219	30	
16	LK WASHER 1/2	MS35338-48	31	
17	NUT 1/2-13	MS27040-14	14	
18	1 5/8 x 3 1/8 x 144		1	
19	3 1/8 x 4 1/2 x 8		2	
20	PLATE		2	12
21	SPACER		2	12
22	BOLT		2	12
23	1 5/8 x 3 5/8 x 138		1	9

FIG. 21A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
	BASE CONT.			
24	BOLT W/NUT 1/2-13 x 13	591017(BADX4.1)	4	
25	1 5/8 x 3 5/8 x 15		8	
26	3/4 x 4 5/8 x 4 1/4		6	
27	3/4 x 1 1/2 x 4 1/4		2	
28	3/4 x 4 1/4 x 15 3/8		2	
29	3/4 x 4 1/4 x 137		2	
30	3/4 x 5 5/8 x 137		3	
31	3/4 x 4 5/8 x 12		4	
32	ANCHOR PLATE (FOR 1 1/4 STRAP)		16	
33	STRAPPING W'SEALS .035 x 1/4 (NAILLESS)		AS REQ'D.	
34	FIBER BOX (15 x 15 x 3 5/8) SPEC. PPP-B-636 TYPE I, CLASS I, (INSIDE BOX METHOD 1A-14)**		1	
35	BAG, SPEC. MIL-B-117 TYPE I, CLASS E (METHOD IA-14)		1	
35A	FIBER BOX (15 1/4 x 15 1/4 x 4 1/8) SPEC. PPP-B-636 CLASS 2 GRADE W5c (OUTSIDE BOX-METHOD 1A-14)*		1	
35B	TAPE 2 INCH WIDTH SPEC. PPP-T-45 (CLOSURE OF INSIDE BOX-METHOD 1A-14)		AS REQ'D.	
36	SQUARE WASHER		18	13
37	STRAPPING-.035 x 1 1/4 (NAIL ON)		AS REQ'D.	
38	BOLT W/NUT 1/2-13 x 8	MS35751-142	7	
39	3 5/8 x 5 5/8 x 27		1	

BOX #1

BOX #2

FIG. 21B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
	BASE CONT.			
40	BOLT 1/2-13 x 10	MS35751-146	4	
41	BOLT W/NUT 1/2-13 x 5	MS35751-137	6	
42	PLATE		4	13
43	3 5/8 x 3 5/8 x 22 7/8		1	
44	3 5/8 x 3 5/8 x 26 7/8		2	
45	ANGLE		2	11
45-1	ANGLE		1	11-1
46	SUPPORT		2	9
47	1 5/8 x 3 5/8 x 10 3/8		3	10
48	1 5/8 x 3 5/8 x 10 3/8		1	10
49	1 x 7 1/2 x 24 1/4 PLYWOOD SPEC. NN-P-530		1	14
50	GASKET		2	15
50-1	GASKET		2	16
51	FLOATING BAG-METHOD II A SPEC. MIL-P-116		1	
52	BOLT 7/16-14 x 5 1/2	MS35751-112	3	
52-1	NUT	MS27040-13	3	
53	PLAIN WASHER 7/16	MS15795-217	3	
54	LK WASHER 7/16	MS35337-28	3	
55	1 5/8 x 3 5/8 x 24		1	
56	2 x 5 5/8 x 14		1	
57	FIBER BOX (38 1/2 x 13 x 3 1/4) SPEC. PPP-B-636, TYPE I, CLASS I, (INSIDE BOX-METHOD 1A-14)**		1	

BOX #3

FIG. 21C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
	BASE CONT.			
57A	BAG, SPEC. MIL-B-117 TYPE I, CLASS E METHOD 1A-14		1	
57B	FIBER BOX (38 3/4 x 13 1/4 x 3 3/4) SPEC. PPP-B-636, CLASS 2 GRADE V3C (OUTSIDE BOX-METHOD 1A-14)*		BOX #3	
58	FIBER BOX (5 1/4 x 11 x 11 1/2) (BOX 4) SPEC. PPP-B-636, TYPE 1. W6C		1	
59	WIRE, STEEL, CARBON .080 DIA. BLACK FINISH SPEC. QQ-W-461	22-W-1633-160 (BFWXI)	AS REQ'D	
60	TAPE, 2 INCH WIDTH SPEC. PPP-T-76 (CLOSURE OF OUTSIDE BOXES METHOD 1 & 1A-14)		AS REQ'D	
62	FIBER BOX (14 1/2 x 10 x 6) SPEC. PPP-B-636, TYPE I, CLASS I, (INSIDE BOX-METHOD 1A-14)**		1	
62A	BAG, SPEC. MIL-B-117 TYPE I, CLASS E METHOD 1A-14		BOX #5 1	
62B	FIBER BOX (14 3/4 x 10 1/4 x 6 1/2) SPEC. PPP-B-636, CLASS 2, GRADE W5C (OUTSIDE BOX-METHOD 1A-14)*			
**	SEE ITEM 35B FOR CLOSURE TAPE OF INSIDE BOXES			
*	SEE ITEM 60 FOR CLOSURE TAPE OF OUTSIDE BOXES			
	SIDE			
63	1 5/8 x 7 1/2 x 154		1	
64	3/4 x 3 5/8 x 12 3/8		1	
65	1 5/8 x 3 5/8 x 12 3/8		2	
66	3/4 x 3 5/8 x 12 3/8		4	
67	3/4 x 5 5/8 x 29 3/16		5	
68	3/4 x 5 5/8 x 13 5/16		2	

FIG. 21D

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM	MAT'L SIZE OR PART NAME	ORD. NO.	QTY.	FIG.
	BASE CONT.			
69	BARRIER MATERIAL SPEC. PPP-B-1055		AS REQ'D	
70	3/4 x 34 1/4 x 157 1/4		1	
	END			
71	1 5/8 x 7 1/2 x 74 1/2		1	
72	3/4 x 3 5/8 x 74 x 1/2		1	
73	1 5/8 x 3 5/8 x 10 3/8		2	
74	3/4 x 3 5/8 x 10 3/8		2	
75	3/4 x 5 5/8 x 22 1/2		3	
76	3/4 x 5 5/8 x 9 13/16		2	
77	BARRIER MATERIAL SPEC. PPP-B-1055		AS REQ'D	
78	3/4 x 29 x 76		1	
	TOP			
79	3 5/8 x 3 5/8 x 73		1	
80	2 5/8 x 3 5/8 x 73		6	
81	1 5/8 x 3 5/8 x 73		2	
82	3/4 x 2 5/8 x 157 1/4		2	
83	1/4 x 74 1/2 x 157 1/4 PLYWOOD SPEC. NN-P-530		1	
84	LINER, ROOFING FELT SPEC. SS-R-501 (45 LBS. MIN. WT)		AS REQ'D	
85	3/4 x 75 3/4 x 158 1/2		1	

FIG. 21E

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

PACKING LIST

KIT, BULLDOZER, EARTH-MOVING TANK-MOUNTING, M9 FOR M60 TANK

TABLE OF CONTENTS

	FIG. NO.
UNBOXED ITEMS	22A-22D
BOX NO. 1	22E-22H
BOX NO. 2	22I-22J
BOX NO. 3	22J-22K
BOX NO. 4	22K
BOX NO. 5	22K

FIG. 22

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

UNBOXED ITEMS

ITEM NO.	FIG.	PART NO.	PART NAME	QTY.
A	FIG. 23	11659092	BLADE ASSY	1 W/
		11659027	PUSH BEAM ASSY	2
		11659028	ARM ASSY	2
		11637640-1	PIN	4
		11637640-2	PIN	2
		11637640-4	PIN	2
		11637640-5	PIN	2
		11637640-6	PIN	2
		11637238	LOCK	12
		MS90726-160	SCREW	12
		MS35335-39	LK WASHER	12
B	FIG. 24	10883747	MANIFOLD ASSY	1 W/
		8396828	SWIVEL ASSY	1
		7363052	UNION	1
		7699877	PAD	2
		10883885	PIN	2
		MS35303-116	SCREW	1
		MS35303-114	SCREW	5
		MS35337-29	LK WASHER	6
		MS15795-219	WASHER	6
		MS35291-165	SCREW	2
		MS35337-31	LK WASHER	2
		MS15795-220	WASHER	4
		MS35291-63	SCREW	6
		MS35339-27	LK WASHER	6
		137185	COTTER PIN	2
C	FIG. 25	12257383	RESERVOIR ASSY	1
D	FIG. 26	10883626	BRACKET, MTG, L	1 W/
		8709446	CAP	2
		223868	BOLT	6
		MS35338-53	LK WASHER	6
		8709448	CAP	1
		10911673	SCREW	3
		8715761	NUT	3
		10883772	PIN	1
		MS90725-64	SCREW	3
		MS35338-46	LK WASHER	3
		MS35303-117	SCREW	1
		MS35337-29	LK WASHER	4
		MS15795-218	WASHER	4
		MS35303-113	SCREW	3

FIG. 22A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

UNBOXED ITEMS (CONT'D)

ITEM NO.	FIG.	PART NO.	PART NAME	QTY.
		11659061-1	ARM	1
		11637640-3	PIN	1
		11637238	LOCK	1
		MS90726-160	SCREW	1
		MS35335-39	LK WASHER	1
E	FIG. 26	10883627	BRACKET, MTG, R	1 W/
		8709446	CAP	2
		223868	BOLT	6
		MS35338-53	LK WASHER	6
		8709448	CAP	1
		10911673	SCREW	3
		8715761	NUT	3
		10883772	PIN	1
		MS90725-64	SCREW	3
		MS35338-46	LK WASHER	3
		MS35303-117	SCREW	1
		MS35337-29	LK WASHER	4
		MS15795-218	WASHER	4
		10933861	EYE ASSY.	1
		7739108	BOLT	1
		MS35303-113	SCREW	3
		11659061-2	ARM	1
		11637640-3	PIN	1
		11637238	LOCK	1
		MS90726-160	SCREW	1
		MS35335-39	LK WASHER	1
F	FIG. 27	10940668	POWER TAKE-OFF ASSY.	1 W/
		7340002	FLANGE	4
		MS35291-111	SCREW	8
		MS35337-29	LK WASHER	8
		10940666	RING ASSY.	1
		7383694	GASKET	1
		MS90725-35	SCREW	2
		MS35338-26	LK WASHER	2
		54684	GASKET	2
G	FIG. 28	10940524-1	CYLINDER & RAM ASSY.	1 W/
		MS35291-109	SCREW	4
		8724192	REDUCER	2
		7383745	GUARD	1
		MS90728-112	SCREW	4
		MS35337-29	LK WASHER	8
		7383742	GUARD	1
		MS35303-113	SCREW	4
		MS15795-219	GUARD	1
		MS27183-18	WASHER	4

FIG. 22B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

UNBOXED ITEMS (CONT'D)

ITEM NO.	FIG.	PART NO.	PART NAME	QTY.
		MS35303-113	SCREW	4
		MS35337-29	LK WASHER	4
		MS15795-219	WASHER	4
		8744719	LUG	4
H	FIG. 28	10940524-2	CYLINDER & RAM ASSY	1 W/
		MS35291-109	SCREW	4
		8724192	REDUCER	2
		7383745	GUARD	1
		MS90728-112	SCREW	4
		MS35337-29	LK WASHER	8
		7383743	GUARD	1
		MS35303-113	SCREW	4
		MS15795-219	WASHER	4
		10883762	GUARD	1
		MS27183-18	WASHER	4
		MS35303-113	SCREW	4
		MS35337-29	LK WASHER	4
		MS15795-219	WASHER	4
		8744719	LUG	4
I	FIG. 29	10883789	GUARD	1 W/
		MS35291-110	SCREW	5
		MS35337-29	LK WASHER	6
		MS35303-114	SCREW	2
		MS15795-219	WASHER	3
		503282	NUT	3
		10883774	BRACKET	1
		MS35291-111	SCREW	1
		MS35291-114	SCREW	1
J	FIG. 29	10883769	GUARD	1 W/
		10883768	PLATE	1
		MS35291-110	SCREW	2
		MS35337-29	LK WASHER	2
K	FIG. 30	10884065	GUARD LH	1 W/
		MS35303-113	SCREW	1
		MS35337-29	LK WASHER	1
		MS15795-219	WASHER	1
L	FIG. 30	10884066	GUARD RH	1 W/
		MS35303-113	SCREW	1

FIG. 22C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

UNBOXED ITEMS (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
		MS35337-29	LK WASHER	1
		MS15795-219	WASHER	1
M	FIG. 31	10884207	GUARD	1 W/
		10884187	GASKET	1
		10884179	COVER	1
		MS35291-62	SCREW	6
		MS35339-27	LK WASHER	10
		10884184	BELLCRANK ASSY.	1
		MS35291-61	SCREW	4
*MI	FIG. 32	10887388	HOUSING ASSY	1 W/
		108874361	SHAFT	1
		10887490	ARM	1
		10887407	ARM	1
		124543	KEY	2
		10885434	LK WASHER	1
		MS35337-29	LK WASHER	1
		MS15795-218	WASHER	1
		MS35690-823	NUT	1
		MS35337-26	LK WASHER	1
		MS15795-212	WASHER	1
		MS35690-523	NUT	1
		*MS35304-216	SCREW	2
N	FIG. 33	10884243	GUARD	1 W/
		10884206	GASKET	1
		10884198	COVER	1
		MS35291-62	SCREW	4
		MS35339-27	LK WASHER	4
		10887481	LINK ASSY.	1
		10915544	SCREW	1
		10887471	BOLT, SHOULDER	1
		MS35337-27	LK WASHER	1
O	FIG. 34	8675761	HOSE ASSY.	1
P	FIG. 34	10883802	TUBE	1
Q	FIG. 34	10883803	TUBE	1
R	FIG. 34	10883823	TUBE	1

*HOUSING ASSY ITEM MI AND 2-MS35304-216 SCREWS TO BE PACKAGED INSIDE OF ITEM M GUARD.

FIG. 22D

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

UNBOXED ITEMS (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
S	FIG. 34	10883825	TUBE	1
T	FIG. 34	10883886	TUBE	1
U	FIG. 34	10883887	TUBE	1
V	FIG. 34	10883600	PLATE	1
W	FIG. 34	10884145	GUARD ASSY.	1
X	FIG. 34	10884146	GUARD ASSY.	1
		12257356	FIXTURE	1
		12257357	FIXTURE	1
		7953755	BRACKET	2

BOX 1

Y	FIG. 35	10884493	HANGER	1 W/
		MS35291-111	SCREW	1
		MS35337-29	LK WASHER	3
		MS35690-803	NUT	3
		10884494	PLATE	1
		MS35291-113	SCREW	2

NOTE: THE FOLLOWING QUANTITIES ARE REQUIRED TO MAKE (2) ASSEMBLIES OF ITEM Z.

Z	FIG. 36	8709802	HOOK	2 W/
		MS51054-74	SCREW	2
		MS35691-33	NUT	2
AA	FIG. 37	10940698	BRACKET	1 W/
		7699818	SPACER	4
		MS90726-114	SCREW	4
		MS35338-29	LK WASHER	4
AB	FIG. 38	10883659	ELBOW	1 W/
		7340000	FLANGE	2
		MS35291-89	SCREW	4
		MS35337-28	LK WASHER	4
		10883657	FLANGE	2
		MS35291-113	SCREW	6
		MS35337-29	LK WASHER	6

FIG. 22E

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 1 (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
AC	FIG. 39	10883660	ELBOW	1 W/
		7340001	FLANGE	2
		MS35291-113	SCREW	10
		MS35337-29	LK WASHER	10
		10883657	FLANGE	2
AD	FIG. 40	8675765	HOSE ASSY.	1 W/
		7339950	ELBOW ASSY.	1
		7335558	SEAL ASSY.	1
		10884527	ADAPTER	1
AE	FIG. 41	8675765	HOSE ASSY.	1 W/
		7339950	ELBOW	1
		7335558	SEAL ASSY.	1
AF	FIG. 42	11590939	SHAFT	1 W/
		8709801	ARM	1
		MS35756-14	KEY	1
		MS90725-117	SCREW	1
		MS35338-48	LK WASHER	1
AG	FIG. 43	10883696	HANDLE ASSY.	1 W/
		10883667	SUPPORT	1
		MS35691-37	NUT	1
		MS35812-11	CLEVIS	1
		MS35810-6	CLEVIS PIN	1
		MS24665-353	COTTER PIN	1
AH	FIG. 44	10884430	ROD	1 W/
		10883915	LUG	2
		MS35291-59	SCREW	2
		MS15795-214	WASHER	2
		585994	PIN	2
		10940378-1	BRACKET	1
		10940378-2	BRACKET	1
AI	FIG. 45	10884201	U-BOLT	1 W/
		10884203	SPACER	1
		MS35338-29	LK-WASHER	2
		MS15795-219	WASHER	2
		MS35690-803	NUT	2

FIG. 22F

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 1 (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
NOTE:	THE FOLLOWING QUANTITIES ARE REQUIRED TO MAKE (2) ASSEMBLIES OF ITEM AJ.			
AJ	FIG. 46	10883657	FLANGE	8 W/
		MS35291-116	SCREW	12
		MS35337-29	LK WASHER	12
		MS35690-803	NUT	12
AK	FIG. 47	10887731	BLOCK	1
		10915469-2	SUPPORT	1
		MS35292-111	SCREW	2
		MS35337-29	LK WASHER	2
		MS15795-218	WASHER	2
AL	FIG. 47	10887731	BLOCK	1
		10915469-1	SUPPORT	1
		MS35292-111	SCREW	2
		MS35337-29	LK WASHER	2
		MS15795-218	WASHER	2
		10883827	TUBE	1
		10883658	PLATE	2
		10884205	BRACKET	1
		10883785	GUARD	1
		8675762	HOSE ASSY.	1
		10883645	BRACKET	5
		10873961	BRACKET	5
		8686843-1	HOSE ASSY.	1
		8686844-1	HOSE ASSY.	1
		10883821	GUARD	2
		7350920	ELBOW	4
		10905215	NIPPLE	2
		10899965	ELBOW	2
		7339970	ELBOW	2
		10899964	HOSE ASSY.	2
		10900387	HOSE ASSY.	2
		10899963	ELBOW	4
		10887736	ROD ASSY.	1
		10887738	ROD ASSY.	1
		10884196	GUARD	1
		10887737	ROD ASSY.	1
		10887739	ROD ASSY.	1
		10940226-1	SUPPORT	1
		10952187	BLOCK	2

FIG. 22G

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 1 (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
		10940226-2	SUPPORT	1
		10883783	SUPPORT	1
		10883784	SUPPORT	1
		10883780	GUARD	2
		7699894	SPROCKET ASSY.	1
		10884255	BRACKET	1
		10952230	COVER ASSY.	4
		12257283	SUPPORT	2
		12257289-1	STOP	1
		12257289-2	STOP	1
		12257287	GUSSET	2
		12257286-1	STOP	1
		12257286-2	STOP	1
		12257291	SPACER	4
		10952095	WRENCH, SPANNER	1
		MS16146-2	WRENCH, SPANNER	1
		BOX 2		
		MS35291-5	SCREW	2
		MS35292-36	SCREW	3
		MS35292-7	SCREW	4
		MS35303-66	SCREW	8
		MS35304-206	SCREW	10
		MS35304-215	SCREW	12
		171482	SCREW	4
		MS35763-33	BOLT	4
		MS35763-68	BOLT	4
		10883763	BOLT	2
		10883650	BOLT	2
		10887246	BOLT	4
		MS90728-4	SCREW	2
		11640676	BOLT (SEE NOTE ON FIG. 23)	4
		MS35337-26	LK WASHER	4
		MS35337-27	LK WASHER	4
		MS35333-23	LK WASHER	4
		MS35338-51	LK WASHER (SEE NOTE ON FIG. 23)	4

FIG. 22H

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 2 (CONT'D)

ITEM	FIG.	PART NO.	PART NAME	QTY.
		MS35338-33	LK WASHER	10
		MS35338-51	LK WASHER	4
		MS27183-10	WASHER	2
		MS15795-214	WASHER	6
		MS15795-215	WASHER	8
		MS27183-16	WASHER	5
		MS15795-218	WASHER	18
		MS15795-219	WASHER	4
		MS15795-222	WASHER	6
		7027834	WASHER	1
		10873955	WASHER	10
		MS35690-402	NUT	18
		MS35690-1228	NUT	4
		MS35691-622	NUT	6
		7383581	NUT	4
		MS51967-23	NUT (SEE NOTE ON FIG. 23)	4
		MS35691-45	NUT	2
		MS35335-19	LK WASHER	4
		MS35338-44	LK WASHER	2
		MS27183-14	WASHER	2
		MS51812-25	NIPPLE	2
		MS51815-37	ELBOW	1
		MS51819-37	ADAPTER	1
		AN6240-1	FILTER	1
		11590958	BUSHING	4
		12257378	ELBOW	1
		MS35763-37	SCREW	4
		MS90726-92	SCREW	5
		MS35338-28	LK WASHER	5
		MS35291-34	SCREW	1
		121224	COTTER PIN	4
		500875	FASTENER	4
		588146	RIVET	4
		MS35743-18	RIVET	8
		MS90726-115	SCREW	2
		MS35690-825	NUT	2
		MS35338-29	LK WASHER	2
		MS27183-18	WASHER	2
		MS24665-426	COTTER PIN	6
		MS90727-169	SCREW	4
		11590958	BUSHING	4

FIG. 22I

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 3

ITEM	FIG.	PART NO.	PART NAME	QTY.
AM	FIG. 48	10951613	BRACKET	1 W/
		10951610	LEAD ASSY.	1
		MS39061-1	SWITCH	1
		8376499	LAMP ASSY.	1
		420465	SCREW / LK WASHER	4
		MS39062-1	CIRCUIT BREAKER	1
		MS35225-47	SCREW	2
		MS35337-23	LK WASHER	2
		MS35649-82	NUT	2
AN	FIG. 49	10951609	LEAD ASSY.	1 W/
		7982404	CONNECTOR	1
		8338561	SHELL	1
		7982907	PLUG	1
AN-I	FIG. 49-1	12257377	LEAD ASSY.	1 W/
		MS21333-126	CLAMP	1
		MS90728-57	SCREW	1
		MS35338-46	LK WASHER	1
		MS27183-14	WASHER	1
		10951611	LEAD ASSY.	1
		10951612	LEAD ASSY.	1
		MS28762-6-0740	HOSE	1
		MS21333-126	CLAMP	4
		7014010	GASKET	4
		12257745	GUARD	1
		MS35206-280	SCREW	2
		12257379	BRACKET	1
		12257381	TUBE ASSY.	1
		MS28778-6	PACKING	2
		546868	GASKET	4
		7335557	SEAL ASSY.	1
		7335558	SEAL ASSY.	1
		7324411	SEAL ASSY.	2
		10884217	GASKET	1
		7699926	GASKET	2
		501236	GASKET	1
		546861	GASKET	1
		10884301	PLATE, NAME	1
		TM9-2590-209-14	TECHNICAL MANUAL (JULY 1977)	1

FIG. 22J

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

BOX 4


ITEM	FIG.	PART NO.	PART NAME	QTY.
AO	FIG. 50	10887468	LEVER CONTROL ASSY.	1 W/
		MS35291-60	SCREW	1
		MS35337-27	LK WASHER	3
		MS15795-215	WASHER	1
		10887487	INDICATOR	1
		MS35291-34	SCREW	3
		10887445	BRACKET ASSY.	1
		10887444	SHAFT	1
		124543	KEY	2
		10884185	ARM	2
		MS15795-214	WASHER	2
		MS35690-628	NUT	2
		10887740	ROD ASSY.	1
		MS35691-622	NUT	2
		MS35337-26	LK WASHER	3
		MS35690-502	NUT	3

BOX 5

10893561	TEMPLATE	1
10934359	ADAPTER	2
10952231	ANCHOR	4


FIG. 22K

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

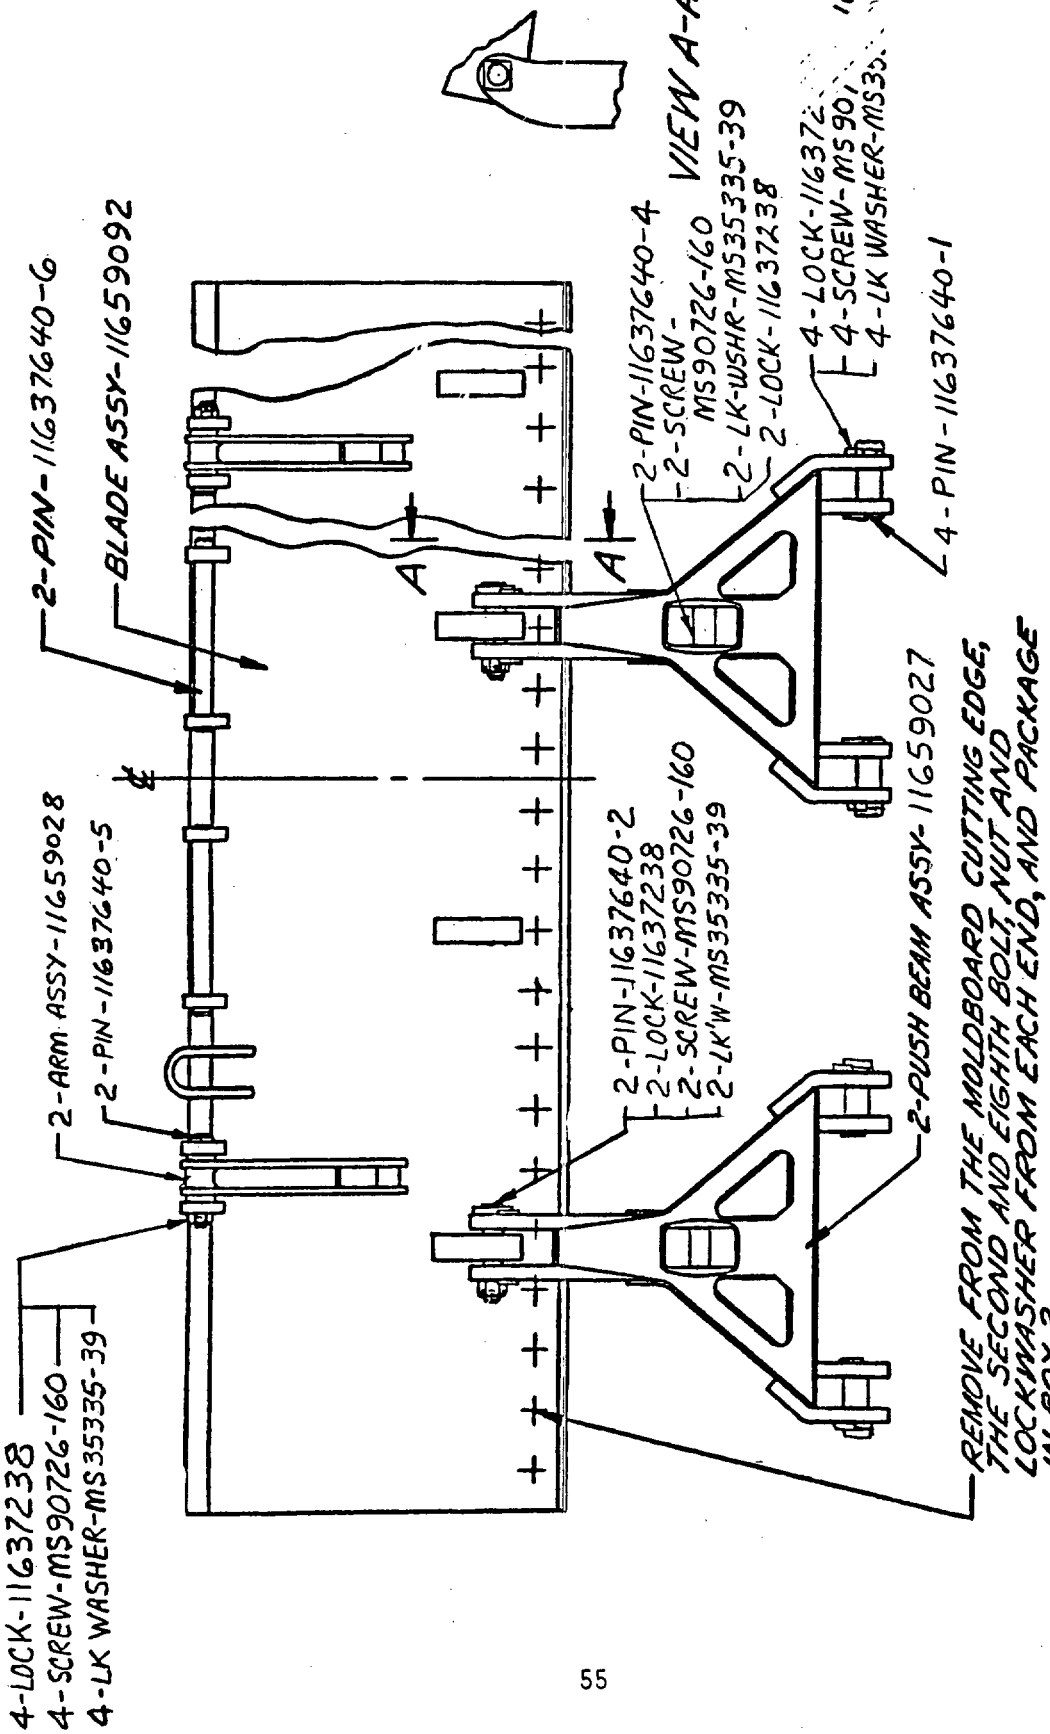

ITEM A
FIG. 23

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

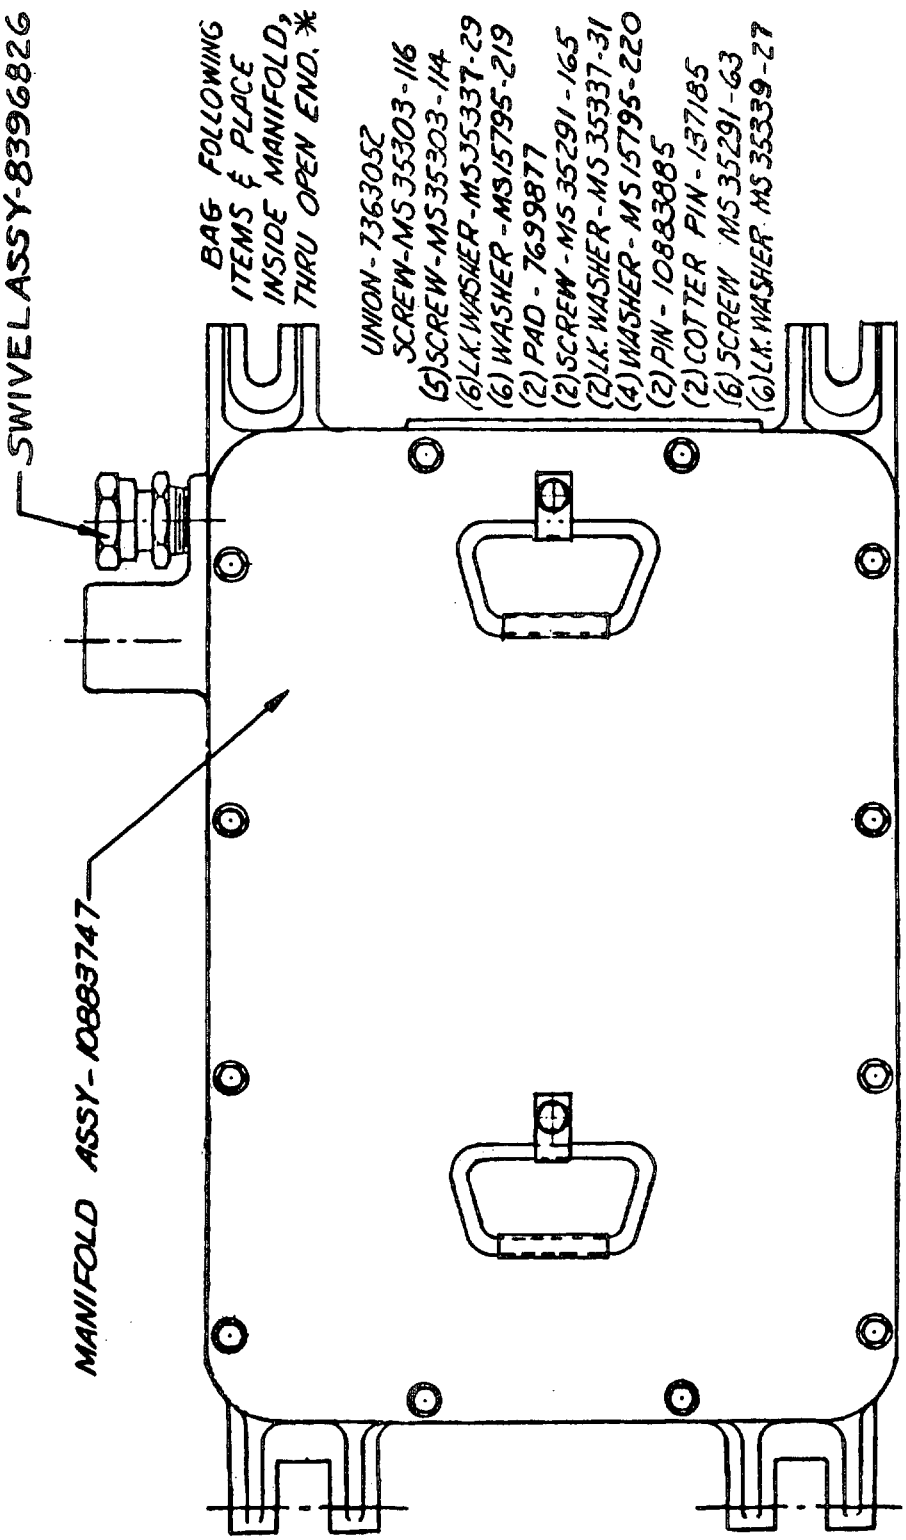

* APPLY P-2 TO ALL UNPAINTED METAL SURFACES & PACKAGE METHOD 1C-1

ITEM B
FIG 24

* ITEM RESTORED 7-29-77 SWO

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEM C

NOT COVERED BY FIGURE TYPE DRAWING
SEE PACKING LIST

FIG. 25

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.


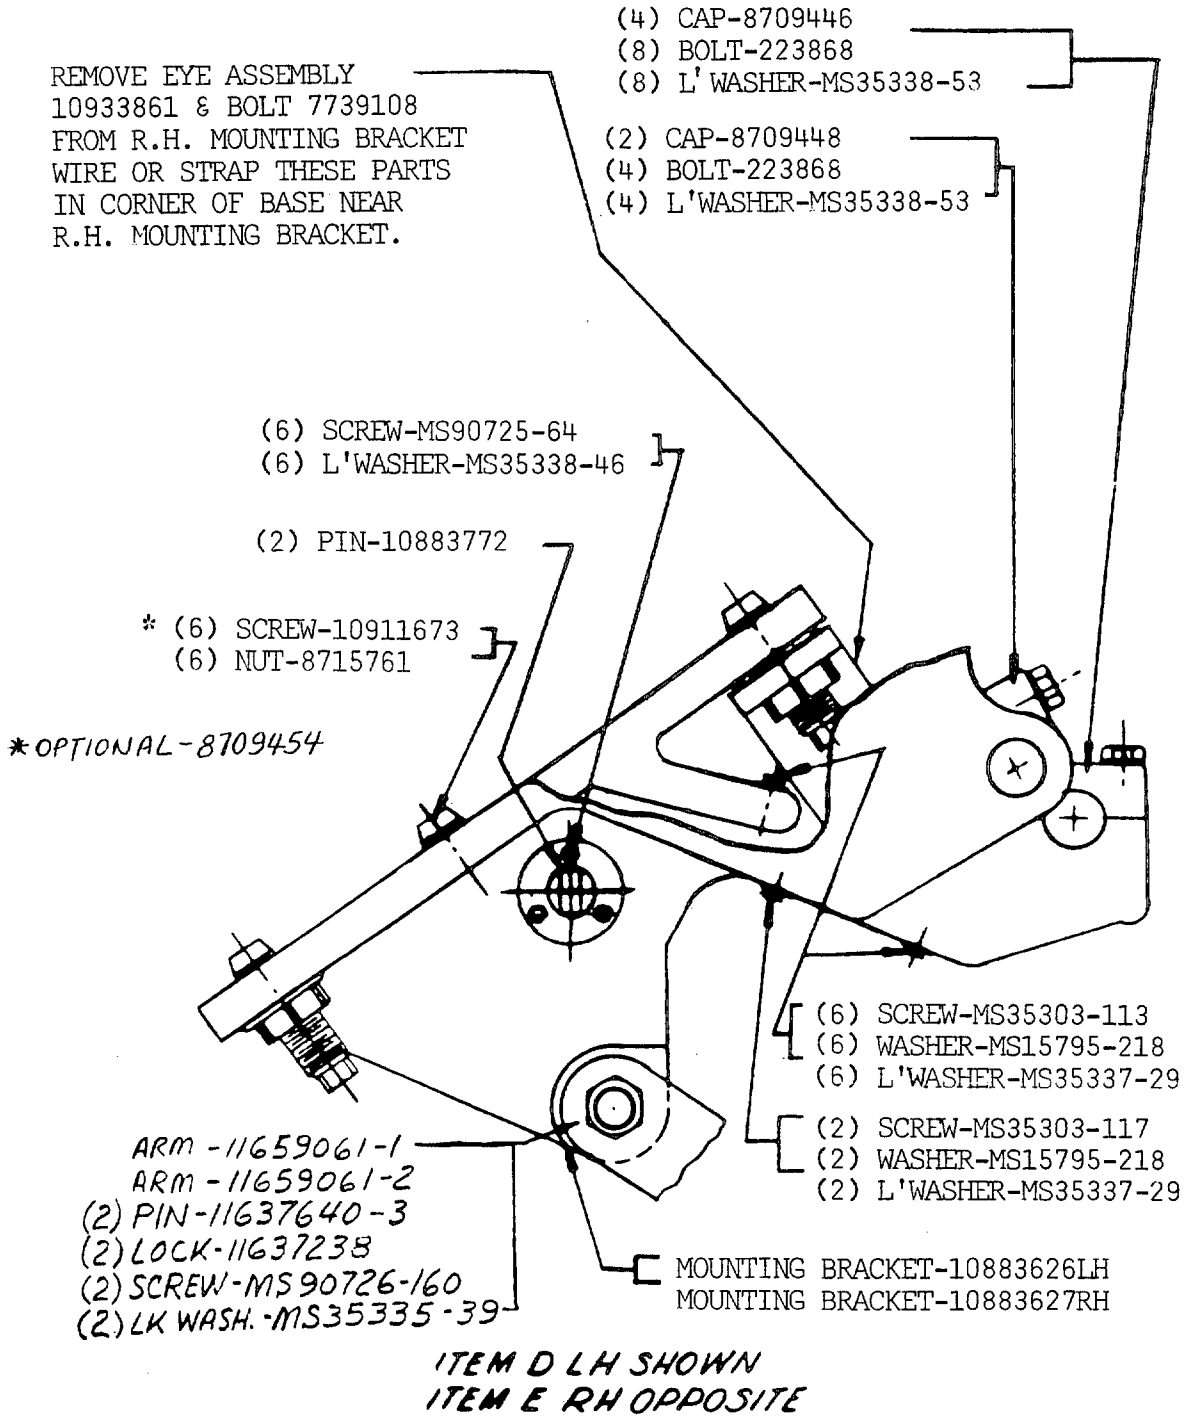



FIGURE 26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

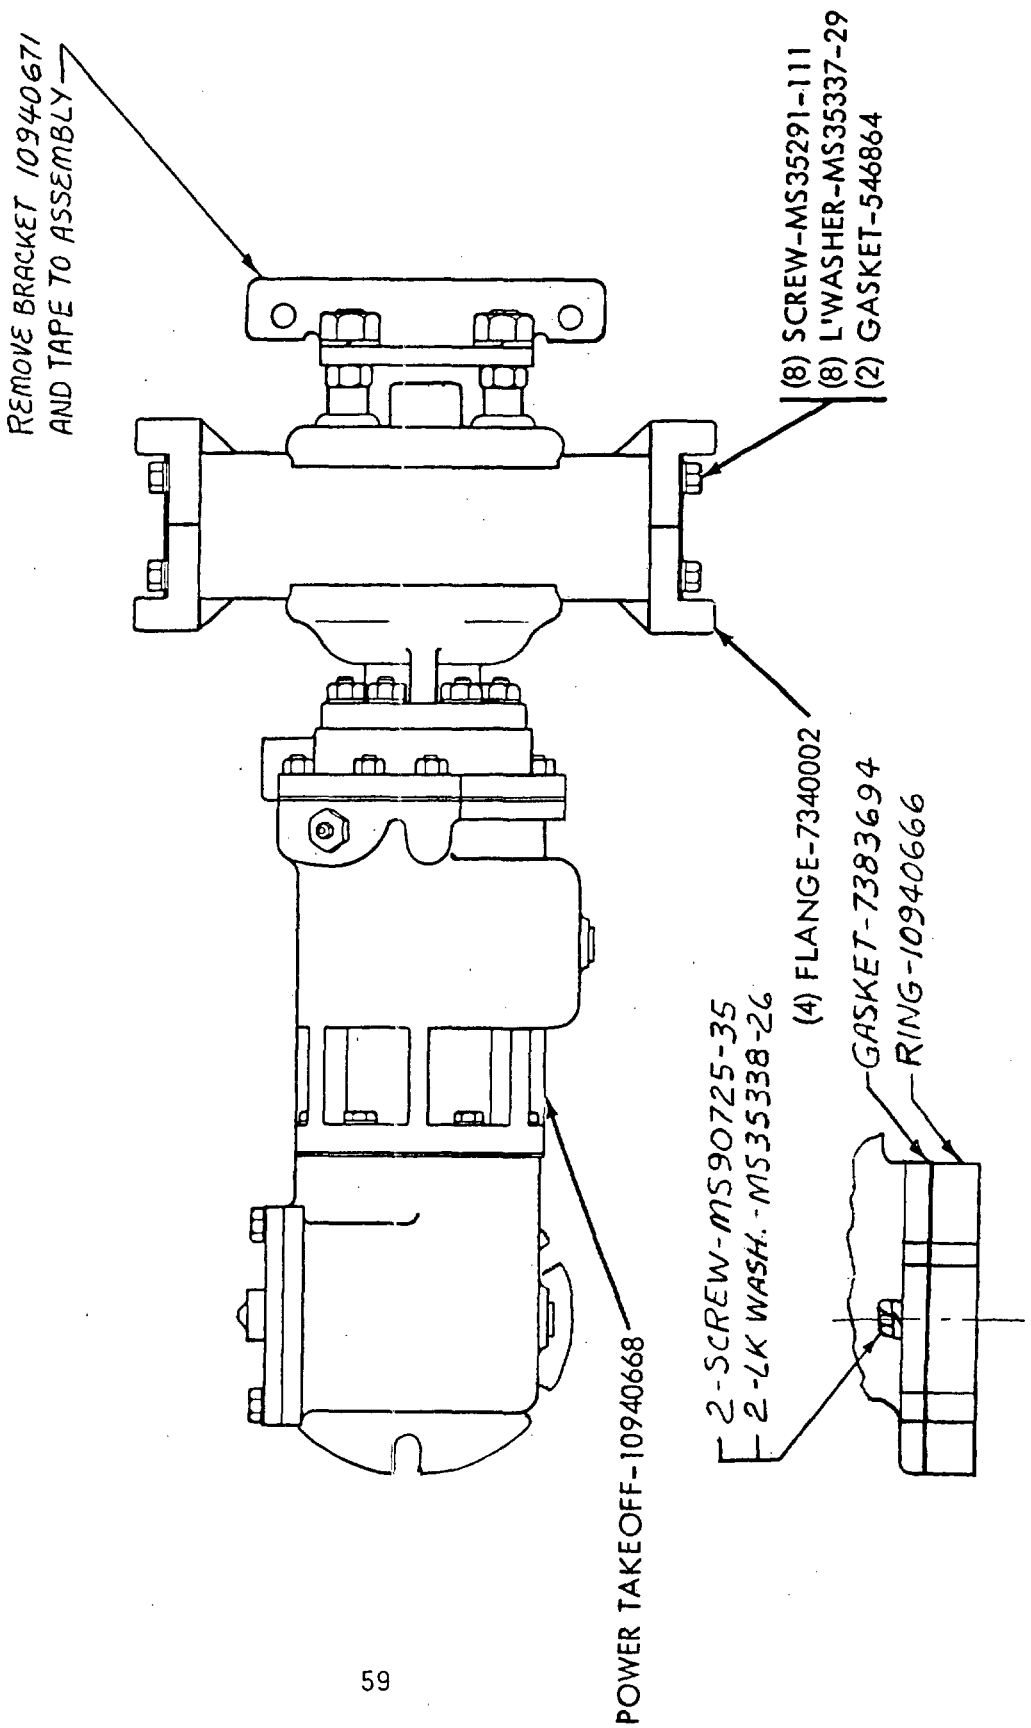


ITEM F
FIG 27


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

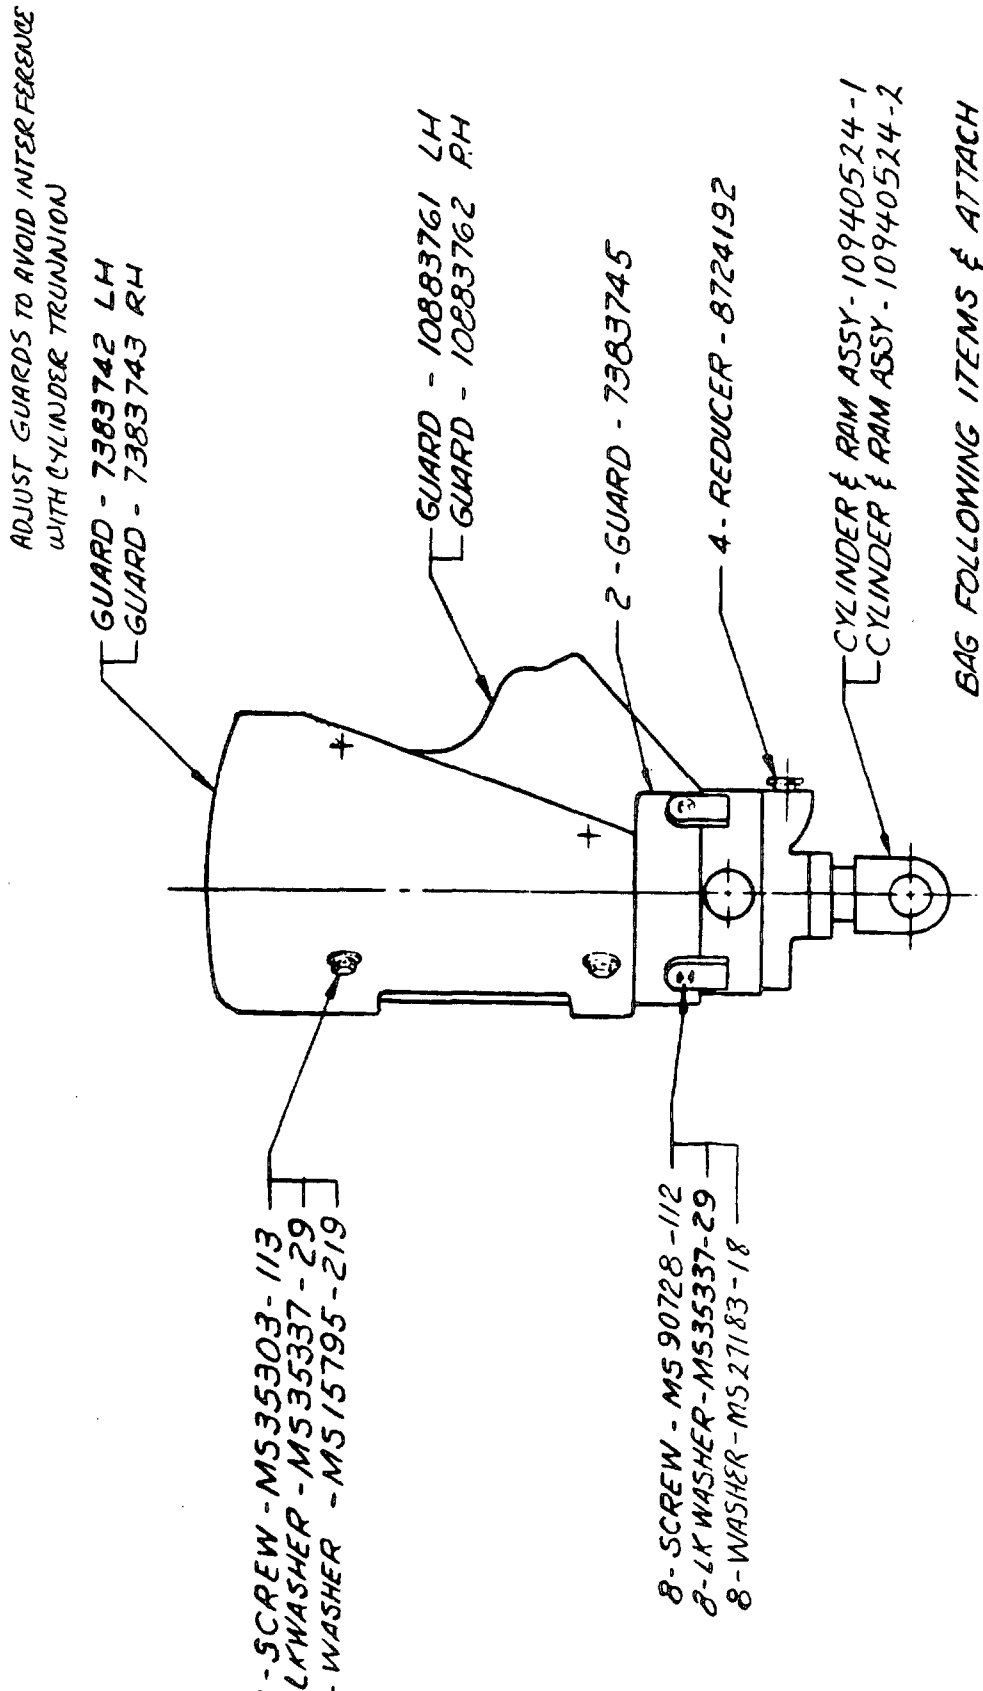

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

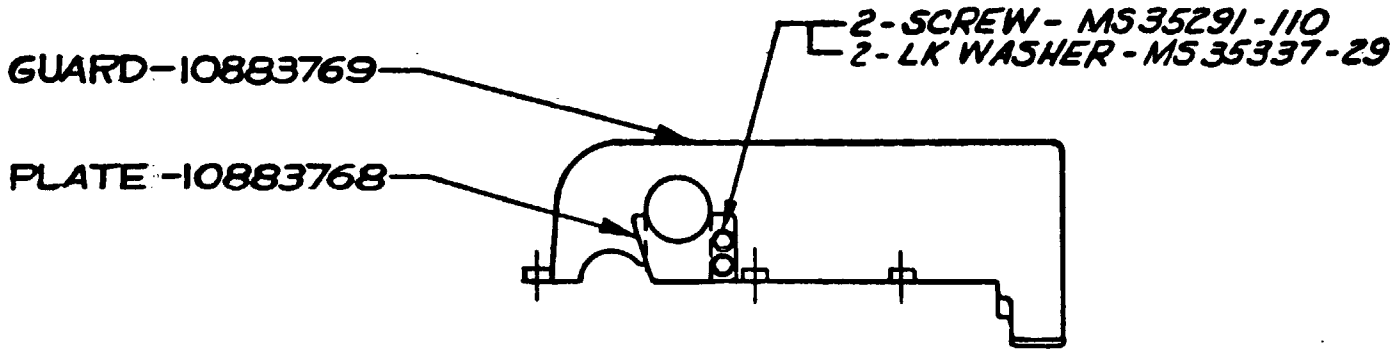


ITEM J

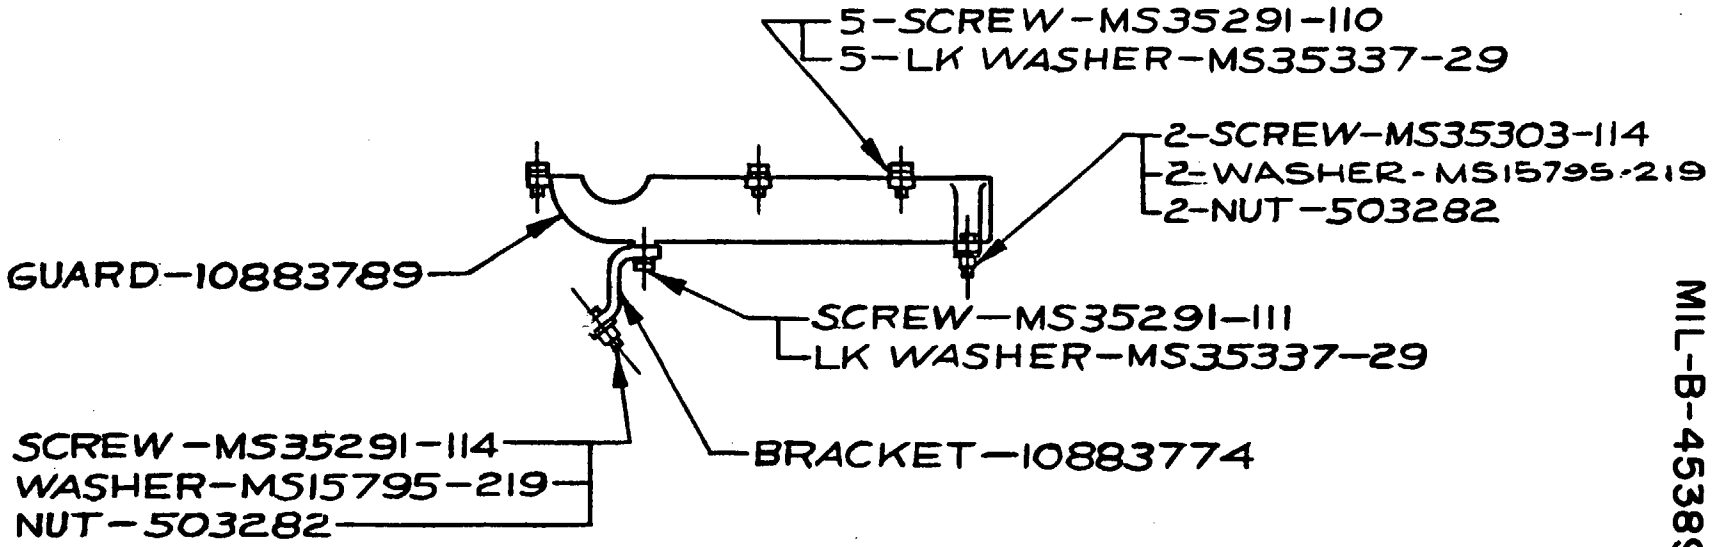


ITEM I
FIG 29

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

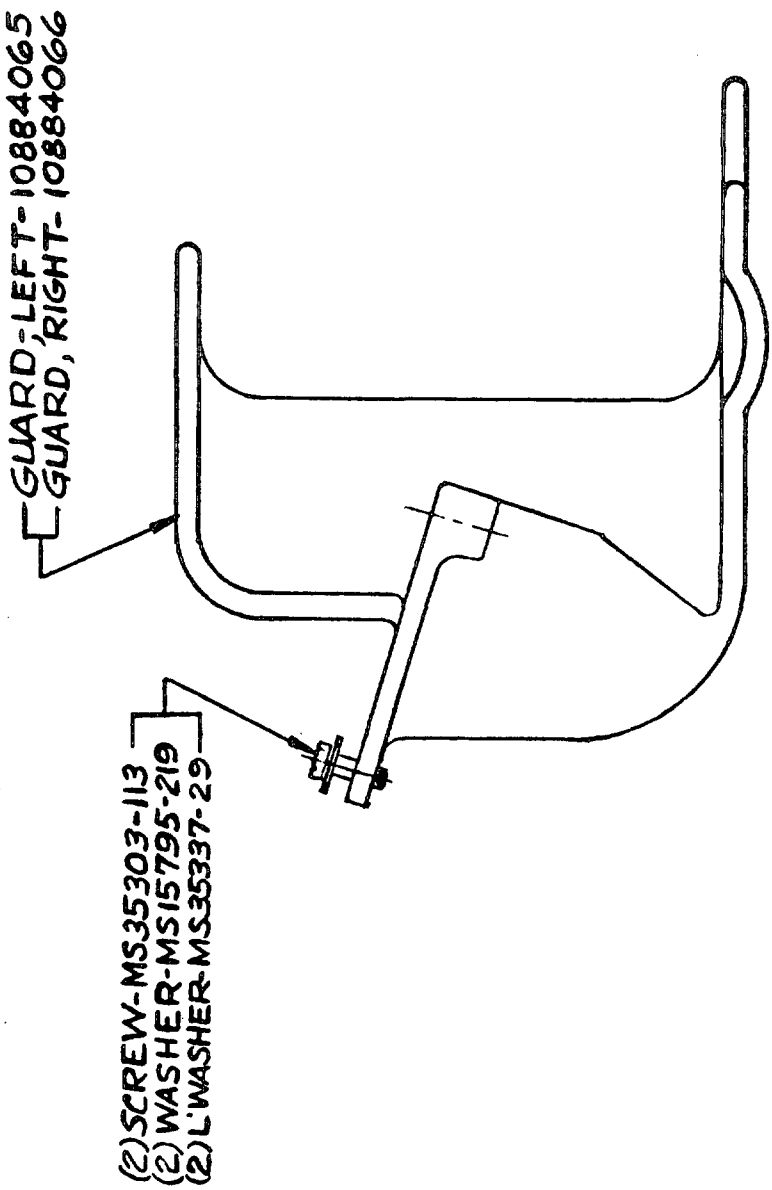


ITEM K LH SHOWN
ITEM L RH OPPOSITE
FIG. 30

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

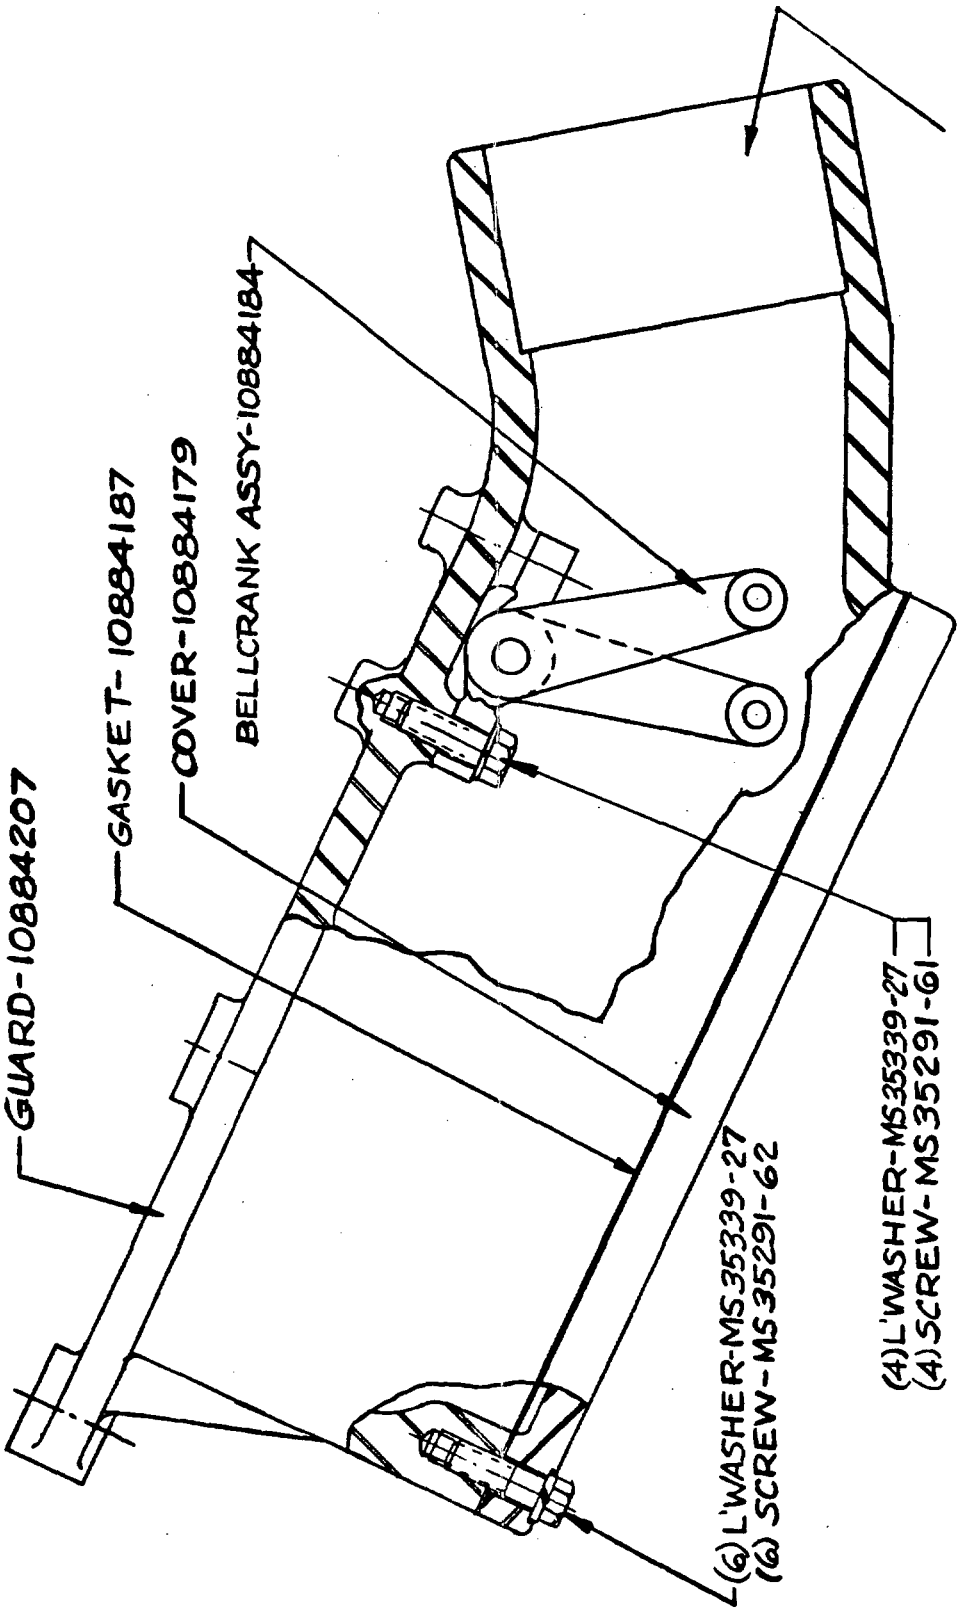

ITEM M
FIG 31


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

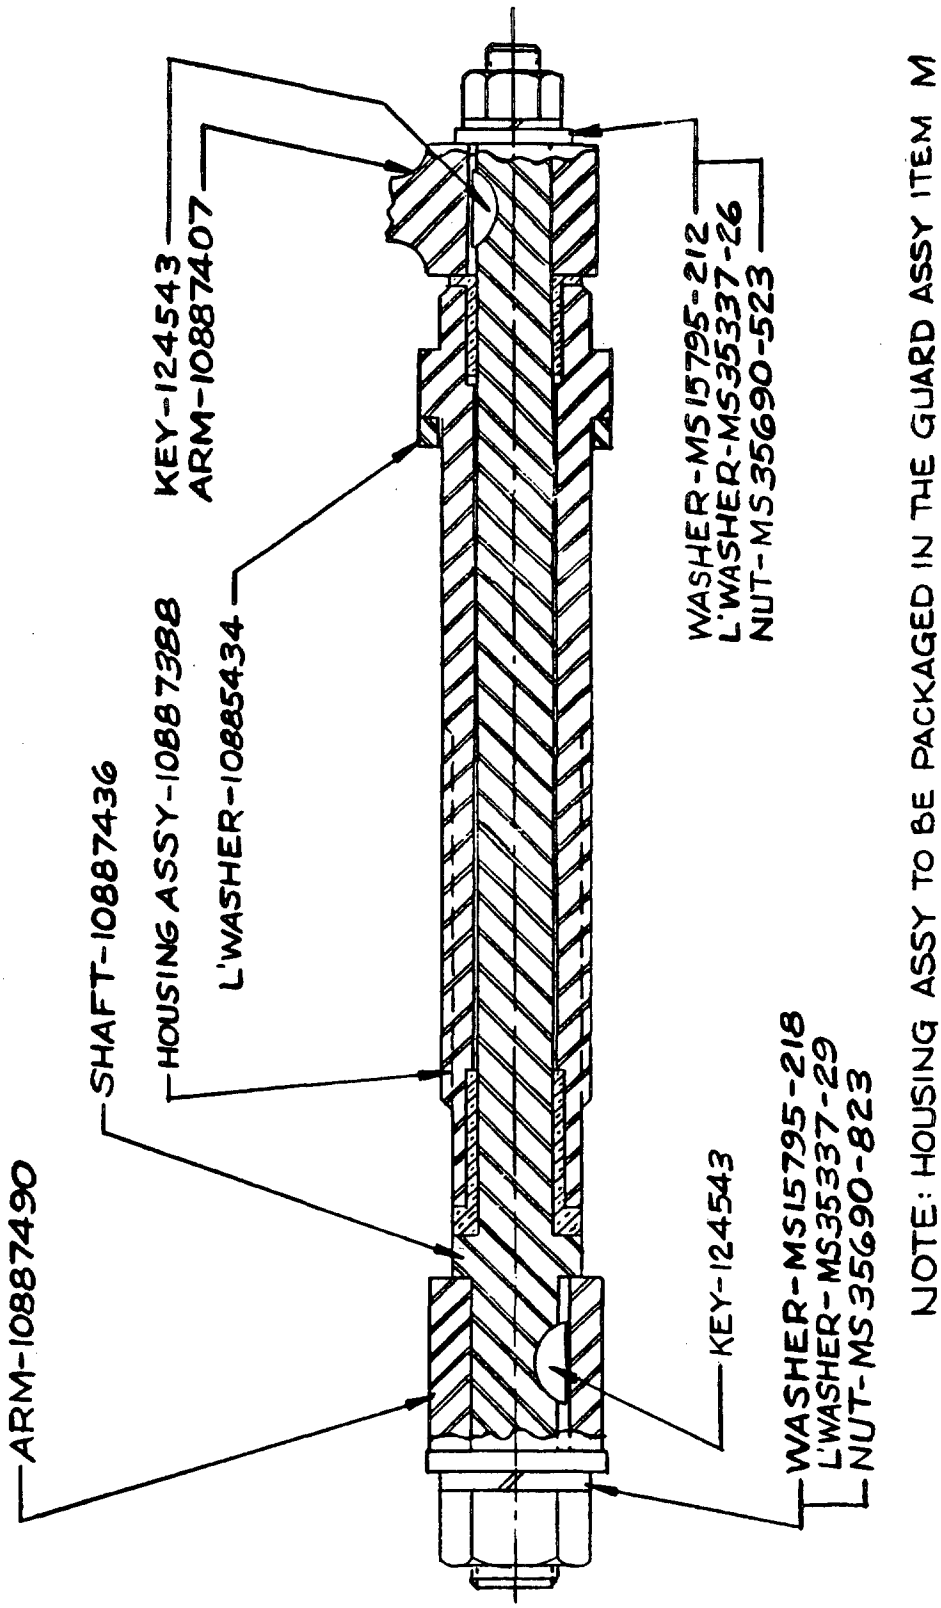

NOTE: HOUSING ASSY TO BE PACKAGED IN THE GUARD ASSY ITEM M

ITEM MI
FIG. 32

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

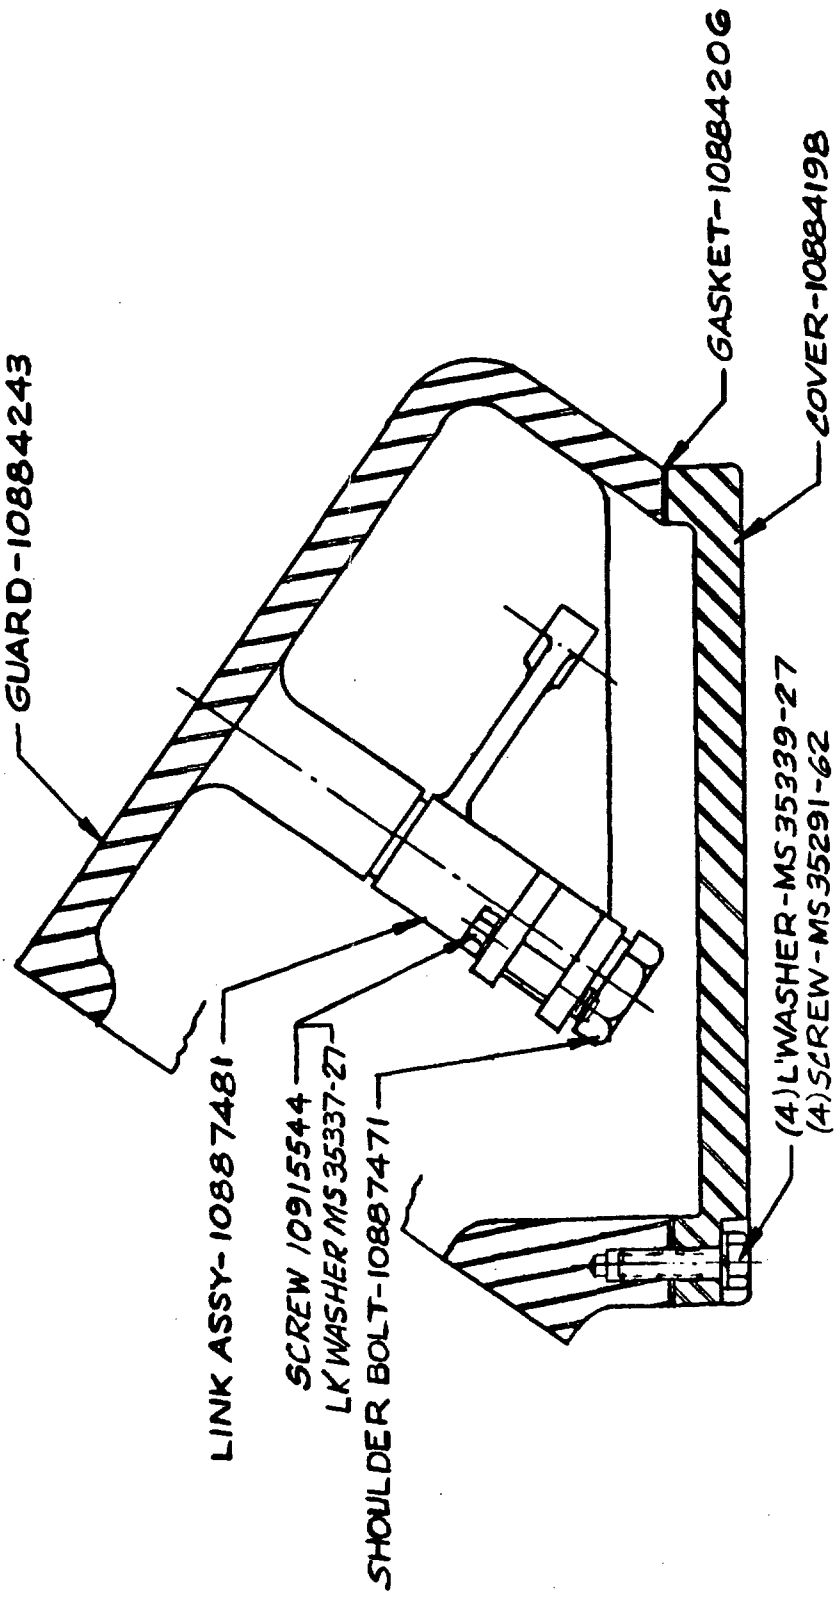

NOTE: DO NOT TIGHTEN SCREWS TO COMPRESS GASKET.

ITEM N
FIG 33


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

ITEMS O THRU X

NOT COVERED BY FIGURE TYPE DRAWING
SEE PACKING LIST


FIG. 34

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

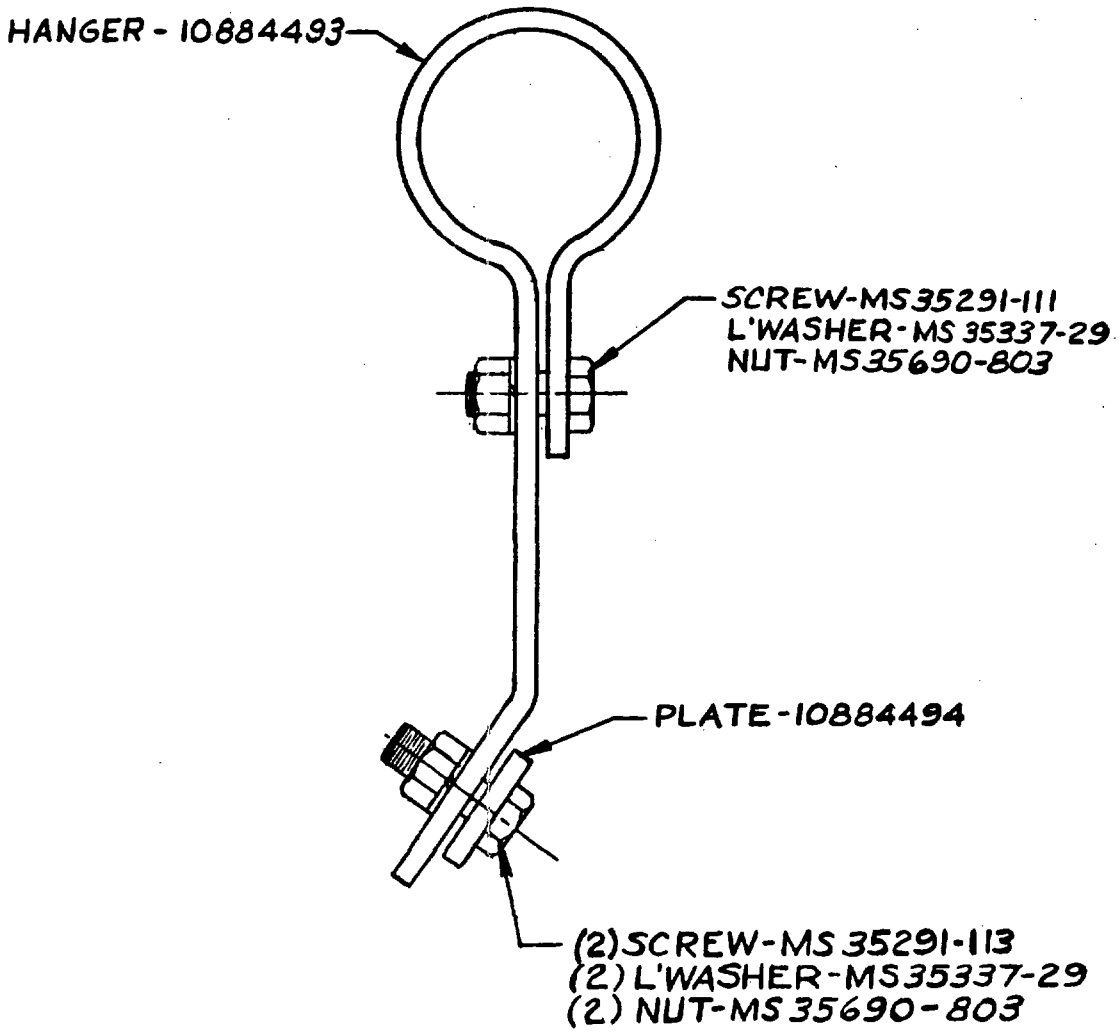


ITEM Y
FIG 35

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

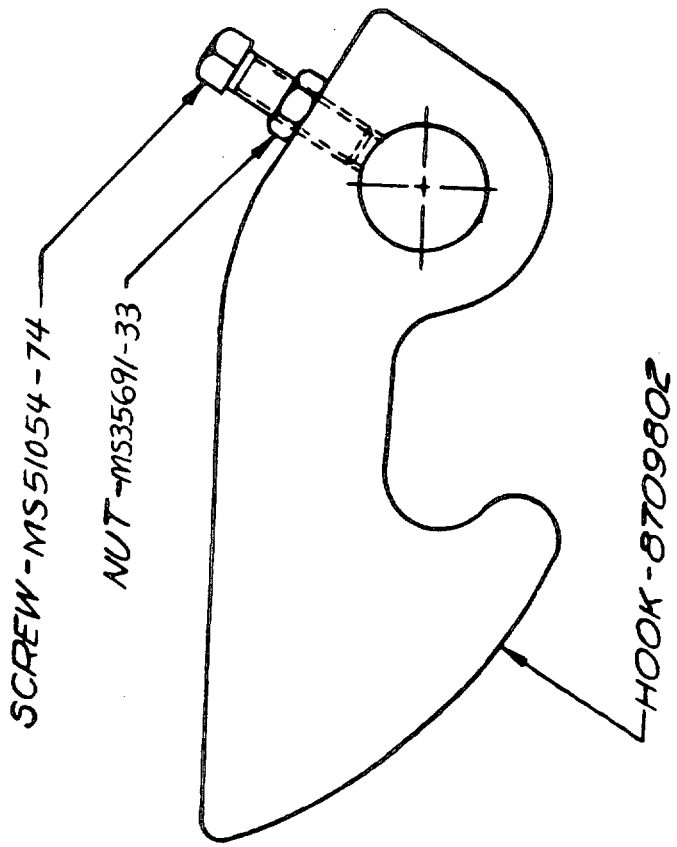


ITEM Z
FIG. 36

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

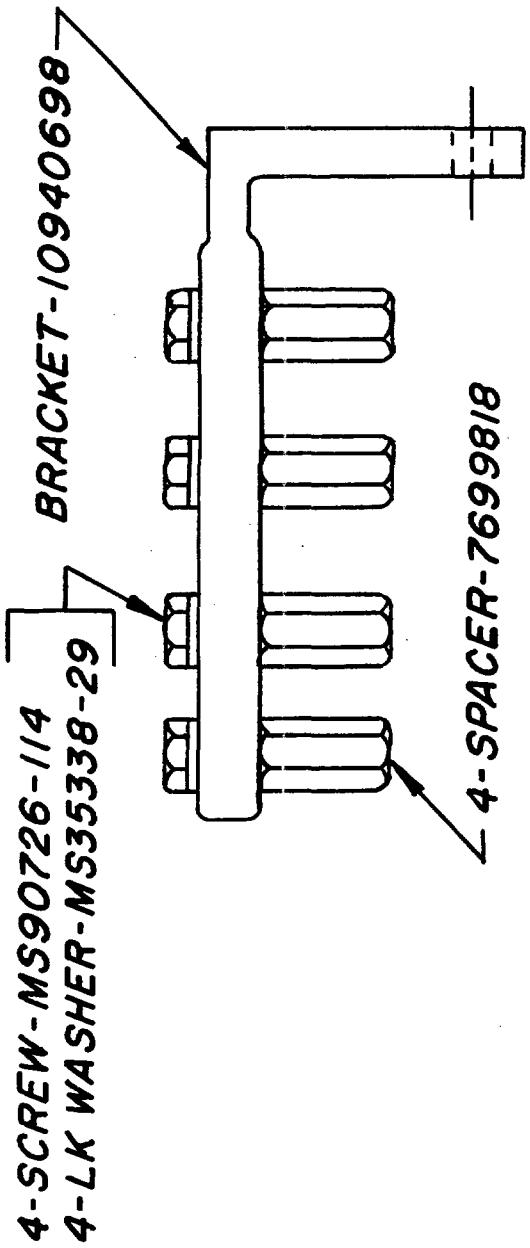


ITEM AA
FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

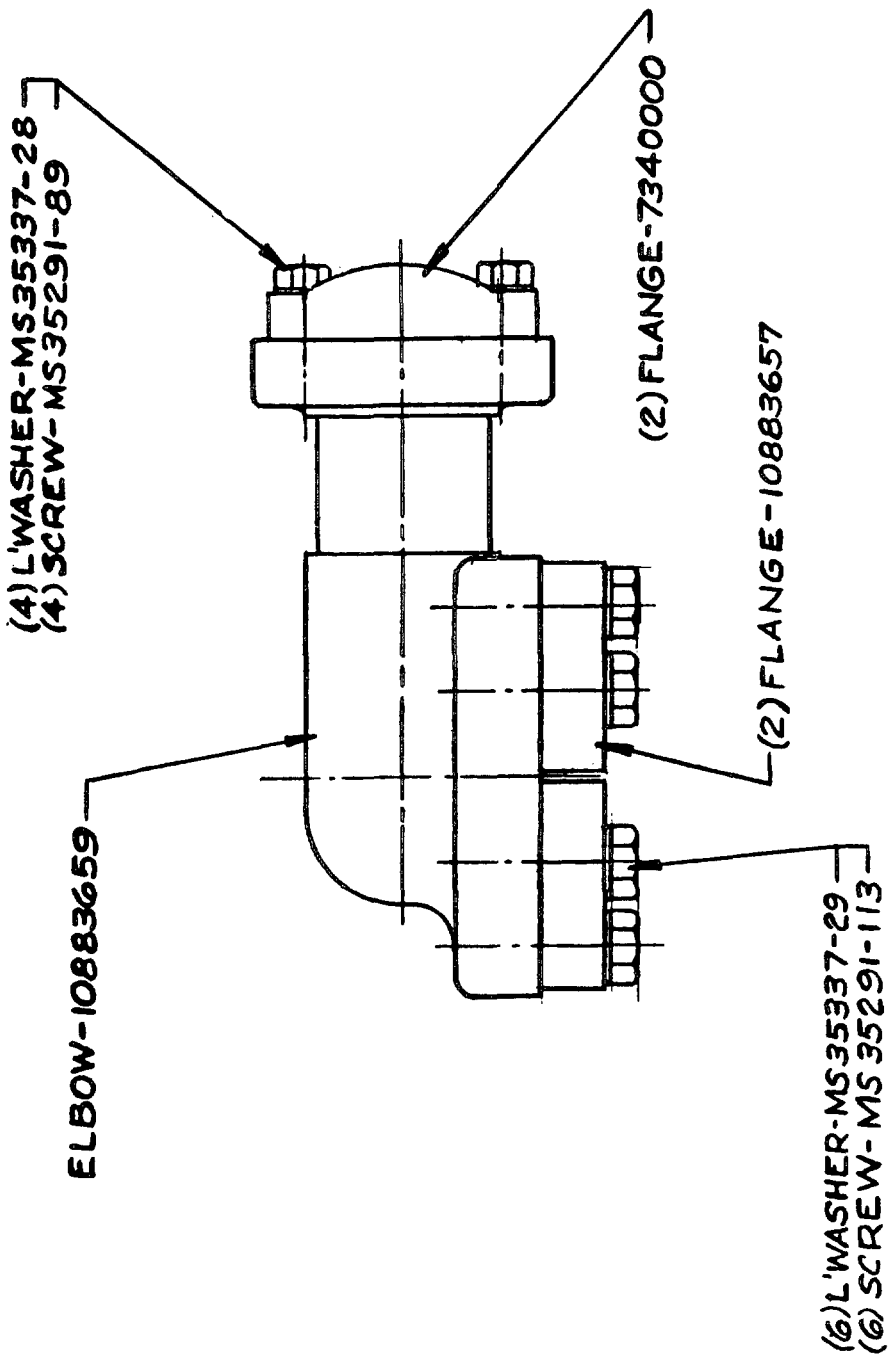


ITEM AB
FIG. 38

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

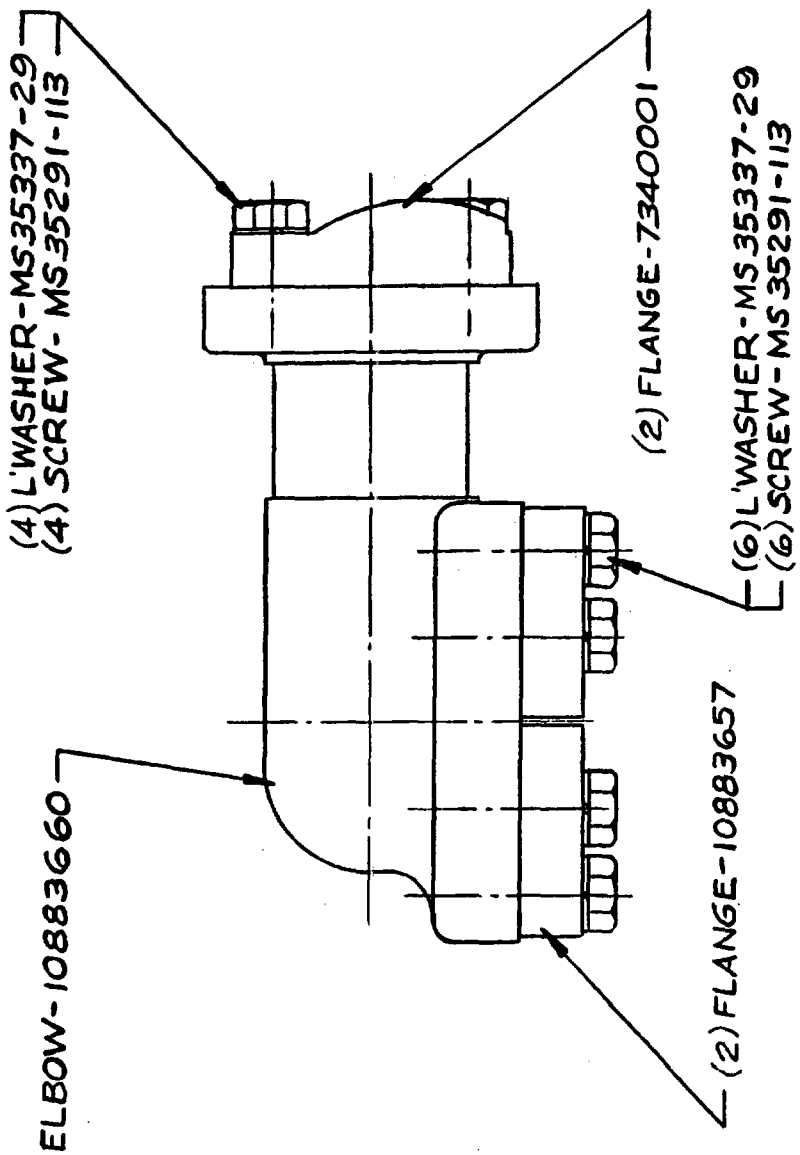


ITEM AC
FIG. 39

Source: https://assist.dla.mil - Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

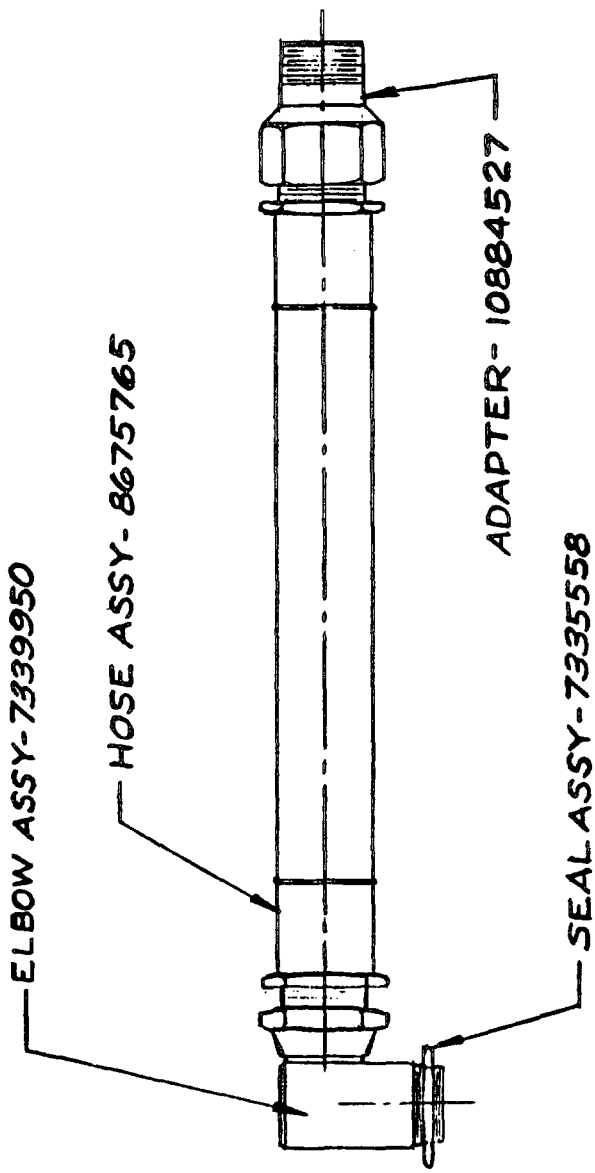


ITEM AD
FIG. 40

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

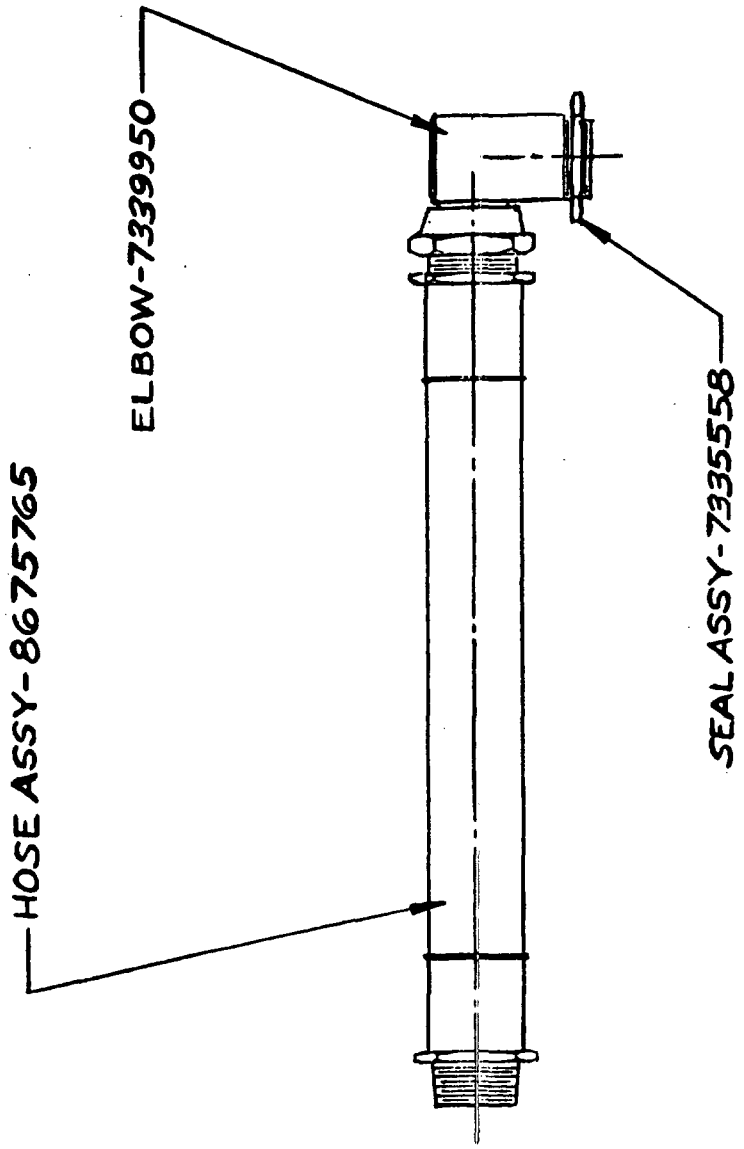


ITEM AE
FIG. 41

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

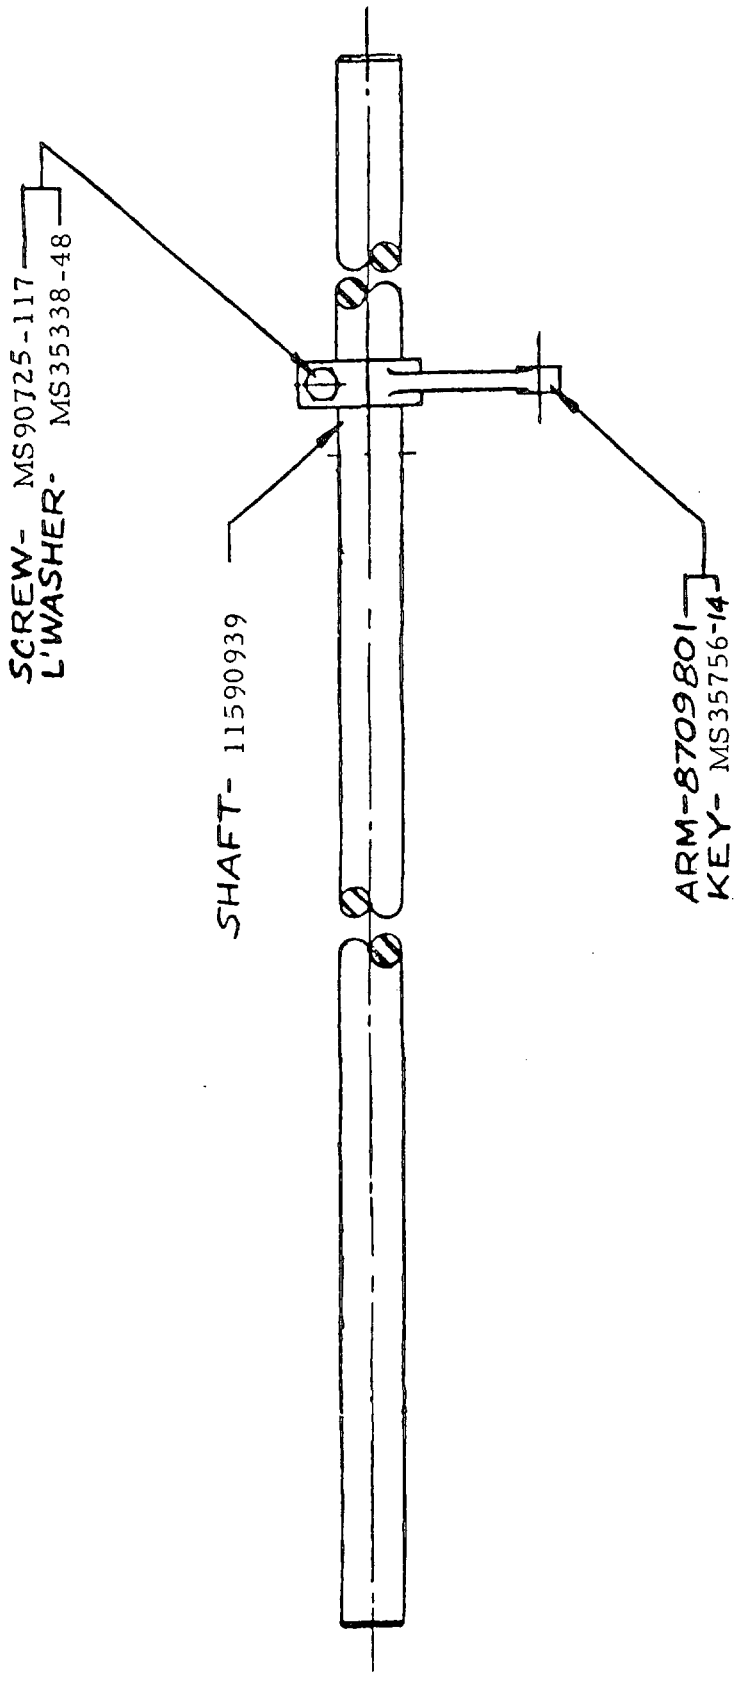


ITEM AF
FIG. 42

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

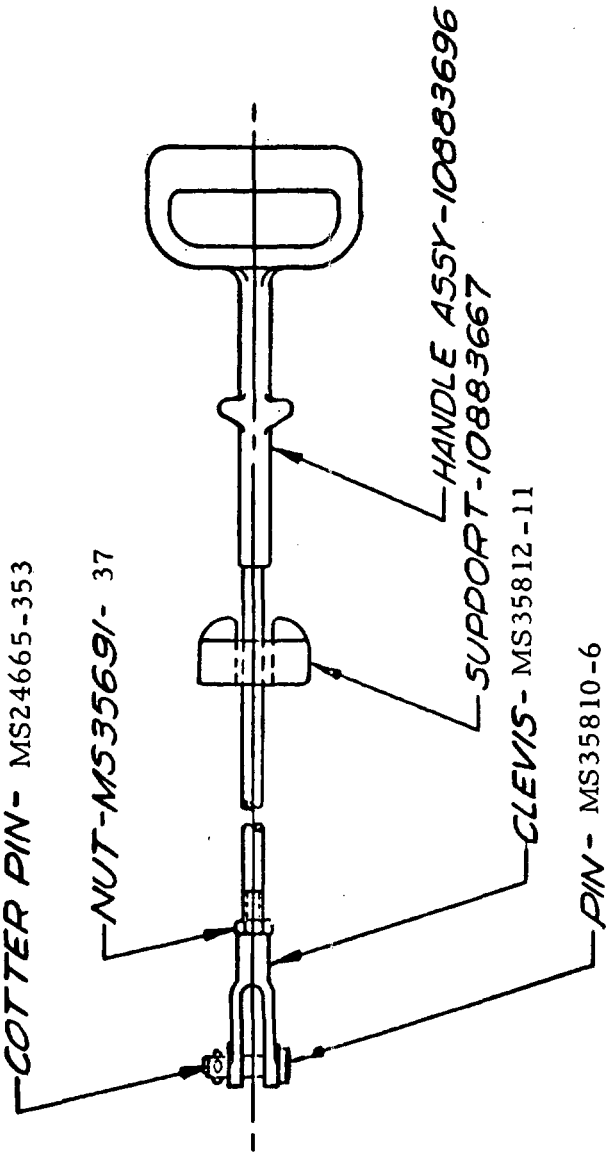


ITEM AG
FIG. 43

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

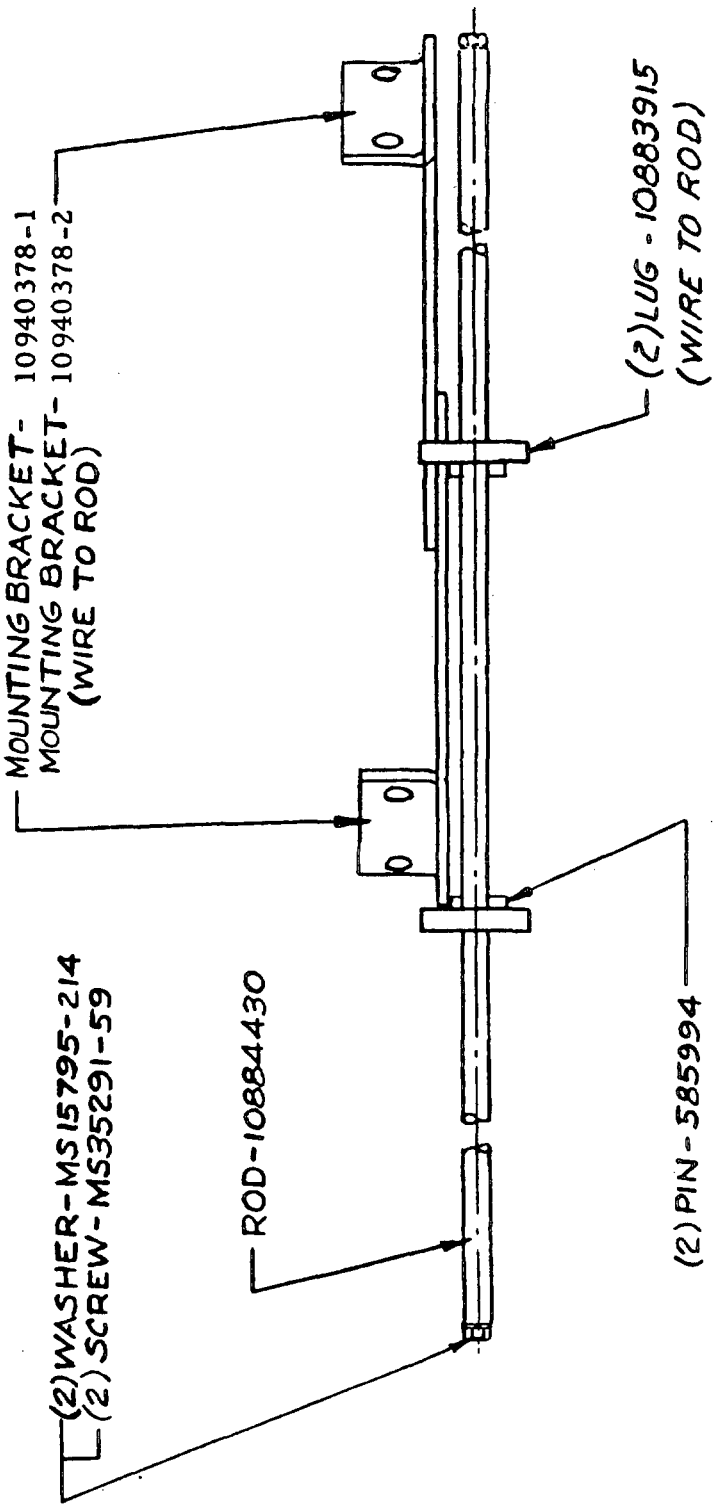


ITEM AH
FIG. 44

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

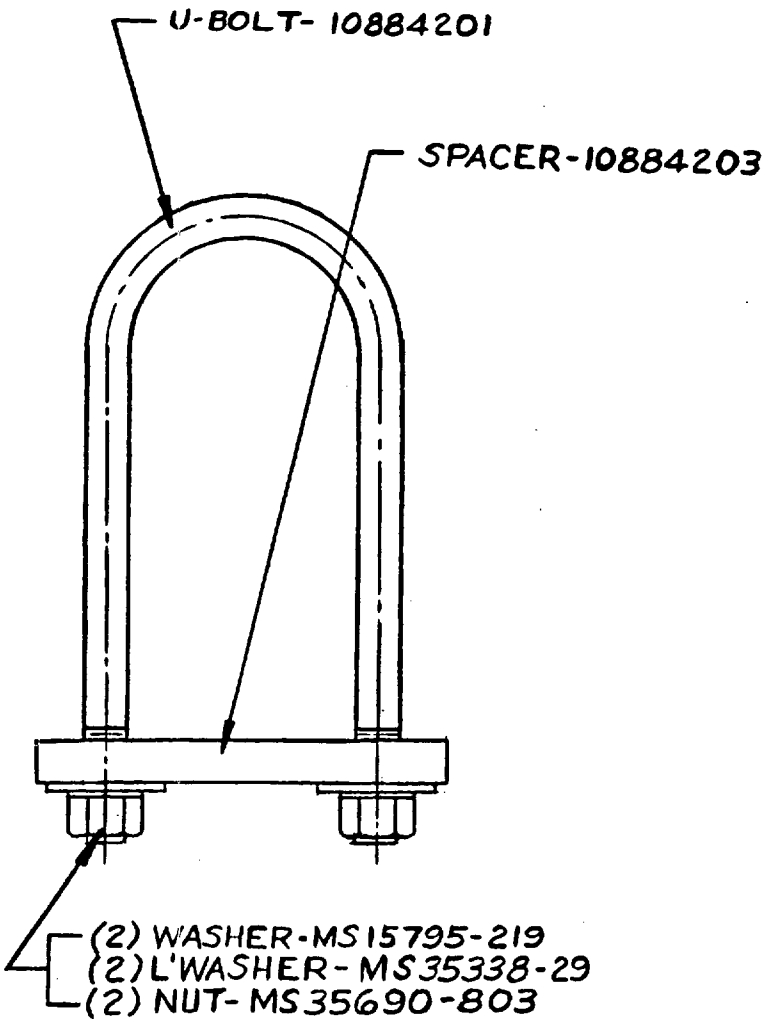

ITEM A1
FIG 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

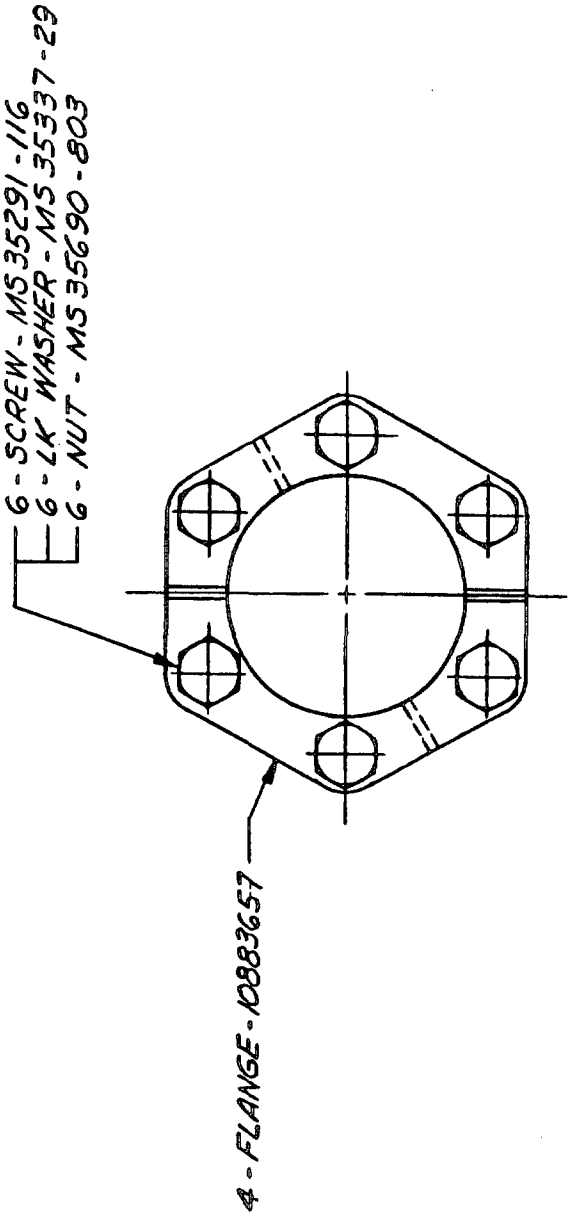

ITEM AJ
FIG. 46

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.


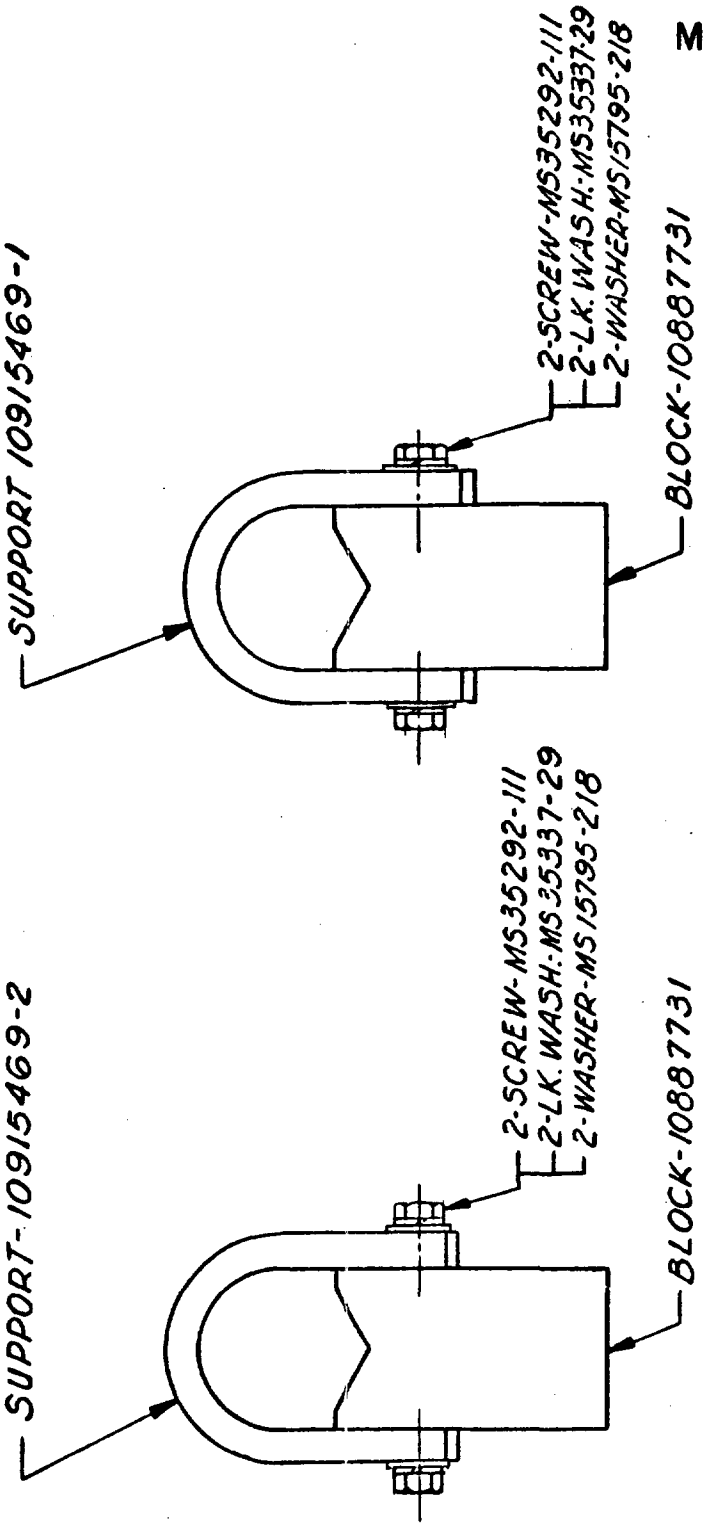



FIG. 47

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

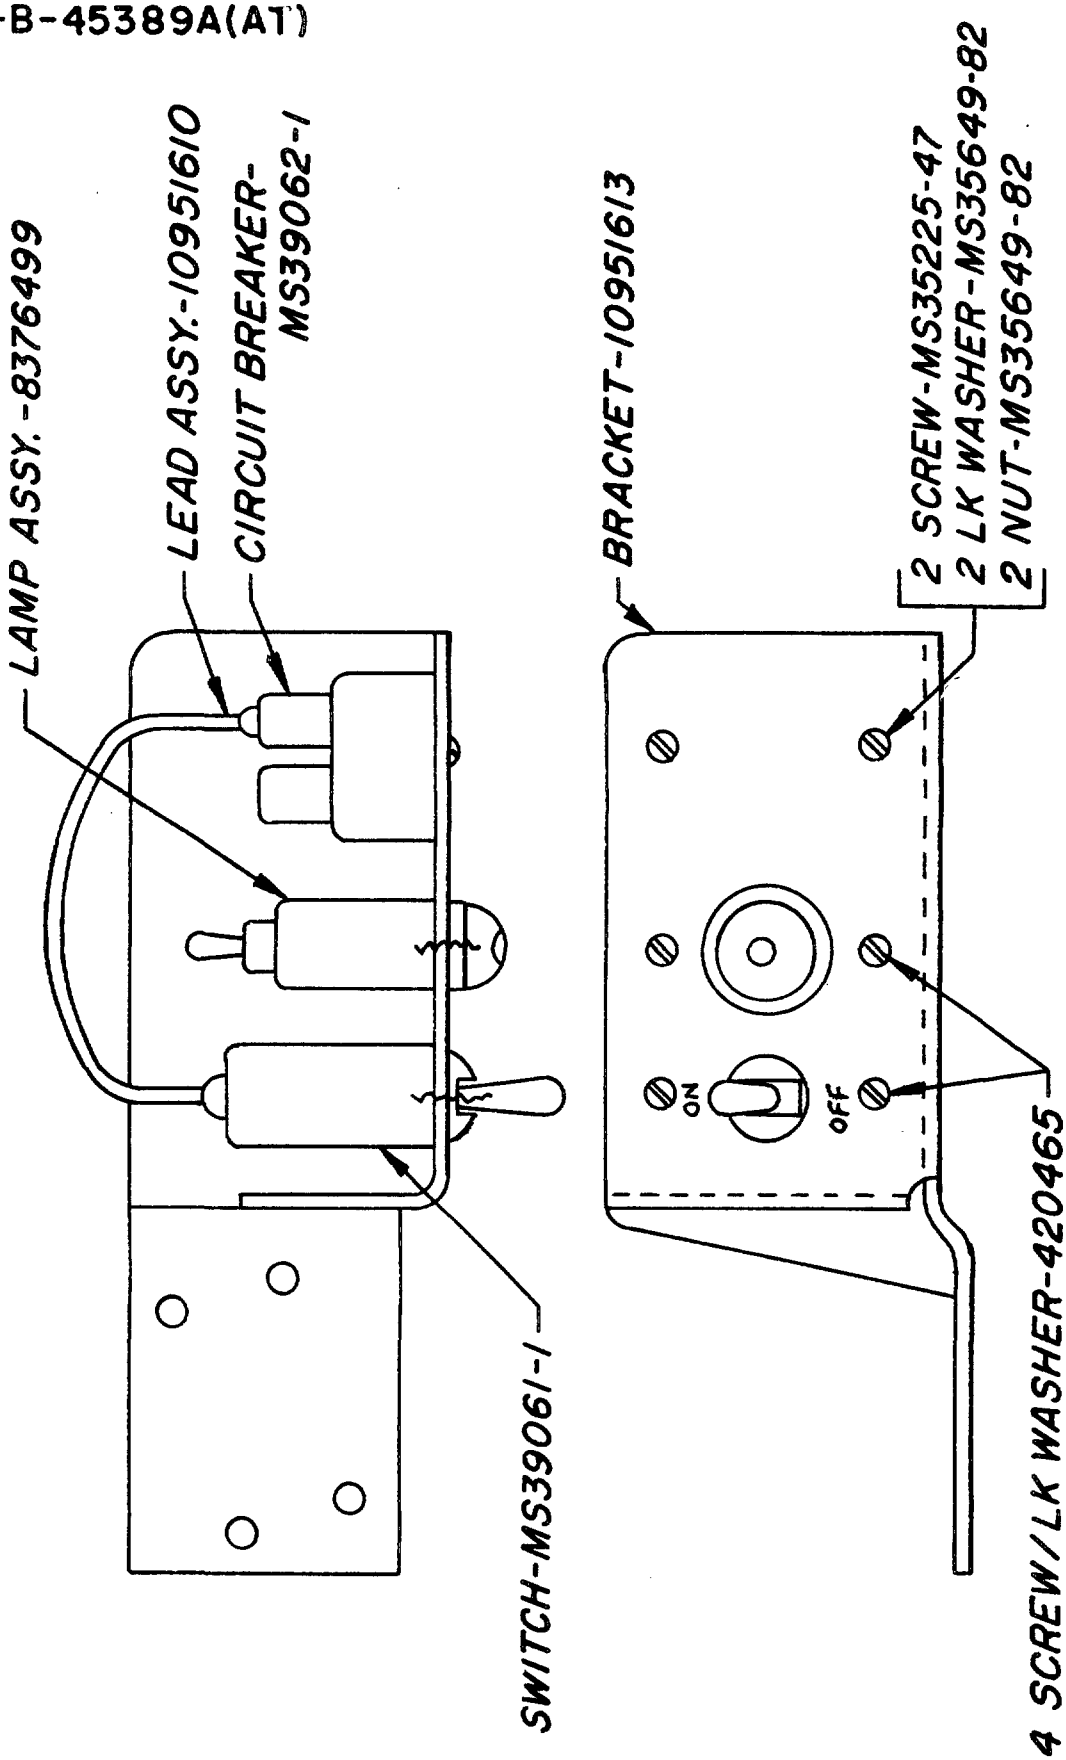


ITEM AM
FIG 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

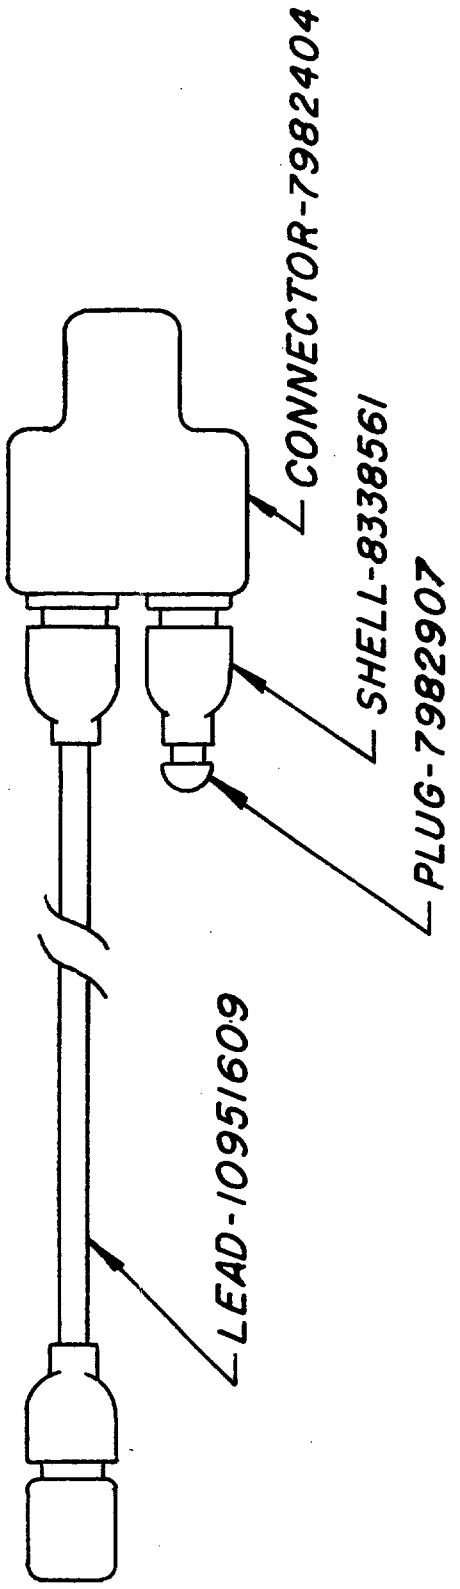


ITEM AN
FIG. 49

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

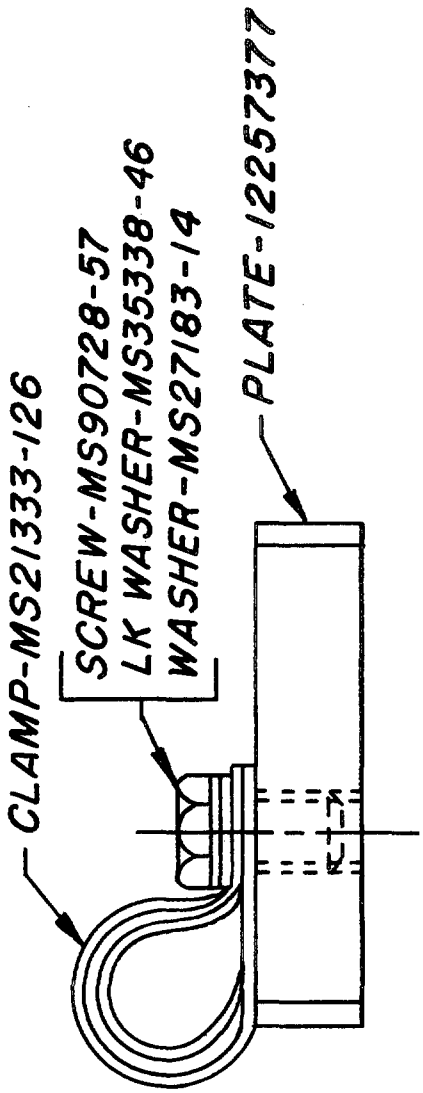


ITEM AN-1
FIG. 49-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

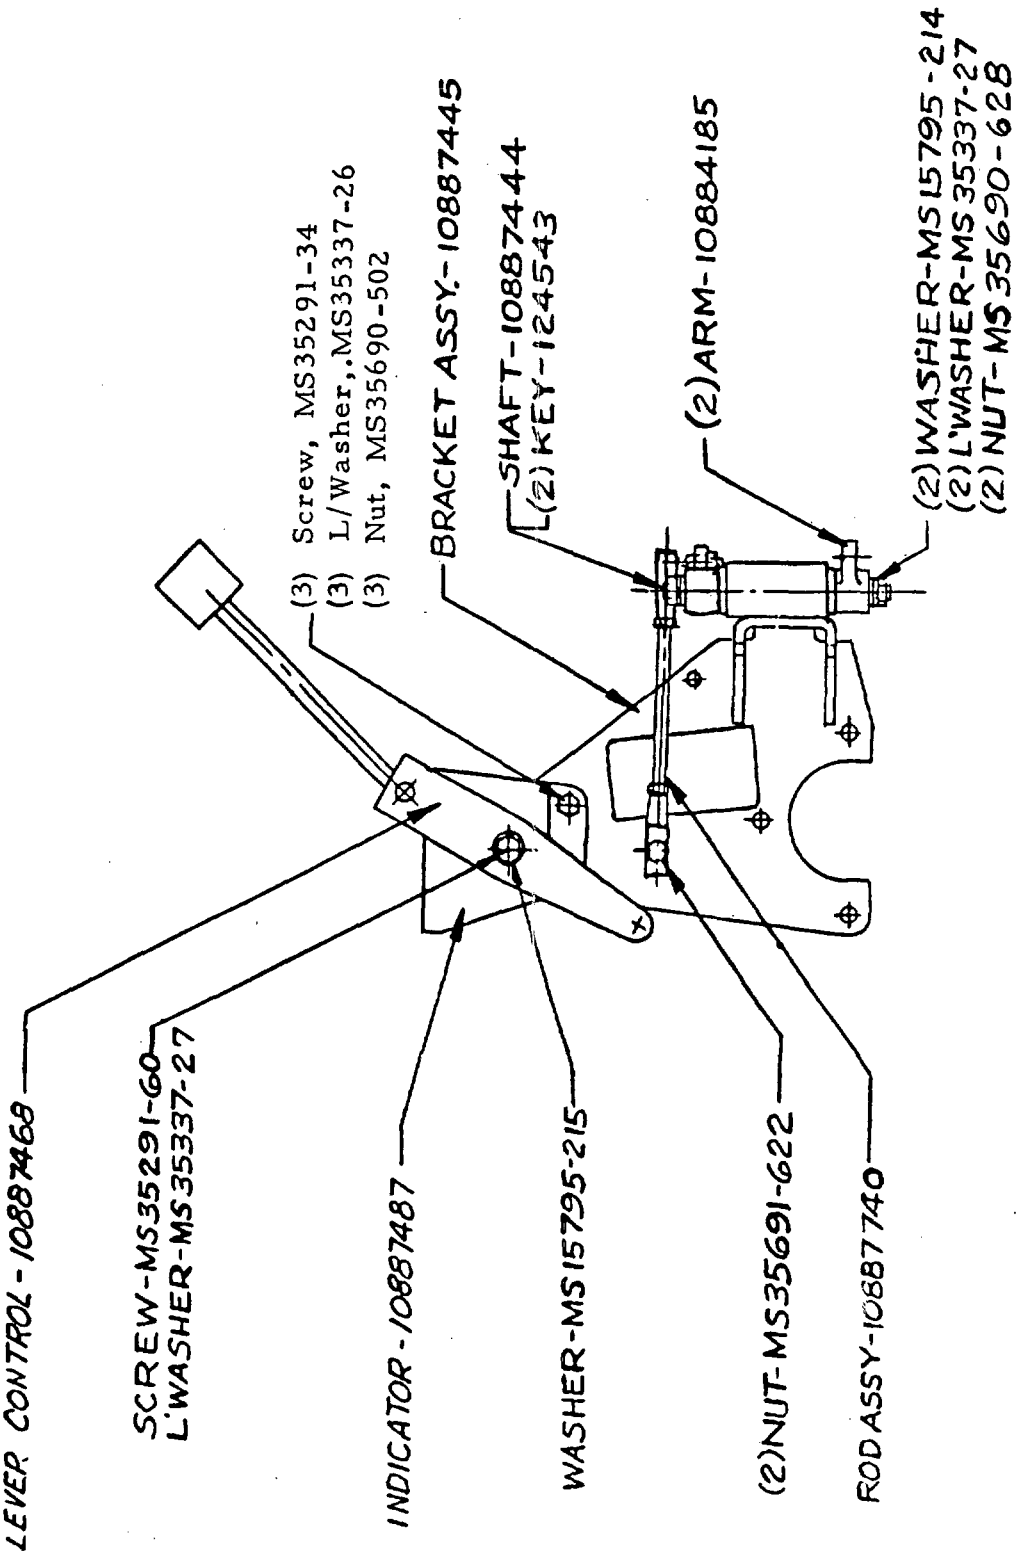

ITEM AO
FIG. 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

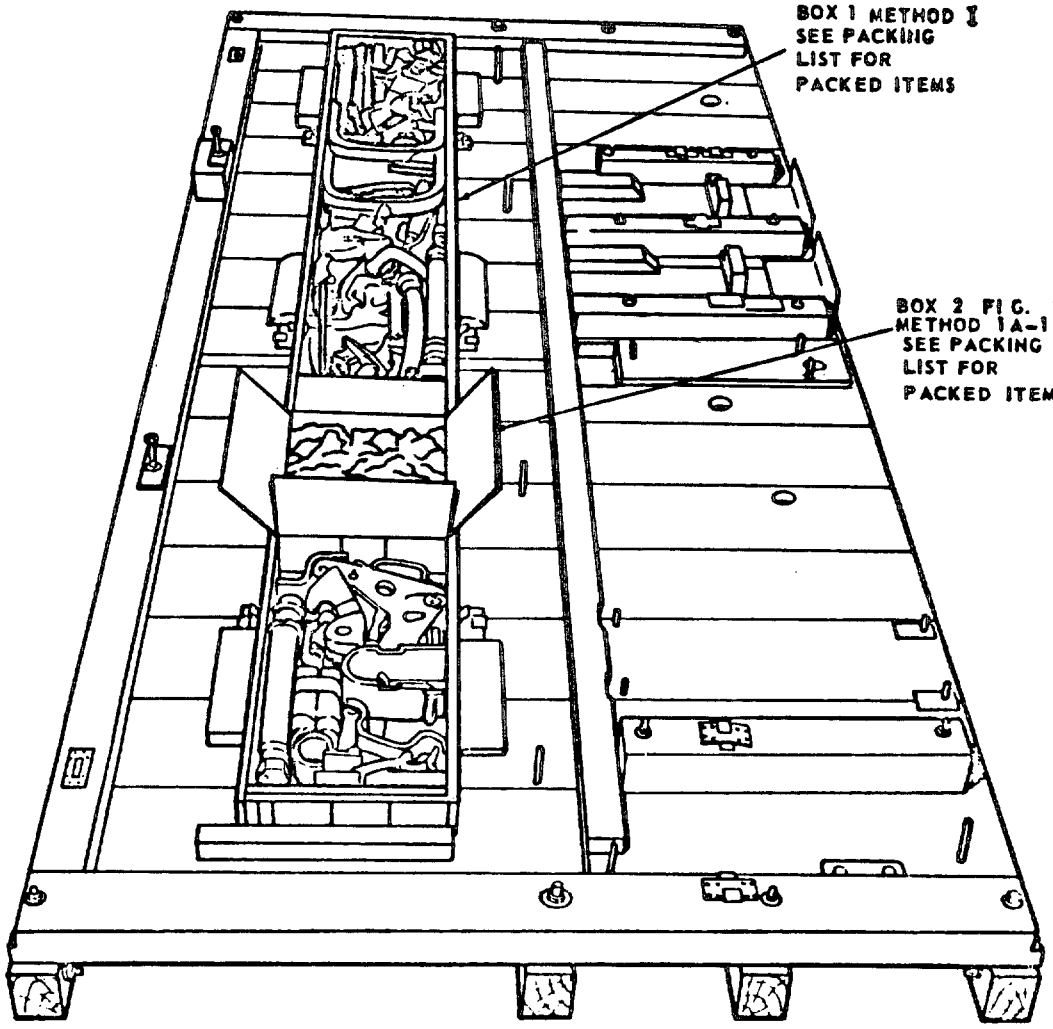

BOX 1 CONTAINS HOSE ASSEMBLIES, HYDRAULIC LINE CONNECTORS, BRACKETS, TRAVEL LOCK HOOKS, ARMOR TUBING, ETC.
BOX 2 CONTAINS SCREWS, WASHERS, GASKETS, ETC.
SMALL ITEMS ARE PLACED IN THE FIBER BOARD CONTAINER SO THAT THEY WILL NOT BE LOST THROUGH CREVASSES OF THE CRATE FLOOR.

BOX 1 AND 2 IS SEALED WITH COVER.

FIG. 51 PACKING OF PARTS UNDER MOLDBOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.


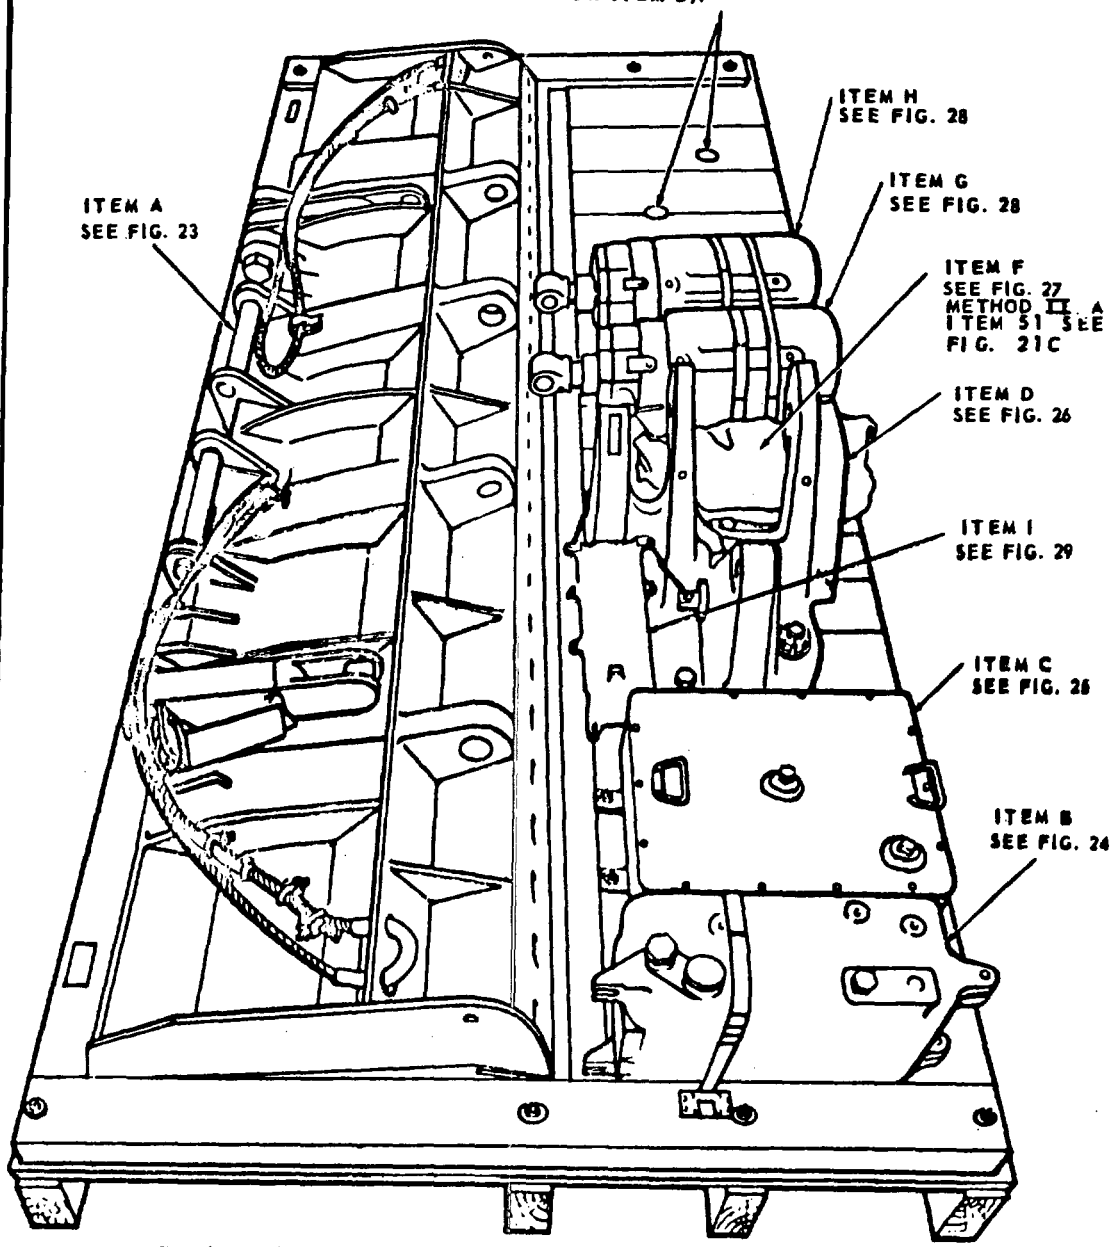


FIG. 32 FIRST LAYER OF PACKED ITEMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

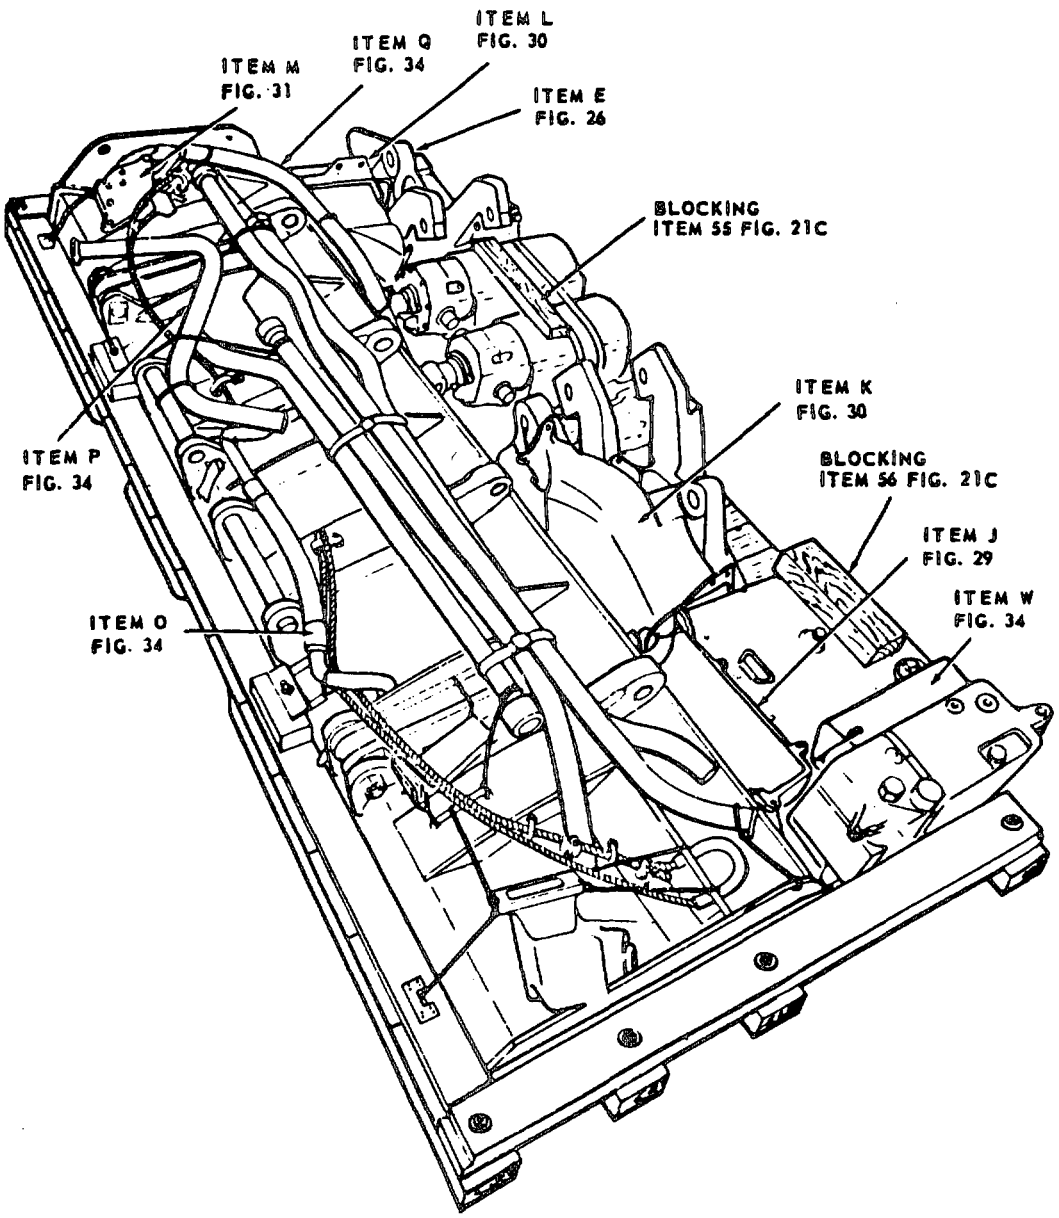


THE ITEMS IDENTIFIED ARE NESTED, STRAPPED OR WIRED IN PLACE

NOTE: THE FIGURE NO'S REFERENCED DESCRIBE THE PACKED ITEMS

FIG. 33 SECOND LAYER OF PACKED ITEMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

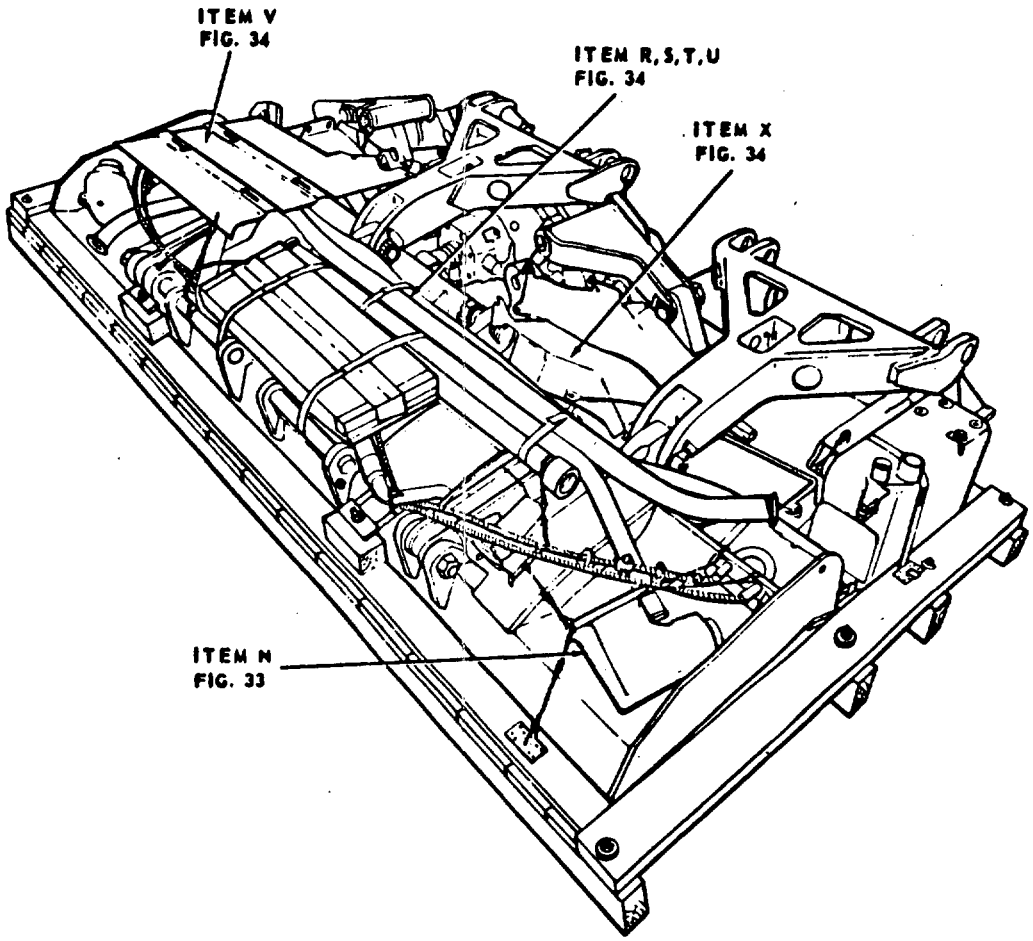

THE ITEMS IDENTIFIED ARE NESTED, STRAPPED OR WIRED IN PLACE

NOTE: FIGURE NO'S REFERENCED DESCRIBE THE PACKED ITEMS

FIG. 34 THIRD LAYER OF PACKED ITEMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.


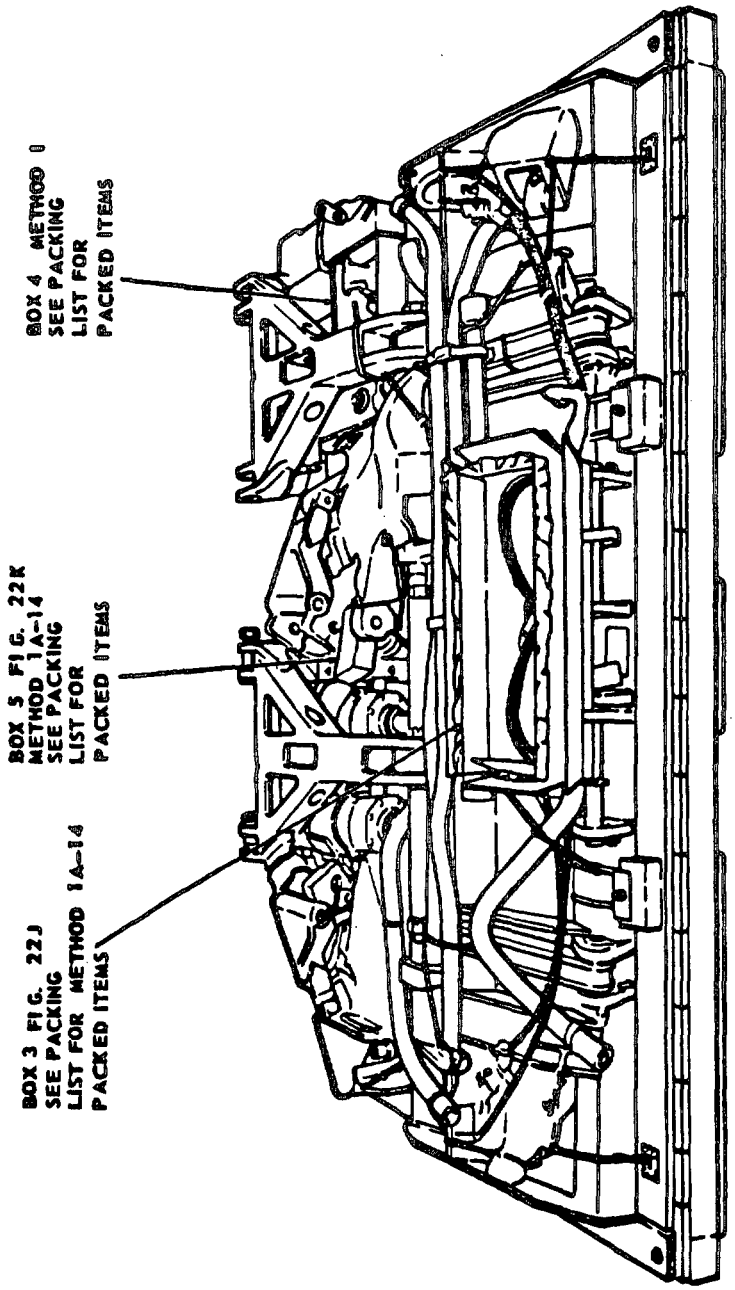


FIG. 55 EXPOSED VIEW OF BOXED ITEMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

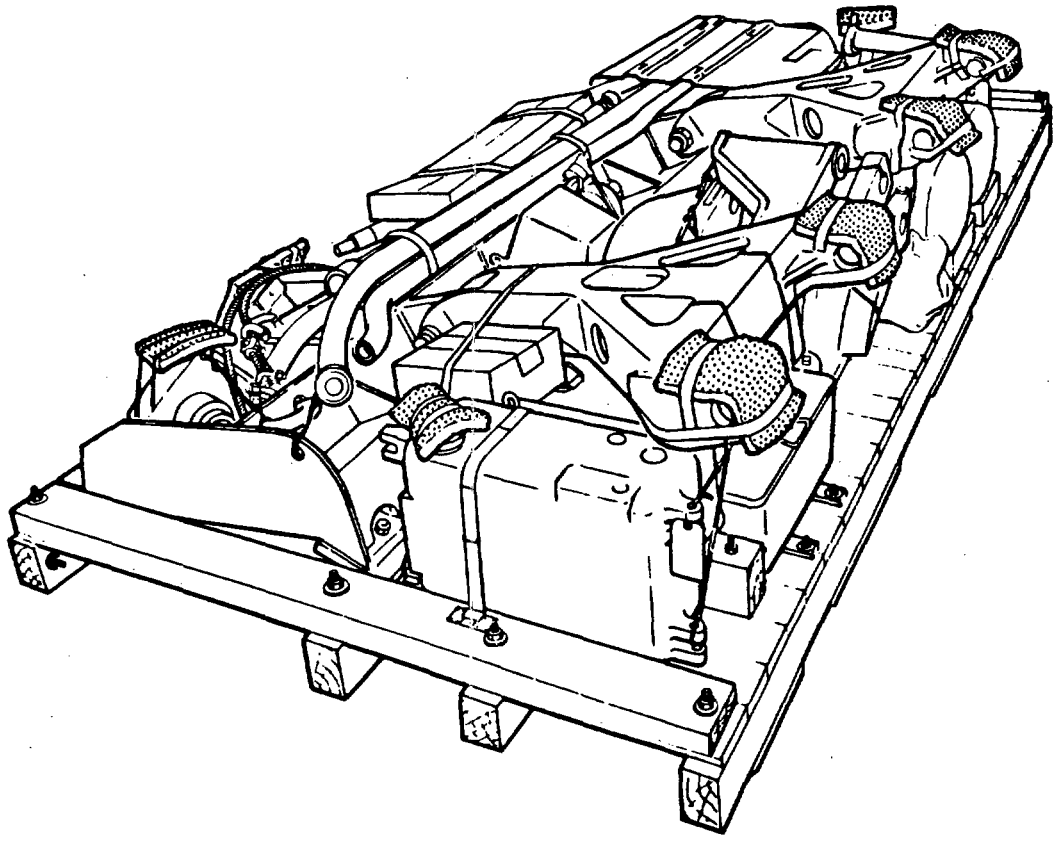

CUSHIONING MATERIAL MUST BE APPLIED TO ALL PROJECTING AND/OR SHARP CORNERS WHEN USING THE LEVEL C METHOD OF PACKING SHOWN ON FIG. 1A

FIG. 56 LEVEL C METHOD OF PACKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-B-45389A(AT)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:52Z
Check the source to verify that this is the current version before use.