
FED. SUP CLASS. 5307

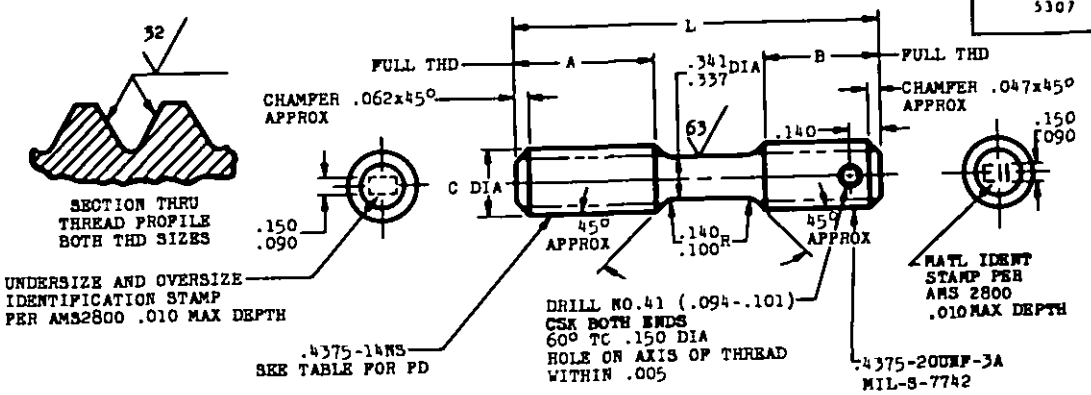

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.433 -.438	.433 -.438	.433 -.438	.433 -.438	.442 -.447	.442 -.447
PD BEFORE PLATING			.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING			.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD			.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.750	.875	.625	AN129617	AN129618	AN129619	AN129620	AN129621	AN129622
1.812	.875	.688	AN129623	AN129624	AN129625	AN129626	AN129627	AN129628
1.875	.875	.750	AN129629	AN129630	AN129631	AN129632	AN129633	AN129634
1.938	.875	.750	AN129635	AN129636	AN129637	AN129638	AN129639	AN129640
2.000	1.094	.625	AN129641	AN129642	AN129643	AN129644	AN129645	AN129646
2.062	1.094	.688	AN129647	AN129648	AN129649	AN129650	AN129651	AN129652
2.125	1.094	.750	AN129653	AN129654	AN129655	AN129656	AN129657	AN129658
2.188	1.094	.750	AN129659	AN129660	AN129661	AN129662	AN129663	AN129664
2.250	1.094	.750	AN129665	AN129666	AN129667	AN129668	AN129669	AN129670
2.312	1.094	.750	AN129671	AN129672	AN129673	AN129674	AN129675	AN129676
2.375	1.094	.750	AN129677	AN129678	AN129679	AN129680	AN129681	AN129682
2.438	1.094	.750	AN129683	AN129684	AN129685	AN129686	AN129687	AN129688
2.500	1.094	.750	AN129689	AN129690	AN129691	AN129692	AN129693	AN129694
2.562	1.094	.750	AN129695	AN129696	AN129697	AN129698	AN129699	AN129700
2.625	1.094	.750	AN129701	AN129702	AN129703	AN129704	AN129705	AN129706
2.750	1.094	.750	AN129707	AN129708	AN129709	AN129710	AN129711	AN129712
2.875	1.094	.750	AN129713	AN129714	AN129715	AN129716	AN129717	AN129718
3.000	1.094	.750	AN129719	AN129720	AN129721	AN129722	AN129723	AN129724
3.125	1.094	.750	AN129725	AN129726	AN129727	AN129728	AN129729	AN129730
3.250	1.094	.750	AN129731	AN129732	AN129733	AN129734	AN129735	AN129736
3.375	1.094	.750	AN129737	AN129738	AN129739	AN129740	AN129741	AN129742
3.500	1.094	.750	AN129743	AN129744	AN129745	AN129746	AN129747	AN129748
3.625	1.094	.750	AN129749	AN129750	AN129751	AN129752	AN129753	AN129754
3.750	1.094	.750	AN129755	AN129756	AN129757	AN129758	AN129759	AN129760
3.875	1.094	.750	AN129761	AN129762	AN129763	AN129764	AN129765	AN129766
4.000	1.594	.750	AN129767	AN129768	AN129769	AN129770	AN129771	AN129772
4.125	1.594	.750	AN129773	AN129774	AN129775	AN129776	AN129777	AN129778
4.250	1.594	.750	AN129779	AN129780	AN129781	AN129782	AN129783	AN129784
4.375	1.594	.750	AN129785	AN129786	AN129787	AN129788	AN129789	AN129790
4.500	1.594	.750	AN129791	AN129792	AN129793	AN129794	AN129795	AN129796
4.625	1.594	.750	AN129797	AN129798	AN129799	AN129800	AN129801	AN129802
4.750	1.594	.750	AN129803	AN129804	AN129805	AN129806	AN129807	AN129808
4.875	1.594	.750	AN129809	AN129810	AN129811	AN129812	AN129813	AN129814
5.000	1.594	.750	AN129815	AN129816	AN129817	AN129818	AN129819	AN129820
5.125	1.594	.750	AN129821	AN129822	AN129823	AN129824	AN129825	AN129826
5.250	1.594	.750	AN129827	AN129828	AN129829	AN129830	AN129831	AN129832
5.375	1.594	.750	AN129833	AN129834	AN129835	AN129836	AN129837	AN129838
5.500	1.594	.750	AN129839	AN129840	AN129841	AN129842	AN129843	AN129844

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

PA 11
CUST AV AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT, DRILLED, NECKED, .4375-14 x .4375-20

AN129605 THRU AN129904

Project No. 5307-0362

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.