METRIC


DOD-P-63464/5A
21 April 1982
SUPERSEDING
DOD-P-63464/5
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

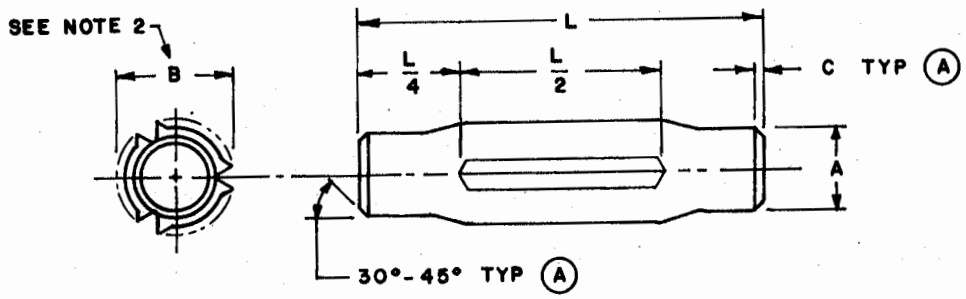

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE.

(A) denotes changes

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Carbon steel, cold-drawn, 1100 or 1200 eries.

2. Protective finish: Cadmium plate pins up to and cluding 3 mm diameter. Zinc coated pins 4 mm and larger diameter.

3. Part number: Consists of the letter "D" the basi number of this specification sheet and a dash number taken from ble I.

Example: D63464/5-01516

- length ir m
- diameter 1 10ths of mm
- specific: ion sheet number

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. (A)

Nom size		1.5	2	2.5	3	4	5	6	10
A Dia	max	1.50	2.00	2.50	3.00	4.00	5.00	6.00	10.00
	min	1.47	1.97	2.47	2.97	3.95	4.95	5.95	9.95
Recm hole size	max	1.54	2.05	2.55	3.05	4.06	5.07	6.08	10.12
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	10.00
C Chamfer length	max	0.4				0.8			1.2

L ±0.25 Length	Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05
6.00	01506	1.63	02006	2.15												
8.00	01508	1.63	02008	2.15												
10.00	01510	1.63	02010	2.15	02510	2.70	03010	3.25								
12.00	01512	1.63	02012	2.15	02512	2.70	03012	3.25	04012	4.25	05012	5.30				
16.00	01516	1.63	02016	2.15	02516	2.70	03016	3.25	04016	4.25	05016	5.30	06016	6.30		
20.00	01520	1.60	02020	2.10	02520	2.65	03020	3.20	04020	4.25	05020	5.30	06020	6.30	10020	10.45
26.00					02526	2.65	03026	3.20	04026	4.20	05026	5.25	06026	6.30	10026	10.45
30.00							03030	3.20	04030	4.20	05030	5.25	06030	6.30	10030	10.45
40.00									04040	4.20	05040	5.25	06040	6.25	10040	10.45
50.00											05050	5.25	06050	6.25	10050	10.40
60.00													06060	6.25	10060	10.40
70.00															10070	10.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0364)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.