INCH-POUND
A-A-52405A
June 20, 1995
SUPERSEDING
A-A-52405
30 November 1992
MS24521B
30 December 1977

COMMERCIAL ITEM DESCRIPTION

TEE, HOSE (LOW PRESSURE)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This commercial item description (CID) covers requirements for hose tees constructed either of corrosion resisting steel or of anodized aluminum alloy.

2. SALIENT CHARACTERISTICS.

2.1 Design and construction. The low pressure hose tee shall be designed and constructed in accordance with figure 1. The hose tee shall be either a four piece brazed body and tube construction or a one piece construction.

2.1.1 Body and tube. The four piece construction body and tubes shall be made entirely from either corrosion resisting steel or anodized aluminum alloy.


2.1.2 Brazing. Brazing when applicable shall be silver alloy filler metal for corrosion resisting steel and aluminum filler metal for aluminum alloy. Assembly shall withstand 50 psi pressure test without leakage after brazing.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-T, Warren, MI 48397-5000.

FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

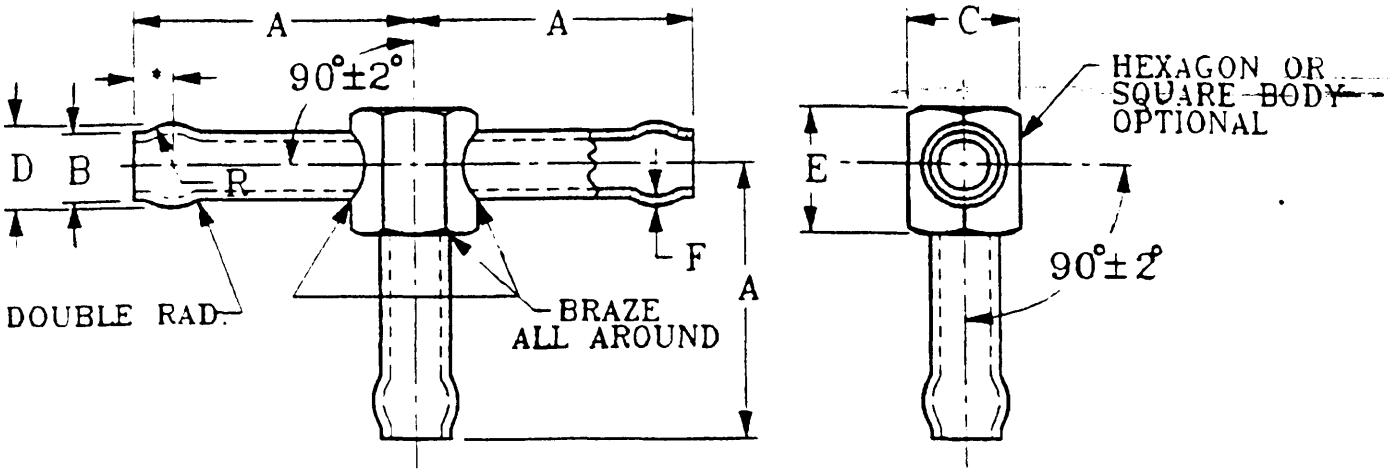

* Centerline of bulb radius (R) from tube end: 0.250 ± 0.031

CRES	Aluminum	Steel	Aluminum	Hose I.D.	A MIN.	B DIA ±0.005	C +0.000 -0.016	D DIA MIN.	E MIN.	F MIN.
PIN No.	PIN No.	Former MS Part No.								
A52405-1	A52405-2	MS24521-1	MS24521-2	0.250	1.781	0.250	0.500	0.326	0.563	0.031
A52405-3	A52405-4	MS24521-3	MS24521-4	0.375	1.859	0.375	0.688	0.451	0.719	0.031
A52405-5	A52405-6	MS24521-5	MS24521-6	0.500	1.938	0.500	0.875	0.576	0.875	0.031
A52405-7	A52405-8	MS24521-7	MS24521-8	0.625	2.000	0.625	1.125	0.701	1.000	0.045
A52405-9	A52405-10	MS24521-9	MS24521-10	0.750	2.078	0.750	1.313	0.826	1.125	0.045
A52405-11	A52405-12	MS24521-11	MS24521-12	1.000	2.219	1.000	1.625	1.124	1.438	0.045
A52405-13	A52405-14	MS24521-13	MS24521-14	1.250	2.375	1.250	2.000	1.374	1.750	0.045
A52405-15	A52405-16	MS24521-15	MS24521-16	1.500	2.547	1.500	2.375	1.644	2.000	0.045

NOTES:

1. Dimensions are in inches.
2. All tube legs - 90° apart from center line, as shown.
3. Tube bulb same at all ends.

FIGURE 1. Tee, hose (low pressure).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

2.2 Materials. The materials shall be 304L or 416L stainless steel, or 5052H32 or 6061T6 anodized aluminum as specified (see 5.1). The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 5.4).

2.3 Identification and marking. Identification and marking shall be permanent and legible and shall include the manufacturer's CAGE code and the part identification number (PIN).

3. QUALITY ASSURANCE PROVISIONS.

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the contractor's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract or order.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING.
Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see 5.1).

5. Notes.


(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

5.1 Ordering data. Acquisition documents must specify the following.

a. Title, number, and date of this CID.
b. Hose tee material, size, and PIN.
c. Selection of applicable level and packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

5.2 PIN structure. The PINs to be used for hose tees acquired to this CID are created as follows:

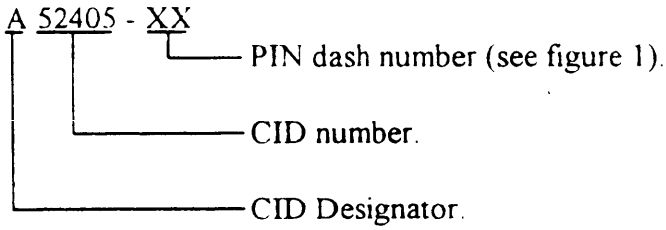

5.3 Cross-reference data. Hose tees conforming to this document are interchangeable/ substitutable with hose tees conforming to MS24521B (see figure 1).

5.4 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - AS
Air Force - 99

Review activities:
Air Force - 82
DLA - CS

CIVIL AGENCY COORDINATION ACTIVITY:
GSA-FSS

Preparing activity:
Army - AT

(Project 4730-0410)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.