RR-P-53C
August 14, 1975
SUPERSEDING
Fed. Spec. RR-P-53B
October 24, 1966

FEDERAL SPECIFICATION

PAIL, METAL, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers corrosion-resisting steel pails suitable for hospital use:

1.2 Classification. The pail covered by this specification shall be of the following sizes:

Sizes:

I - 12 - quart capacity.
II - 9 - quart capacity.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 66 - Steel: Chemical Composition and Hardenability.
Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).
Fed. Test Method Std. No. 151 - Metals; Test Methods.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration, Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof of Waterproof, Flexibl

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Corrosion-resisting steel shall conform to class 302 or 304 of Fed. Std. No. 66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.2 Construction.

3.2.1 Body. The body shall be as shown in figures 1 or 2 and shall be formed seamlessly from a single piece of corrosion-resisting steel, 0.062 inch thick minimum which shall not be reduced below 0.015 inch thick at any point in the finished pail. The surface of the bottom shall be flat or bowed slightly upward to form a stable bearing surface without rock or spin. Top rim of pail shall be flared outward and shall be unbeaded. Tolerances shown in figures 1 and 2 shall be permitted only if applied in such a manner as not to interfere with the proper stacking of the finished pails. For size II pails, the nested height of three pails (including bail ears) shall not exceed 10-5/8 inches.


3.2.2 Bail ear. The bail ear shall be fabricated from corrosion-resisting steel. The bail ears shall be located diametrically opposite each other on the upper edge of the body. The bail ears, on the size I pail, shall be designed to enable the bail to rest in a horizontal position. The bail ears on the size II pail shall not prevent the bail from resting against the upper rim of the pail body. As an alternate to being formed from the same piece as the body of the pail, bail ears attached by welding shall be acceptable; a fusion weld at the joint between the edge of the rim and the bail ear shall be required. Spot welding of the bail ear to the underside of the rim in addition to the fusion weld shall be acceptable.

3.2.3 Bail. The bail shall be formed from not less than 1/4 inch round stock corrosion-resisting steel. The bail ends shall be turned up and inward to form an over eyelet. The bail shall be semi-circular in shape and shall not be provided with a handle or grip piece. The grip area of the bail shall not extend beyond the edge of the rim.

3.3 Capacity. Minimum capacity shall be 12 quarts for the size I pail and 9 quarts for size II.

3.4 Welding. Welds shall be durable and sound in every detail. Fusion welding shall be by electric arc of oxyacetylene processes using welding rod of composition similar to the parts being welded. Welds shall be cleaned in accordance with best commercial practice. All welds shall be ground smooth so as to blend in with the adjacent surfaces. All pits, extrusions, and discoloration of spot welds shall be eliminated.

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:08Z
Check the source to verify that this is the current version before use.

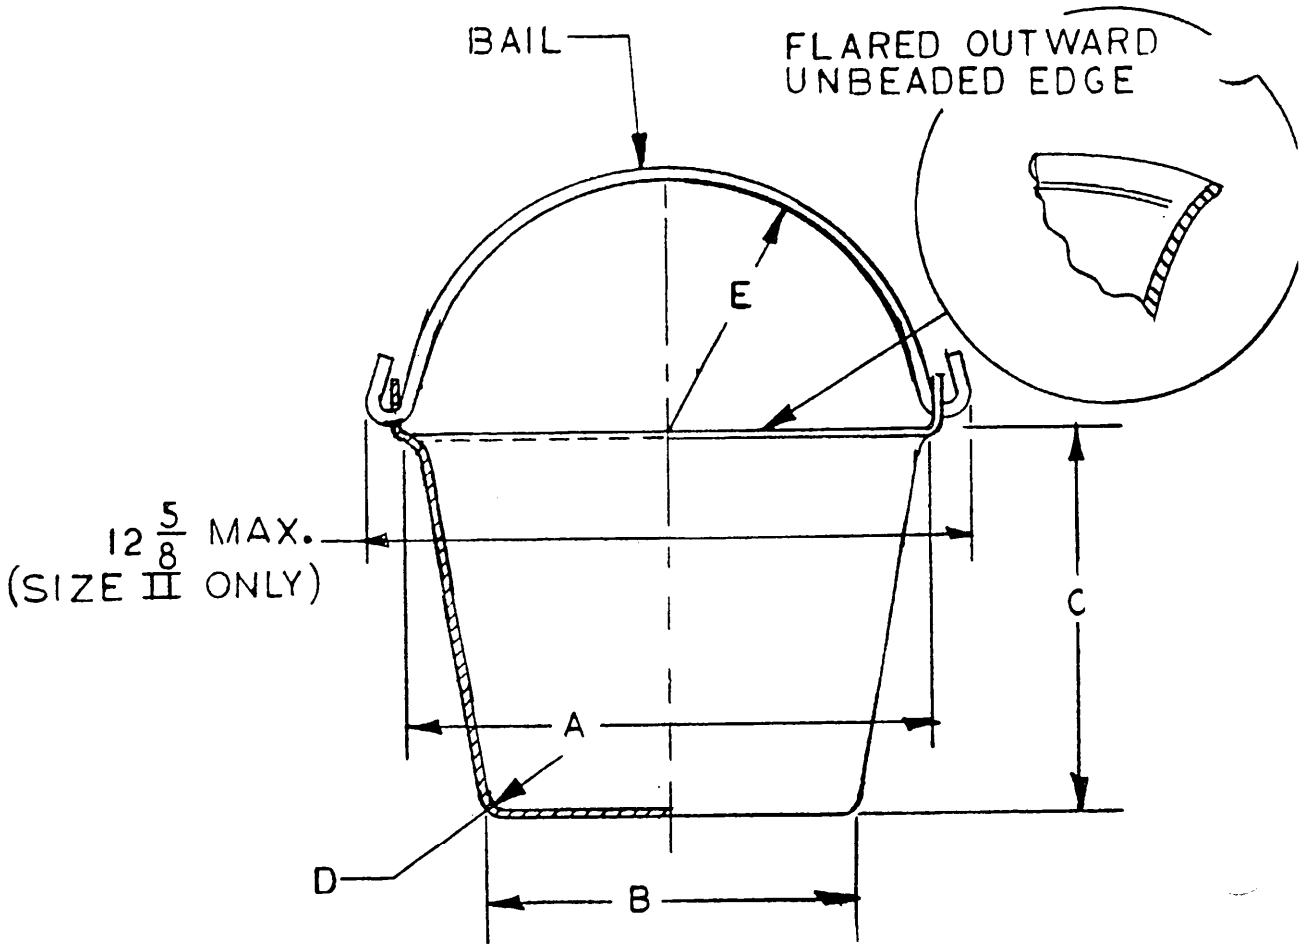


NOTE:
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE = ± 1/8
Dimensions are in inches

SIZE	QTS.	A	B	C	D	E
I	12	12 ± 1/4	8 1/8 ± 1/4	10 ± 1/4	1/4	5 7/8
II	9	10 5/8 ± 1/4	8 1/8 ± 1/4	8 1/8 (MAX)	1/4	5 5/16 ± 1/4

Figure 1. Pail, metal, corrosion-resisting steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

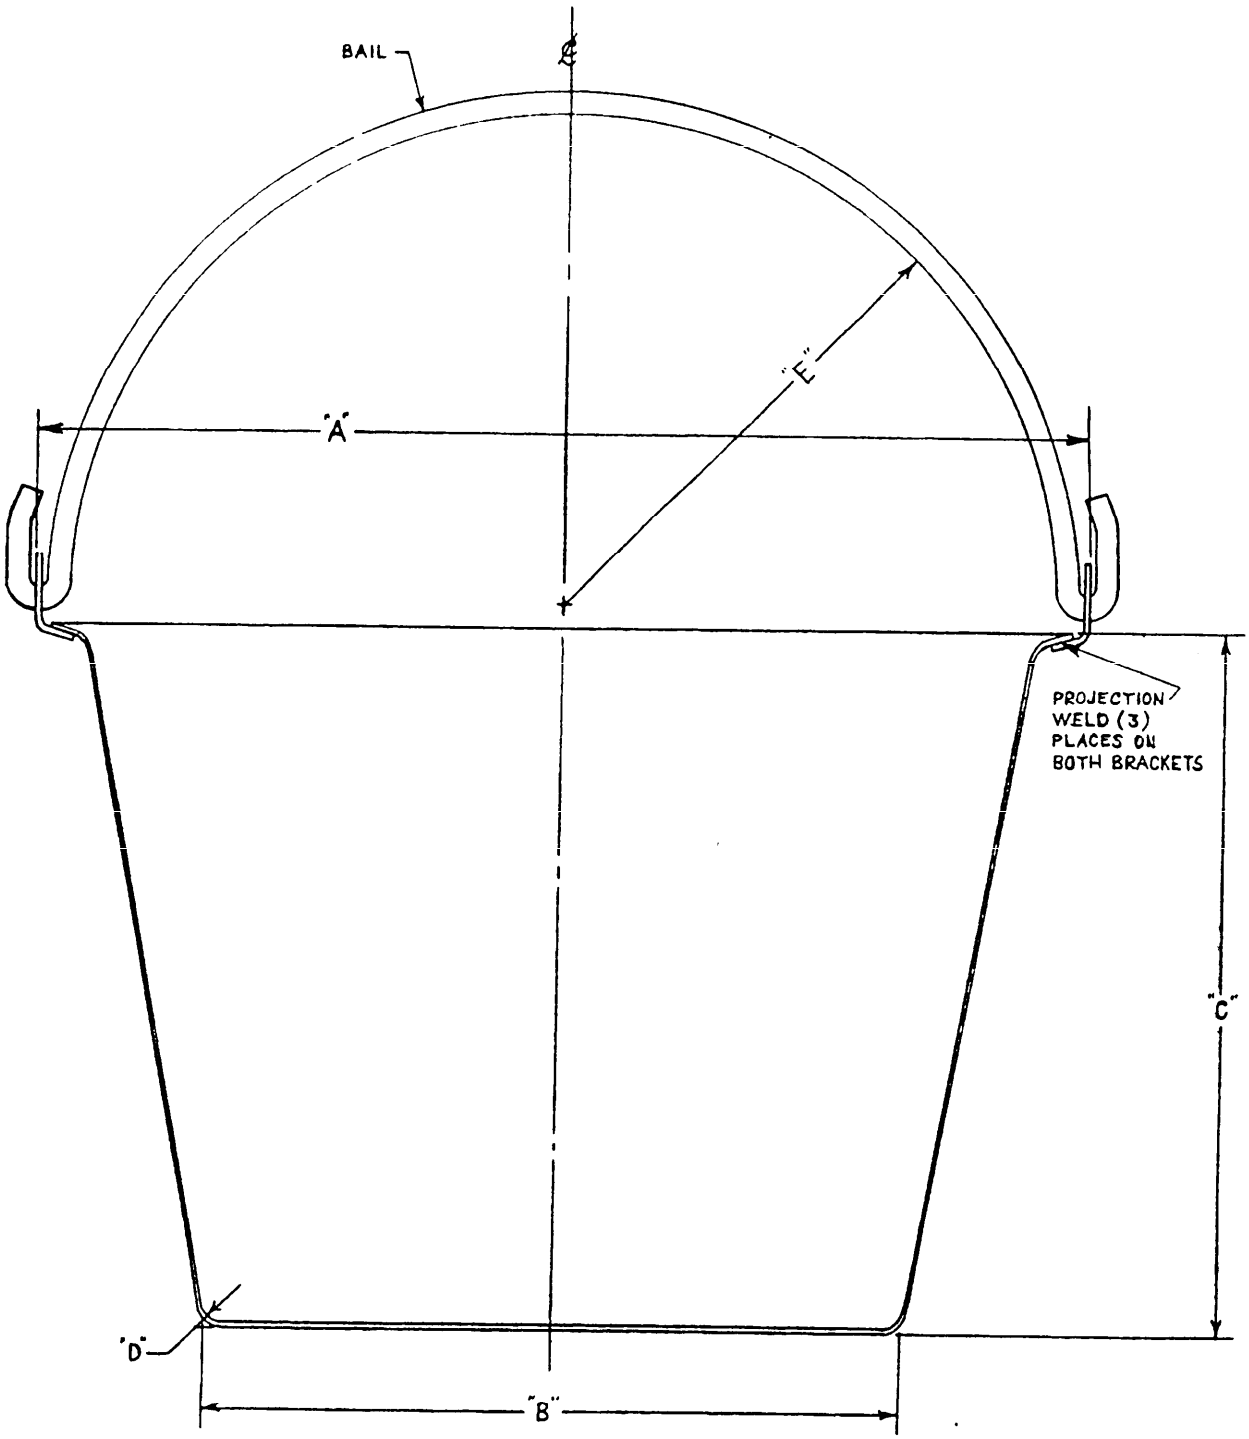

SIZE	QTS.	A	B	C	D	E
I	12	$12\frac{3}{4}$	$7\frac{7}{8}$	$10\frac{1}{16}$	$\frac{1}{4}$	$6 \pm \frac{1}{8}$
II	9	$11\frac{3}{16}$	$7\frac{7}{8} \pm \frac{1}{8}$	$7\frac{7}{8} \pm \frac{1}{8}$	$\frac{1}{4}$	$5\frac{1}{2} \pm \frac{1}{8}$

NOTE:-
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE = ± 1/8
Dimensions are in inches

Figure 2. Pail, metal, corrosion-resisting steel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5 Finish. The finish shall be equal to, or better than, No. 4 commercial finish. The pails shall be thoroughly cleaned to remove foreign particles such as dirt, grease, graphite, and metal.

3.6 Identification marking. Each pail shall be impressed on the outside bottom with the manufacturer's name or registered trademark. All impressions shall be legible, permanent, and shall be made at even pressure so as not to penetrate the inside surface of the pail body.

3.7 Workmanship. The pails shall be free from defects which may affect their appearance or may impair their serviceability, and shall be free from rough grind marks, trimming marks, pits, scales, or other defects or imperfections. All surfaces shall have a smooth finish and shall be free from sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ass. that supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the steel may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The Certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I.

TABLE I.

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	II	1.0
Total (major and minor defects combined)	II	4.0
For dimensional examination	S-3	2.5

4.3 Examination. The pails shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects as indicated in table II.

TABLE II.

Categories	Defects 1/
Major:	
101	Pail components not free of cracks, tears, ripples, dents.
102	Edges not free of burs, sharpness.
103	Top rim of pail body not as specified.
104	Welds not sound, smoothly blended, free of flux, discoloration, spatter.
105	Bail not resting in a horizontal position on Size I pail.
106	Bail does not pivot freely and easily within its range of travel.
107	Bail loops not secure in bail ears.
108	Identification marking visible on the inside surface of the pail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

Minor	
201	Finish not smooth, uniform.
202	Pails not clean, not free of dirt, grease, oil, chips, foreign matter.
203	Identification marking not present, complete, permanent, legible.
204	Pail does not bear evenly on a flat surface.

1/Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The pails shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.5 Examination for preparation for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored as specified in table III. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

TABLE III

Examination	Defect
Containers	Not as specified.
Quantity	Quantity in interior packages and shipping containers not as specified.
Packaging and Packing Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as imcomplete closure of container flaps, tape improperly applied, or containers distorted.
Markings	Omitted, incorrect, illegible, improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Intermediate package. Three pails shall be nested and packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Box shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to the contents. Closure shall be adequate to prevent accidental opening.

5.1.2 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Twelve (12) pails shall be packed in a box designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof in accordance with PPP-B-636.

5.2.2 Level B. Twelve (12) units shall be packed in a box designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers or the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with Fed. Std. No. 123.

5.3.2 Military activities.

5.3.2.1 Intermediate package. Each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The size I pail shall be suitable for use with 6530-00-773-1450 Carriage, Pail, Corrosion-Resisting Steel. The size II pail is a component of 6545-00-959-1445 Utensil Set, intended for use in field hospital operating rooms.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Size required (see 2.1).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification covers the following items listed in the Federal Supply Catalog:

NSN	Item Identification	Specification Designation
7240-00-772-5945	PAIL, UTILITY, Corrosion-Resisting Steel, 9 qt.	Size II
7240-00-773-0975	PAIL, UTILITY, Corrosion-Resisting Steel, 12 qt.	Size I

6.4 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - MD
Navy - MS
Air Force - 03

Civil Agency Coordinating Activity:

GSA - FSS

Preparing activity:

DSA - DM

Project No. 7240-0188

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

RR-P-53C Pail, Metal, Corrosion-Resisting Steel.

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.