INCH-POUND

MIL-DTL-83528/1D
15 November 2001
SUPERSEDING
MIL-G-83528/1C
10 July 1992

DETAIL SPECIFICATION SHEET

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, CIRCULAR STRIP, .040 THROUGH .250 DIAMETER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-DTL-83528.

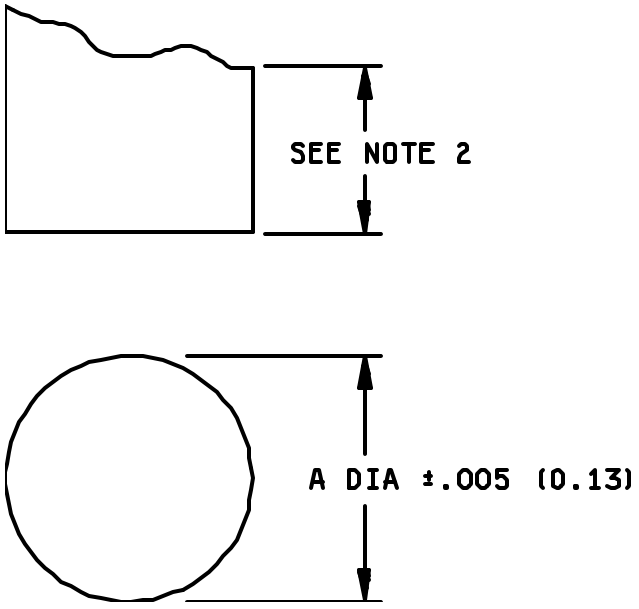

NOTES:
1. Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
2. Length shall be as specified on the purchase order.
3. Tolerance on flash shall be ± .008 (0.20 mm) on the extension and ± .005 (0.13 mm) on the thickness.

FIGURE 1. EMI/RFI circular strip gasket.

DISTRIBUTION STATEMENT A . Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and interface: See figure 1 and table I.

Material: Type A, B, C, D, E, F, H, J, K, L, or M.

Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

TABLE I. Dimensions.

PIN 1/ M83528/001X	Dimension A ± .005 2/ 3/	Cross section 4/ area (cm^2)
001	.040 (1.02)	.008
002	.053 (1.35)	.014
003	.062 (1.57)	.020
004	.070 (1.78)	.025
005	.080 (2.03)	.032
006	.093 (2.36)	.043
007	.103 (2.62)	.053
008	.119 (3.02)	.072
009	.125 (3.18)	.079
010	.139 (3.53)	.099
011	.188 (4.78)	.179
012	.216 (5.49)	.236
013	.250 (6.35)	.316

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M38528/001A001.
2/ Tolerance shall be ± .008 for parts over .200 in diameter.
3/ Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
4/ For calculation of volume resistivity (for reference only).

TABLE II. Supersession information.

PIN 1/ M83528/001X	Superseded DESC drawing PIN 85103X 1/
001	001
002	002
003	003
004	004
005	N/A
006	005
007	006
008	007
009	008
010	009
011	N/A
012	010
013	N/A

1/ "X" in the PIN indicates the applicable material type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force – 19, 99
NSA – NS

Preparing activity:
DLA - CC

(Project 5999-0375-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.