MILITARY SPECIFICATION

SCISSORS, BANDAGE, ANGULAR, LISTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers angular bandage scissors of the Lister design.

1.2 Classification. The bandage scissors shall be of the following sizes, as specified (see 6.2):

Size 1 - 5 1/2 inches
Size 2 - 7 1/4 inches

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or requests for proposals form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-I-526 - Instruments, Dental and Surgical, General Specifications.
JJ-S-746 - Stockinet, Surgical.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-585 - Boxes, Wood, Wirebound.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, Pa. 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Shipping, Fiberboard.
PPP-B-676 - Boxes, Set-Up, Paperboard.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-L-10547 - Liners, Case, Waterproof.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. The bandage scissors shall be in accordance with the applicable requirements of GG-I-526, and as specified herein.

3.2 Material. The bandage scissors shall be fabricated from class 4, type 420 material in accordance with the requirements of GG-I-526 except that the carbon content shall be 0.30 percent minimum.

3.3 Hardness. After proper stress relieving, the bandage scissors shall exhibit a Rockwell hardness of C50 to C55, with the exception of the screw.

3.4 Style, design, and dimensions. The bandage scissors shall be of the Lister design, angular type, having the point of one blade blunted and flattened and so shaped as to afford insertion between bandage and patient without harm to tissues. The blunted blade shall be smooth and free of sharp edges. The dimensions of the bandage scissors shall be in accordance with figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

3.5 Finish. The bandage scissors shall have a mirror finish except for the inside of the blades which shall be crocus.

3.5.1 Passivation. The entire scissors shall be properly passivated.

3.6 Scissors performance. The scissors shall cut a continuous length of at least 1 1/4 inches of the test material when tested as specified in 4.4.1.

3.7 Identification marking. In addition to GG-I-526 requirements, scissors of foreign manufacture shall also be marked "stainless".

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as indicated in table I. The unit of product for examination purposes shall be one bandage scissors.

TABLE I. Sampling for examination.

Type defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor	II	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as indicated in table II. **The unit of product for test purposes shall be one bandage scissors. Where feasible, the same sample shall be used for the determination of two or more test characteristics.**

TABLE II. Sampling for tests.

Component	Characteristic	Requirement	Test procedure	Inspection level	AQL (percent defective)
Bandage scissors	Hardness	3.3	GG-I-526	S-2	1.5
	Performance	3.6	4.4.1	S-2	1.0
	Copper sulfate	GG-I-526	GG-I-526	S-2	1.0
	Boil test	GG-I-526	GG-I-526	S-2	1.0

4.2.3 Composition analysis. A sufficient quantity of each lot of metal used in the manufacture of the bandage scissors shall be selected for composition analysis in accordance with GG-I-526.

4.3 Examination.

4.3.1 Bandage scissors. The bandage scissors shall be examined to determine compliance with all the requirements contained in this specification. Examination shall be conducted as specified in tables I and III. Examination, however, shall not be restricted to defects listed in table III. Any bandage scissors in the sample containing one or more defects shall be rejected and if the number of defective bandage scissors in any sample exceeds the acceptance number for that sample, the lot represented by that sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects.

Categories	Defects
Critical	None defined.
Major:	
101	Scissors blades not of angulated design with blunted probe tip.
102	Scissors halves not properly assembled with respect to each other as shown in figure 1.
103	Cutting action of scissors not free of excessive stiffness.
104	Probe tip not smoothly finished or free of sharp edges.
105	Screw in lock not permanently set.
106	Screw lock not properly assembled.
107	Cutting edges not free of nicks, feathers, or burrs.
108	Surfaces of scissors not free of pits, corrosion, discoloration, or plating.
109	Scissors not free of cracks.
110	Scissors surfaces not free of burrs, sharpness (except cutting edges) or roughness.
Minor:	
201	Finish not mirror and crocus as specified.
202	Finish not free of coarse grind marks or excessive scratched surface areas.
203	Identification marking not permanent, legible or complete.

4.3.2 Dimensions. The bandage scissors shall be examined for defects in dimensions. Any dimension not within the tolerance specified in figure 1 shall be classified as a defect. Inspection level shall be S-2 with an AQL of 2.5.

4.3.3 Packaging inspection. The inspection of the preservation-packaging and interior package marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.4.1 Scissors performance test. The test material shall be surgical stockinet meeting the requirements of JJ-S-746, type I. Scissors to be tested shall be cleaned prior to test. Three separate, consecutive tests shall be performed with each scissors. Each test shall consist of making one cut through two plies of test material at right angles to the ribs of the material. Each cut shall be made using the scissors in the normal manner, i.e., with the examiners fingers in the finger rings of the instrument, except that no lateral pressure shall be exerted.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Scissors shall be cleaned as specified in MIL-P-116, process C-1.

5.1.1.2 Drying. Scissors shall be dried as specified in MIL-P-116.

5.1.1.3 Preservative application. Preservatives shall not be used.

5.1.1.4 Unit packaging. Each pair of scissors shall be packaged in accordance with MIL-P-116, method IC-1.

5.1.1.5 Intermediate package. Twelve unit packages containing scissors of one size only shall be packaged in a box conforming to PPP-B-566, PPP-B-636, class domestic or PPP-B-676. Closure shall be as specified in the appendix of the applicable box specification.

5.1.2 Level C. Scissors shall be clean, dry and individually packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Twenty-four intermediate packages (288 units) containing size 1 scissors or twelve intermediate packages (144 units) containing size 2 scissors shall be packaged in an exterior container designed for a type 2 load and conforming to PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof as specified in the appendix of PPP-B-636.

5.2.2 Level B. Twenty-four intermediate packages (288 units) containing size 1 scissors or twelve intermediate packages (144 units) containing size 2 scissors shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The packaged scissors shall be packed in shipping containers in a manner that will afford adequate protection against damage during shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier rules and regulations.

5.3 Marking. Each unit package, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The bandage scissors covered by this specification are intended for use in the removal of surgical bandages by the insertion between bandage and patient without harm to tissues.

6.2 Ordering data. The procurement document should specify the following:

(a) Title, number and date of this specification.
(b) Size (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) National Stock Number (NSN).

6.3 This specification is intended to cover the following items appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6515-00-363-8800	Scissors, Bandage, Angular, Lister, 5 1/2 inch
6515-00-363-8840	Scissors, Bandage, Angular, Lister, 7 1/4 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

6.1 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.


Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DLA-DM

Project No. 6515-2090

Review activity:
DoD - MB

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

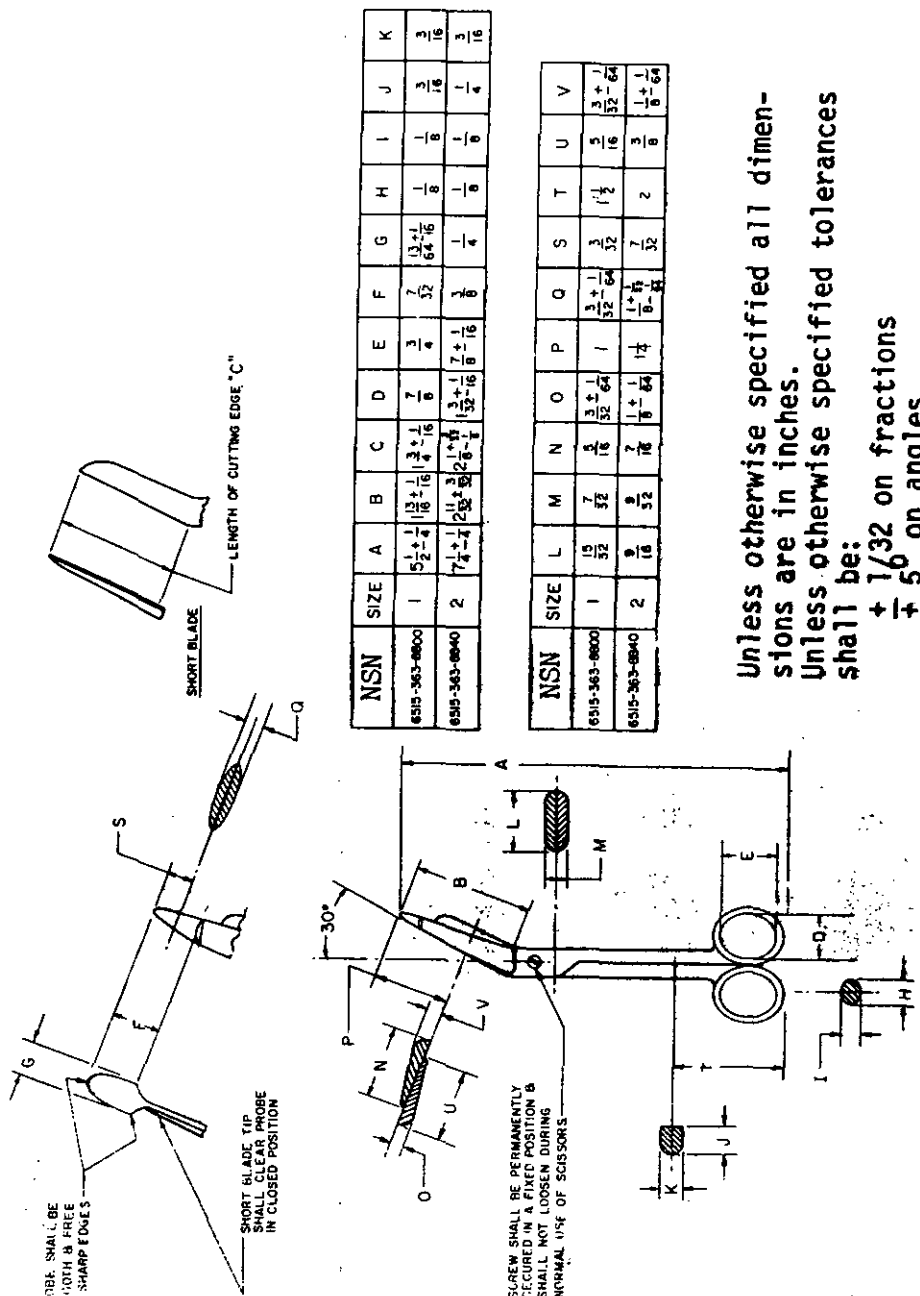

NSN	SIZE	A	B	C	D	E	F	G	H	I	J	K
6515-363-8800	1	$5\frac{1}{2}\pm\frac{1}{4}$	$1\frac{3}{16}\pm\frac{1}{16}$	$\frac{3}{4}\pm\frac{1}{16}$	$\frac{7}{8}$	$\frac{3}{4}$	$\frac{7}{32}$	$\frac{13}{64}\pm\frac{1}{16}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{3}{16}$	$\frac{3}{16}$
6515-363-8840	2	$7\frac{1}{4}\pm\frac{1}{4}$	$2\frac{11}{32}\pm\frac{3}{32}$	$1\frac{1}{16}\pm\frac{1}{16}$	$1\frac{3}{32}\pm\frac{1}{16}$	$1\frac{7}{16}\pm\frac{1}{16}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{4}$	$\frac{3}{16}$

NSN	SIZE	L	M	N	O	P	Q	S	T	U	V
6515-363-8800	1	$\frac{15}{32}$	$\frac{7}{32}$	$\frac{5}{16}$	$\frac{3}{32}\pm\frac{1}{64}$	1	$\frac{3}{32}+\frac{1}{64}$	$\frac{3}{32}$	$1\frac{1}{2}$	$\frac{5}{16}$	$\frac{3}{32}-\frac{1}{64}$
6515-363-8840	2	$\frac{9}{16}$	$\frac{9}{32}$	$\frac{7}{16}$	$\frac{1}{8}\pm\frac{1}{64}$	$1\frac{1}{4}$	$\frac{1}{8}-\frac{1}{64}$	$\frac{7}{32}$	2	$\frac{3}{8}$	$\frac{1}{8}\pm\frac{1}{64}$

Unless otherwise specified all dimensions are in inches.
Unless otherwise specified tolerances shall be:
$\pm 1/32$ on fractions
$\pm 5^{0}$ on angles

FIGURE 1. Scissors, bandage, angular, Lister.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-36061A SCISSORS, BANDAGE, ANGULAR, LISTER

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA: 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD : 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA: 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.