INCH-POUND
MIL-M-24784/9(SH)
6 September 1994
SUPERSEDING
MIL-T-24747(SH)
12 October 1990

ASSOCIATED DETAIL SPECIFICATION

MANUAL, TECHNICAL REPAIR STANDARDS (TRS) REQUIREMENTS FOR ORDNANCE EQUIPMENT

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification sets forth the content requirements and instructions for the development of technical repair standards (TRSs) for use in performing class B overhauls to ordnance equipment and components.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, SEA 03R42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N6946 AREA TMSS
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-M-24784 - Manual, Technical: General Acquisition and Development Requirements.
MIL-M-24784/1 - Manual, Technical Change Package Requirements.
MIL-M-24784/2 - Manual, Technical Revision Requirements.

STANDARDS

MILITARY

MIL-STD-973 - Configuration Management.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

PUBLICATIONS

DEPARTMENT OF DEFENSE

DoD 5200.1-R - Information Security Program Regulation.
DoD 5220.22-M - Industrial Security Manual for Safeguarding Classified Information.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications), the text of this specification shall take precedence. When a generic requirement is in conflict with a unique requirement from the governing associated detail specification, the unique requirement shall take precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Security classifications. The overall classification assigned to a technical manual shall agree with the highest classification assigned to any portion within and shall be placed conspicuously at the top and bottom of the Cover/Title page or abbreviated title. Security classification markings shall be in accordance with DoD 5220.22-M and 5200.1-R and shall be placed in accordance with DoD 5220.22-M and 5200.1-R. The security markings shall be the same as for other title pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

3.2 Deliverable products and data items. The deliverable products and data items shall be specified in the Contract Data Requirements List (CDRL) and shall conform to the requirements specified in MIL-M-24784 and herein. Data items shall include the following, as applicable:

(a) Outline or book plan.
(b) Review draft copy (RDC).
(c) Preliminary technical manual (PTM).
(d) Final reproducible copy (FRC).
(e) Supplements.
(f) Changes (see 3.2.1).
(g) Revisions (see 3.2.2).
(h) Management Data (see 3.2.3).
(i) Engineering judgement record (see MIL-M-24784).
(j) Cost and pricing data (see MIL-M-24784).

3.2.1 Change packages. When specified (see 6.2), change packages shall be in accordance with MIL-M-24784/1.

3.2.2 Revisions. When specified (see 6.2), revisions shall be in accordance with MIL-M-24784/2.

3.2.3 Management data. Unless otherwise specified (see 6.2), the following quality assurance data items shall be provided in accordance with MIL-M-24784:

(a) Technical Manual Quality Assurance Program Plan.
(b) Validation Plan.
(c) Validation Certification.
(d) Technical Manual Evaluation Records.
(e) Verification Plan.
(f) Technical Manual Verification Incorporation Certification.

3.3 Arrangement. Unless otherwise specified, the manual shall be arranged in a standardized format (that is, front matter, technical content, appendices, glossaries, indexes and back matter) and appropriately divided by volume, part, chapter and section in accordance with the requirements of MIL-M-24784, Appendix C and the following.

3.3.1 TRS subject matter. The TRS shall provide detailed instructions for performing a class B overhaul. The TRS shall discuss critical procedures (see 6.5.1), testing and maintenance examinations, supporting illustrations, lists of items to be replaced and any special tools needed for the overhaul. The TRS shall also describe critical operations and checks that must be done during item reassembly, minimum quality control requirements, and specific post-overhaul inspections. The technical content for systems and equipment shall be formatted to meet ordnance (see 3.5) requirements. The TRS sequence and breakdown of divisions shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

(a) The technical content shall follow the front matter and shall be arranged in chapters. Each chapter shall consist of one or more sections that are divided into main paragraphs, and then subdivided into subparagraphs. Each section and major (numbered) paragraph shall have a brief title describing the content or action required. The level of detail shall be geared to the journeyman-level mechanic.
(b) Technical content for a compound (composite) item, with major subassemblies (see 6.5.5), shall be divided so that each major item will be addressed in a separate chapter to promote the work-unit, work-package concept (see 6.5.6).
(c) Minor assemblies shall be divided into separate sections and included with their major subassemblies, to promote work group breakdown structure of authorized overhaul facilities.

3.3.2 Multipart volumes. The TRS shall be divided into two parts. Part 1 shall contain all overhaul procedures, requirements, and drawings necessary to perform the overhaul. Part 2 shall record all readings specified in part 1.

3.4 Format and development instructions.

3.4.1 Writing style. Unless otherwise specified, the style of writing, level of writing, readability, and referencing shall be in accordance with the requirements of MIL-M-24784, Appendix B.

3.4.2 Safety precautions. Unless otherwise specified, safety and health warnings, cautions and notes shall be in accordance with the requirements of MIL-M-24784, Appendix D.

3.4.3 Tabular material. Unless otherwise specified, the preparation of tables shall be in accordance with the requirements of MIL-M-24784, Appendix E.

3.4.4 Graphics. Unless otherwise specified, the preparation of illustrations, drawings, diagrams and sketches shall be in accordance with the requirements of MIL-M-24784, Appendix F.

3.4.5 Numbering. Unless otherwise specified, the numbering of paragraphs, procedures, divisions, issues, changes, illustrations, tables, and publications shall be in accordance with the requirements of MIL-M-24784, Appendix G.

3.5 Ordnance TRS technical content. The sequence of ordnance TRSs shall conform to the following:

(a) Title page (see MIL-M-24784).
(b) Front matter (see MIL-M-24784).
(c) Chapter 1 - General requirements information (see 3.5.1).
(d) Chapter 2 - Examination, tests, and corrective actions (see 3.5.2).
(e) Chapter 3 - Planned overhaul/repair maintenance (see 3.5.3).
(f) Chapter 4 - Reassembly and grooming (see 3.5.4).
(g) Chapter 5 - Final acceptance tests (see 3.5.5).
(h) Chapter 6 - Facilities, equipment and personnel requirements (see 3.5.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

(i) Chapter 7 - Preservation, packaging, handling, storage, and transportation requirements (see 3.5.7).
(j) Chapter 8 - Overhaul/repair record requirements (see 3.5.8).
(k) Appendix A - Contingency material list (see 3.5.9(a)).
(l) Appendix B - Planned overhaul/repair material list (see 3.5.9b).
(m) Appendix C - Traveler and inspection/discrepancy/repair record (see 3.5.8.2).
(n) Enclosures (see 3.5.10).
(o) TMDERs (see MIL-M-24784).

3.5.1 Chapter 1 - General requirements information. This chapter delineates repairable end-product requirements, procedures for obtaining changes or waivers, and work flow diagrams or charts. The chapter shall include, as a minimum, the following information.

3.5.1.1 Frontispiece illustration. A pictorial representation of the repairable items (see 6.5.4) covered in the TRS shall be placed on the left-hand page preceding Chapter 1 (see MIL-M-24784).

3.5.1.2 Content. Chapter 1 shall include statements that:

(a) The overhauling or repairing activity is responsible for overhauling or repairing the system, equipment, or component so that it satisfies the post-overhaul or repair requirements specified in Chapter 5 - final acceptance test (see 6.5.2).
(b) When there is conflict between the TRS and original design, the requirements in the TRS and associated quality assurance test and inspection plans (QATIPs) shall take precedence. Prior to the inclusion of procedures in the TRS and QATIPs that are in conflict with original design criteria, approval shall be obtained from the life cycle manager (LCM).
(c) Component configuration changes shall not be made when such changes will prohibit use of approved parts for the item involved unless required engineering changes, waivers, or deviations have been obtained in accordance with provisions of MIL-STD-973. This action shall be detailed in order to maintain authorized configurations.
(d) Production process flow charts or work flow block diagrams (see MIL-M-24784) graphically depicting the sequence of repair or overhaul events required to occur throughout the maintenance process described in the TRS. These displays may consist of an overall block diagram depicting the entire process with more detailed flow charts for specific phases or repair or overhaul activity. Sufficient detail should be provided to clearly illustrate the described process.
(e) TRS users' comments procedure is included. A brief instruction to the TRS user shall be developed in accordance with the requirements of 3.5.1.3.

3.5.1.3 User's comments procedure. A brief instruction to the manual user shall specify that comments or recommendations concerning the manual are to be forwarded for consideration (see MIL-M-24784).

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:22Z
Check the source to verify that this is the current version before use.

3.5.2 Chapter 2 - Examination, tests, and corrective actions. This chapter shall include maintenance requirements and associated actions, and shall include the following information.

3.5.2.1 Pre-overhaul and repair maintenance inspection. Examinations and inspections required prior to and during repair and refurbishment to determine the need for work in addition to that prescribed by planned overhaul or repair maintenance (see 6.5.3), commensurate with prescribed levels of maintenance shall be specified. The method of examination of inspection shall be described and acceptance and rejection criteria specified. Examples of items and examination and inspection criteria are set forth in 3.5.2.5.

3.5.2.2 Pre-overhaul and repair performance or other evaluation tests. Performance or other evaluation tests necessary for item failure diagnosis and for the determination of requirements for corrective maintenance in addition to that prescribed by planned overhaul or repair maintenance shall be specified. Testing and evaluation requirements shall be scaled to the activity level of maintenance and shall specify the detailed steps for test accomplishment.

3.5.2.3 Corrective maintenance actions. Corrective maintenance actions appropriate to the level of maintenance which are acceptable to correct deficiencies found during pre-overhaul and repair performance tests and examinations and inspections shall be specified (see 6.2). Corrective actions include replacement, repair, or refurbishment. Where corrective actions must be accomplished and certified in accordance with a specific procedure, the TRS shall invoke the applicable procedure.

3.5.2.4 Recording results. Methods for recording inspection and examination results, and corrective actions taken shall be specified. Distribution requirements for reports shall be identified.

3.5.2.5 Inspection and acceptance criteria. Inspection and acceptance criteria shall include the following:

(a) Items that are subject to wear, corrosion, erosion, and aging shall be examined and tested to see whether such wear or other deterioration would ultimately result in failure to meet performance specifications. Specific acceptance criteria shall be furnished in the TRS for each such item. The criteria shall be based on actual wear, corrosion, erosion, and aging data when such data are available. These criteria shall be based on ensuring satisfactory performance for the planned period of service between refurbishments for the particular item. The criteria will in many instances be a matter of engineering judgement when wear or deterioration rates have not been established for shipboard operating conditions.

(b) Where specific parts are mentioned, the part number (NSN, national item identification number (NIIN), manufacturers or Government part number as applicable), and applicable reference document shall be written in the TRS text to minimize the possibility of misunderstanding.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:22Z
Check the source to verify that this is the currentversion before use.

(c) When the technical manual includes charts of clearances and tolerances, this information may be used as a starting point in specifying allowable wear. The following list illustrates typical examples of items and applicable criteria of acceptability:

(1) Bushings or bearings and mating shafts. Clearances or dimensions.
(2) Pump wear rings or rotors. Clearances or dimensions.
(3) Thrust bearings. End play.
(4) Gear trains. Backlash, contact pattern, and alignment.
(5) Pressure containing parts. Wall thickness (thinnest area, erosion path, or both), and leakage rate.
(6) Couplings and shafts. Alignment and clearance.
(7) Piping, valves, fittings. Thickness and leakage rate.
(8) Operating mechanisms. Backlash or play.
(9) Cylinders and pistons. Clearances, diameters, and leakage rate.
(10) Valves, disks, and seats. Dimensions for important parts, seat angles, seat rings, ball diameters.
(11) Electrical wire. Insulation resistance.
(12) Switches, transformers, relays, and other electronic or electrical components. Electrical and mechanical characteristics.

3.5.3 Chapter 3 - Planned overhaul and repair maintenance.

3.5.3.1 Planned overhaul and repair requirements. Planned overhaul and repair requirements delineated in scope to appropriate level of maintenance shall be specified. These requirements shall include cleaning, refurbishing, and replacement of parts. By planned overhaul or repair work, it is intended to mean the minimum maintenance work for the system, equipment, or compound regardless of condition. These requirements shall be delineated to reflect the extent of maintenance to be performed by specific levels of maintenance such as designated overhaul activity and specialized overhaul activity (DOA/SOA), and designated repair activity and tender repair (DRA/TR). Examples of presentation styles are shown in MIL-M-24784. Such requirements are not dependent on data obtained from pre-overhaul and repair examination and tests. The requirements shall be determined by application of engineering judgement and consideration of the following:

(a) Review of the design.
(b) Service of the item.
(c) Past experience.
(d) Performance requirements.
(e) Trade-off in cost and reliability between individual part replacement versus part refurbishment.

3.5.3.2 Disassembly instructions. General disassembly instructions will normally suffice except in cases when certain detailed disassembly procedures are required to prevent damage to critical components or when personnel safety may be jeopardized. In these cases, disassembly procedures and limits shall be specified to the degree appropriate to the level of maintenance. When disassembly instructions are given correctly in technical manuals, the manuals may be referenced if

Source: https://assist.dla.mil -- Downloaded: 20261-20T02:22Z
Check the source to verify that this is the current version before use.

instructions are lengthy and require the manual to ensure clarity and comprehension. When examinations, inspections, and tests shall be performed prior to or during disassembly, the TRS shall so specify. QATIPs hold points shall be specified. Detailed disassembly instructions apply to actions required for both planned and corrective overhaul and repair maintenance.

3.5.3.3 Planned maintenance lists. Planned overhaul and repair material lists shall be included. These lists shall identify those parts which are specifically required to be replaced regardless of their condition. Selected materials shall be on hand at the appropriate maintenance level activities to accomplish the planned maintenance actions in accordance with the TRS. These material lists, depending upon extent, may either be contained in the body of the TRS or placed in an appendix and referred to in the body of the TRS.

NOTE: No direct or indirect citation of the actual failure rate of any part is allowed. Technical manuals shall not list or cite any figures of merit for the reliability or maintainability of the equipment (or parts) at any level of indenture.

3.5.3.4 Contingency material list. Contingency material lists shall be included (see figure 9-1). These lists shall identify those parts based on engineering analysis or experience, delineated with respect to levels of maintenance, which may be expected to require some replacement. It shall be stated that the contingency material lists are provided so that the maintenance activity will have the necessary material on hand if required. It is not intended to make the acquisition of such material mandatory. Contingency material lists may be either contained in the TRS body or placed in an appendix and referred to in the body of the TRS.

3.5.3.5 Criteria for suitability of worn-in parts versus new parts. Criteria shall be provided by which the overhauling activity determines whether worn or degraded parts are suitable for continued use until the next similar overhaul or repair period. The criteria shall explicitly state those measurable, wear or deterioration limits which, if exceeded, require replacement by new parts.

3.5.3.6 Receipt inspection of new or refurbished parts. Procedures shall be included for the critical inspection and review of new parts and of overhauled and repaired parts received from DOA/SOA activities (including their comparison with parts being replaced to establish equivalency before installation).

3.5.4 Chapter 4 - Reassembly and grooming. Paragraphs in this chapter shall:

(a) Provide all necessary reassembly instructions, including required hold points for quality inspection accomplishment as delineated by QATIPs. Where such instructions are given correctly in technical documentation they shall be referenced instead of repeating lengthy instructions in the TRS. Where critical examinations and tests are required to be performed during reassembly, the TRS shall so specify.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:22Z
Check the source to verify that this is the current version before use.

t pages unless otherwise ... If foldout pages may be prepared [4.2.4.1 (E)]. Will accept foldo

(b) Specify grooming which is required before or during post-overhaul tests. Grooming instructions given in technical manuals shall be referenced rather than repeated in the TRS. Typical examples of grooming are:

(1) Adjustment of relief bypass valves.
(2) Rotor balancing to reduce noise levels.
(3) Honing of valve seats to reduce leakage.
(4) Improving coupling alignment.

(c) Specify that, upon completion of grooming, the overhaul or repair activity will place suitable data on the body of the part which will provide in legible form the following information: part number, serial number (if applicable), overhaul or repair activity identification, and the date of overhaul or repair. These data may be engraved in prepared metal plates, printed on suitable decal material, or stenciled on the part depending upon the part dimensions, use environment, and material composition. Identification methods shall be included in the TRS for the applicable item.

3.5.5 Chapter 5 - Final acceptance tests. Paragraphs in this chapter shall:

(a) Specify the system, equipment, or component performance requirements.
(b) Specify the examinations and tests, including required test equipment and documentation, required to ensure that the item satisfies the above performance requirements.
(c) Specify hold points for quality inspection accomplishment as delineated by QATIPs.
(d) Specify the method of recording test data.

3.5.6 Chapter 6 - Facilities, equipment, and personnel requirements. This chapter shall note the special equipment, facilities, and personnel skills required to accomplish the equipment overhaul covered by the TRS.

3.5.6.1 Facility requirements. This paragraph shall contain a complete description of the minimum plant facilities and test beds required to accomplish the overhaul. Clean rooms and other unique requirements shall be designated when required. Care shall be taken not to over subscribe facility requirements. A summary of all utilities required such as air, water, power, steam, shall be provided.

3.5.6.2 Test equipment requirements. All the tools and test equipment required to accomplish the overhaul shall be listed in tabular form. Only tools and testing devices usually found at a well stocked repair facility may be designated unless specifically required. Equipment type, manufacturer, model number, and equivalency data and title of the test or procedural step to which it applies shall be identified (see MIL-M-24784).

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:22Z
Check the source to verify that this is the currentversion before use.

3.5.6.3 Test conditions. All test procedures and special requirements to verify the proper overhaul of the equipment shall be included. References may be made to applicable tests, procedures, and data for clarity. If special requirements such as clean rooms, positive pressure air flow, and so forth are imposed, they shall be highlighted in this section.

3.5.6.4 Personnel requirements. The number and minimum experience level of the technician who can be expected to perform the task shall be included. If special training, skill, or experience is required to accomplish a particular step, phase of operations, or testing, it shall be noted. This section shall also identify QA personnel requirements.

3.5.7 Chapter 7 - Preservation, packaging, handling, storage, and transportation requirements. This chapter shall identify the requirements for special preservation, storage, and transportation of the repairable items. For example, preservation for storage when the item is not to be installed for an extended period of time and the methods used for preservation and storage are critical. If there are no requirements for special preservation, storage, and transportation, the TRS shall so specify.

3.5.8 Chapter 8 - Overhaul and repair record requirements. The TRS shall require the recording of information during the overhaul process to:

(a) Provide a permanent record of the overhaul and repair test and inspection.
(b) Define items and areas requiring additional work.
(c) Provide data for future overhaul planning.
(d) Serve as a basis for determining the adequacy of the TRS for use on subsequent overhauls or refurbishments.
(e) Provide data for automated data processing (ADP) reporting systems as required.
(f) Serve as an information library which may be used in analyzing post-overhaul malfunctions.

3.5.8.1 Data record. Fulfillment of overhaul and repair record requirements shall be accomplished through preparation and completion of the traveller and inspection, discrepancy and repair report (TIDRR) in accordance with the example format, preparation and completion instructions shown on figure 9-2. The TIDRR shall serve a dual purpose, permanent record by directing the movement of the item being overhauled and repaired from receipt to issue status, and by providing for a record of inspections, discrepancies, and overhaul and repair actions accomplished during the overhaul process. The TIDRR shall be comprised of five sections traveller, inspection and discrepancy, planned overhaul and repair actions, examinations and tests, and remarks, that will require recording, as a minimum, data required of and derived from:

(a) Examinations.
(b) Tests.
(c) Corrective actions.
(d) Disassembly, reassembly and grooming.
(e) Overhaul and repair actions.
(f) Final acceptance tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

3.5.8.2 Traveler and inspection, discrepancy and repair report (TIDRR). The TRS originator shall provide the TIDRR data sheet form in the example format shown on figure 9-2, in quality suitable for reproduction. When completed, TIDRRs shall be retained by the overhaul and repair activity for review by the cognizant engineering agent and as a data source for repairables management program information requirements and ADP reporting systems input preparation.

3.5.9 Appendices. Appendices shall be used to separate relatively bulky information from the body of the TRS when such separation will increase the clarity of the overall TRS. When used, appendices shall be identified by capital letters (for example, (A), (B), and (C)). The following are examples of material which may be placed in appendices:

(a) Contingency material list (see 3.5.3.4).
(b) Planned overhaul and repair material list (see 3.5.3.3).
(c) Format for the TIDRR (see 3.5.8.2).

3.5.10 Enclosures. Enclosures may be used to include closely related material which is not an inherent part of the TRS. The enclosures, identified in full, shall be listed by numbers (for example, (1), (2), and (3)) in the order that they are mentioned in the text.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Quality control. Unless otherwise specified (see 6.2), the quality conformance inspection, Government inspection, validation, verification, technical manual quality assurance (TMQA) program reviews, technical manual evaluation records and rejection requirements shall be in accordance with MIL-M-24784.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. Unless otherwise specified (see 6.2), the packaging and preservation requirements for delivery of book plans, review draft copies, preliminary technical manuals, final reproducible copy, technical manuals, replenishment materials, changes and revisions shall be in accordance with MIL-M-24784.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The TRS supplements the technical maintenance section of the technical manual for the ordnance item and provides all necessary technical information required to rebuild or restore the ordnance item. Normal maintenance and test procedures covered in the technical manual for the item should not be repeated in the TRS except when deemed necessary for clarity or continuity. Instead, reference to the manual will be made.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification (or any TMCR referencing this specification).
(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).
(c) Applicable publication number, classification, and distribution statement (see 3.1).
(d) An outline or book plan must be specified whenever a technical manual is required for a new equipment or system (see 3.2a).
(e) Double column text shall normally be specified. When increased effectiveness of presentation results, a single column format is also acceptable.
(f) A review draft copy (RDC) must always be specified for every new technical manual (see 3.2b). An RDC also must be specified for manual change or revision procurements (see 3.2f and 3.2g), unless changes to the technical manual have been pre-approved (TMDER, ECP, and so forth) by the Government.
(g) Specify the number of weeks required for Government review of technical manual deliverables.
(h) Specify a preliminary technical manual when an extended period of use is required prior to Government verification (normally applies to complex equipment and systems only), see 3.2c.
(i) Final reproducible copy (see 3.2d).
(j) Supplements to manuals (see 3.2e) must be specified when:

(1) Classified information can be confined to the supplement manual such that its basic technical manual will be routed as "unclassified".

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:22Z
Check the source to verify that this is the current version before use.

(2) It augments a technical manual to provide for a different model and can be justified as a cost effective method of promulgation.
(3) It can be justified as a practical method of promulgation.

(k) Changes shall be specified only when they pertain to technical manual corrections resulting from a hardware change or modification. They may also be specified if it has been determined that significant omissions of technical data or information has been identified. Do not specify a change to correct minor or editorial corrections. When changes are justified on the above basis, the change package must include the correction of all outstanding temporary or interim changes and may include minor changes (see 3.2f). The change package must be developed in accordance with MIL-M-24784/1.
(l) Whenever the number of change pages is estimated to exceed approximately 25 percent of the total number of pages in the manual, an update revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(m) When the total number of pages requiring change exceed approximately 50 percent of the total number of pages in the manual, a complete revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(n) Engineering judgement records (see 3.2i).
(o) Cost and pricing data (see 3.2j).
(p) What quality assurance and management data items are to be delivered (see 3.2.3, 4.2, 6.4 and MIL-M-24784).

(1) TMQA program.
(2) Validation plan.
(3) Validation certification.
(4) Evaluation records.
(5) Verification plan.
(6) Verification incorporation certification.

(q) Specify if technical manual deliverables are to encoded in digital form for use in electronic printing and exchange of text.
(r) Requirements for corrective maintenance actions (see 3.5.2.3).
(s) Identification of inspection and repair of items covered in the TRS (see 3.5.2.5).
(t) Requirements for parts lists (see 3.5.3.3 and 3.5.3.4).
(u) When preservation, packing, and marking are other than as specified (see Section 5. PACKAGING).
(v) For classified equipment, attach a DD Form 254 specifying the following:

(1) Security classification.
(2) Downgrading and declassification notification.
(3) Areas requiring security protection.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:22Z
Check the source to verify that this is the currentversion before use.

6.3 Technical manual acquisition. This specification (or a TMCR based on this specification) must be listed on the Contract Data Requirements List (DD Form 1423) in order to acquire the technical manuals described by this specification, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

6.4 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title
3.2.3	DI-M-2194	Manual, Technical; Quality Assurance Program Plan
3.2.3	DI-M-2195	Manual, Technical; Validation Plan
3.2.3	DI-M-2196	Manual, Technical; Validation Certification
3.2.3	DI-M-2197	Manual, Technical, Evaluation Record
3.2.3	DI-M-2198	Manual, Technical; Verification Plan
3.2.3	DI-M-2201	Technical Manual Verification Incorporation Certification

The above DID's were those cleared as of the date of this specification. The current issue of DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.5 Definitions. The words or phrases used throughout this specification must be as defined in MIL-M-24784 and the following.

6.5.1 Critical procedures. Those procedures which:

(a) Are necessary to restore the equipment to performance specifications.
(b) If not accomplished, would prevent the equipment from operating between overhauls.
(c) Contain safety related or precautionary measures designed to minimize personal injury or equipment damage.

6.5.2 Final acceptance tests (FAT). The examination and testing of repairable items after completion of overhaul or repair to ensure that the items satisfy performance requirements.

6.5.3 Planned overhaul and repair maintenance. The minimum overhaul or repair maintenance required for an item covered by a TRS. This work is determined by such means as experience and engineering judgement. The purpose of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

requirement is to permit preplanning or repair to the maximum extent practicable to minimize potential failures before they develop into major defects or malfunctions.

6.5.4 Repairable item. An item of durable nature which, when unserviceable, normally can be economically restored to a serviceable condition through repair procedures performed by a Government or commercial overhaul facility.

6.5.5 Subassembly. A portion of an assembly or unit which is replaceable as a whole, but also has a part or parts which are individually replaceable. (The distinction between an assembly and a subassembly is determined by the individual application. An assembly in one instance may be a subassembly in another, where it forms a portion of an assembly.)

6.5.6 Work-unit or work-package concept. An individual unit of information containing all data necessary for a technician to perform a specific task with minimal referencing.

6.6 Subject term (key word listing).

Examination test and repair action record
Material condition and overhaul report
Material deficiency evaluation report
Technical manual identification number

Review activity:
Navy - EC

Preparing activity:
Navy - SH
(Project TMSS-N242-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

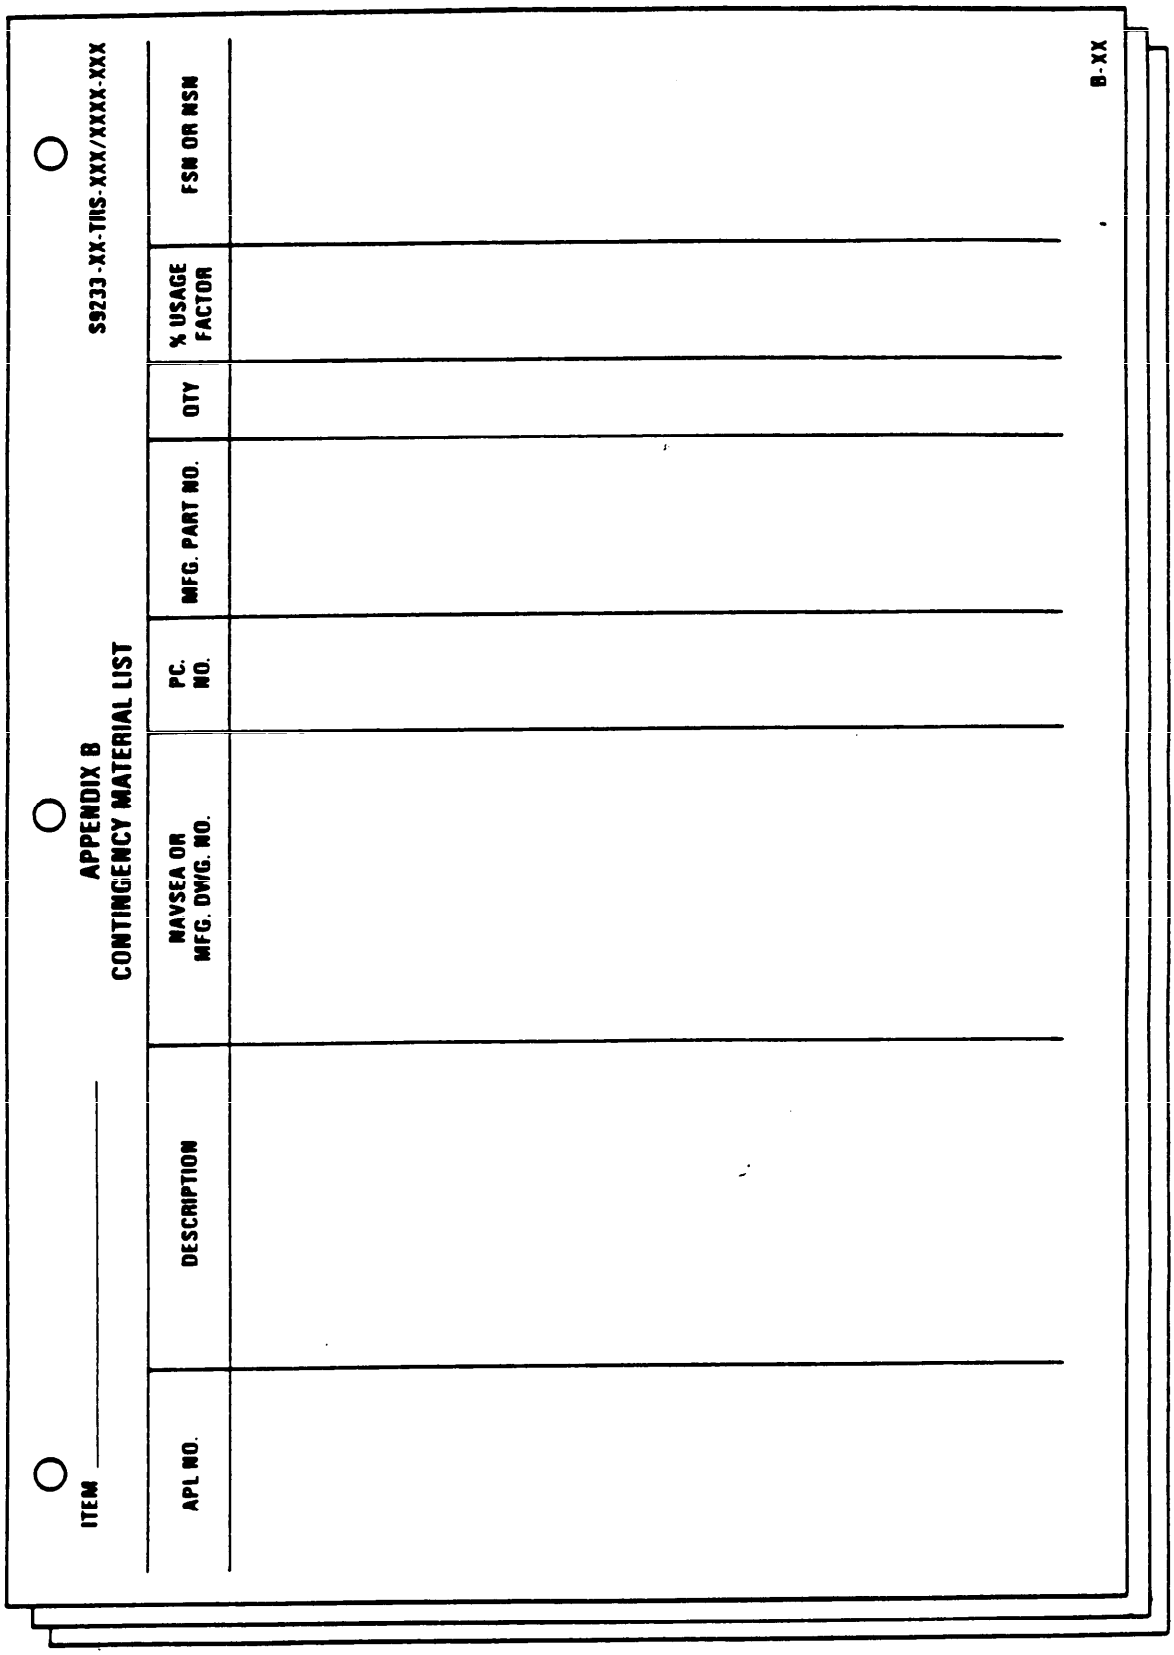


FIGURE 9-1. Contingency material list. (Example)

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:22Z
Check the source to verify that this is the current version before use.

TRS NO: SXXXX-XX-TRS-XXX / X-X-X

TRAVELER AND INSPECTION/DISCREPANCY/REPAIR REPORT (TIDRR)			
NOMENCLATURE	FSN	FINN/FSCM	PART NO.

SYSTEM TITLE	EQUIPMENT TITLE
JOB ORDER NUMBER:	TIDRR NO.

TIDRR PREP BY	CODE	DATE	TIDRR APPR BY	CODE	DATE

TRAVELER SECTION (T)

WORK SEQ	PROCESSING OPERATION	WORK CTR	SHOP CODE	SHOP SUPV	MAN-HOURS	QUAL ASSUR	DATE
	UNPACK						
	VISUAL INSPECTION						
	RECEIVING TEST/EXAM.						
	DISASSEMBLY						
	PLANNED OVERHAUL/REPAIR						
	IN-PROCESS TESTS						
	CORRECTIVE ACTION						
	ASSEMBLY						
	PERFORMANCE TESTS						
	GROOM/PAINT						
	MARK/IDENTIFICATION						
	ACCEPTANCE TEST						
	CLAIBRATE						
	TOUCH-UP						
	VISUAL CHECKS						
	FINAL ACCEPTANCE TEST						
	PACKING PACKAGING						


PROCESSING		TIDRR REVIEW			
START	COMPLETE	SUPERVISOR	CODE	QUAL ASSURANCE	CODE

PART 1. TRAVELER SECTION (T)

APPENDIX A
PAGE OF

FIGURE 9-2. Traveler and inspection/discrepancy/repair report (TIDRR). (Sheet 1 of 5)

Source: https://assist.dla.mil -- Downloaded: 20261-20T02:22Z
Check the source to verify that this is the current version before use.

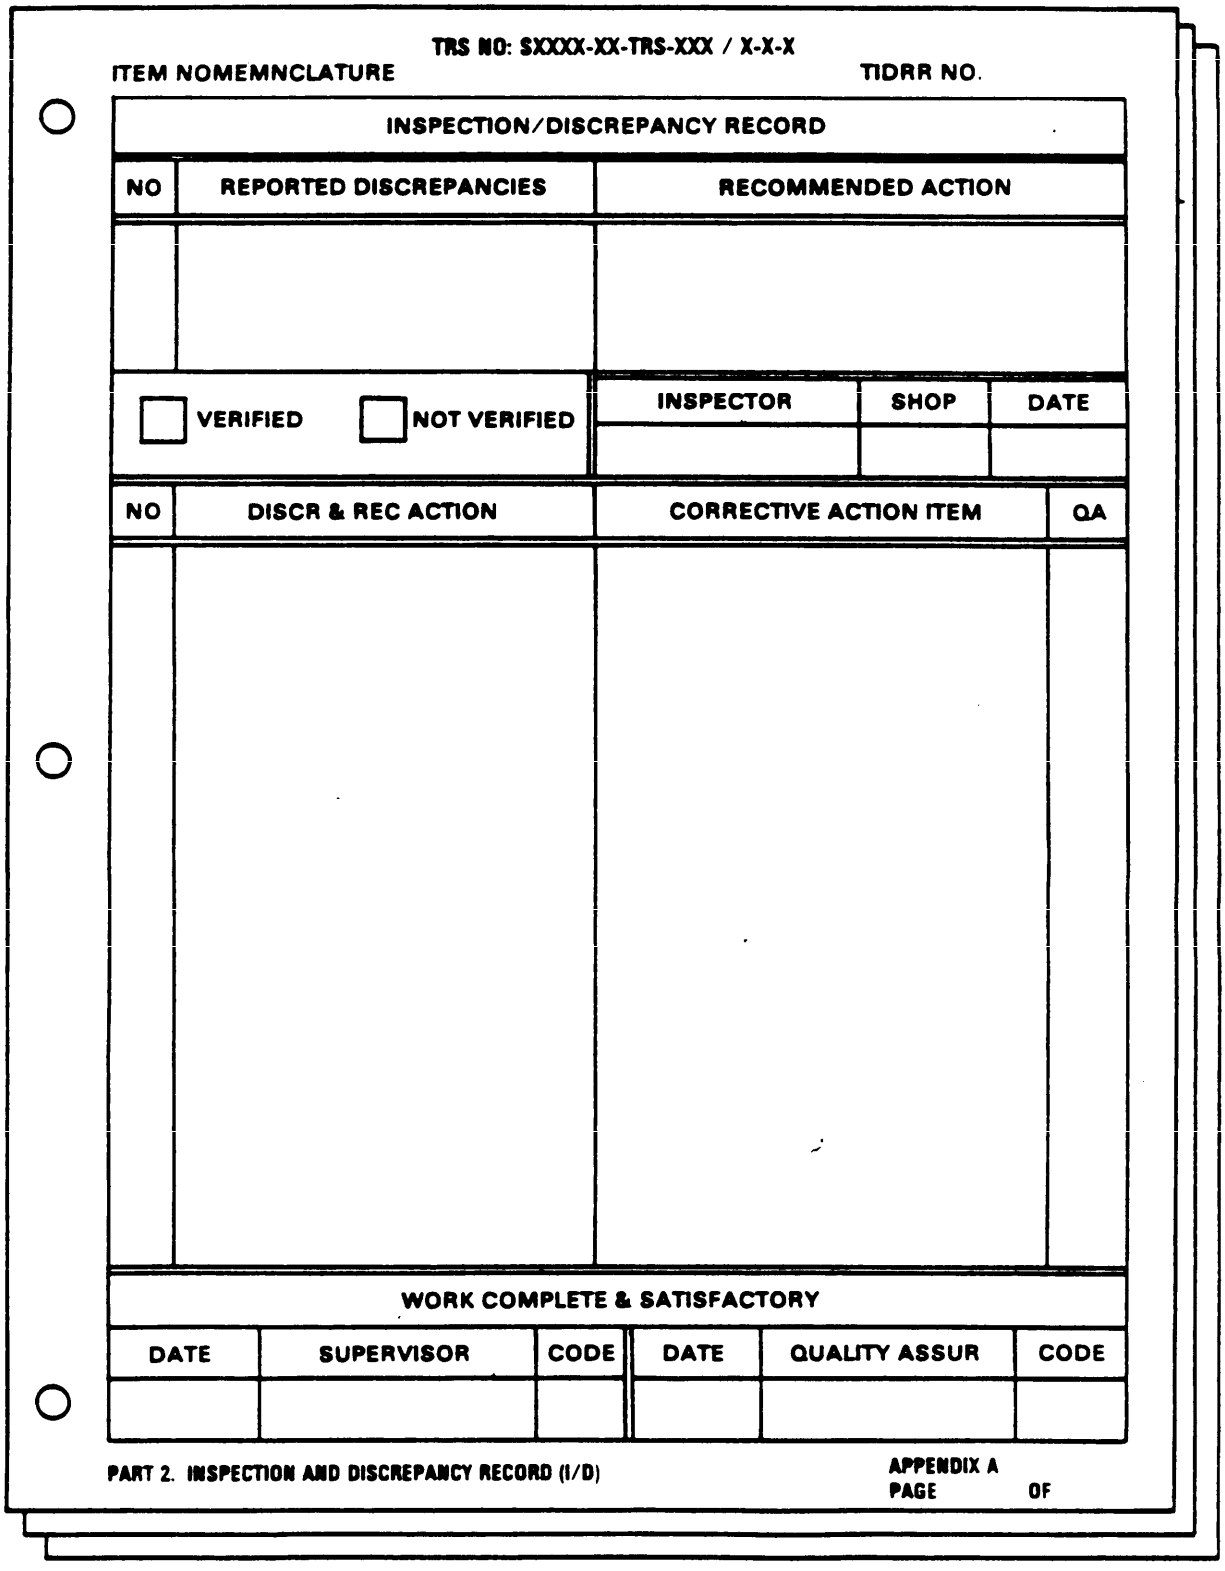

TRS NO: SXXXX-XX-TRS-XXX / X-X-X

ITEM NOMEMNCLATURE TIDRR NO.

INSPECTION/DISCREPANCY RECORD

NO	REPORTED DISCREPANCIES	RECOMMENDED ACTION

☐ VERIFIED ☐ NOT VERIFIED

INSPECTOR	SHOP	DATE

NO	DISCR & REC ACTION	CORRECTIVE ACTION ITEM	QA

WORK COMPLETE & SATISFACTORY


DATE	SUPERVISOR	CODE	DATE	QUALITY ASSUR	CODE

PART 2. INSPECTION AND DISCREPANCY RECORD (I/D)

APPENDIX A
PAGE OF

FIGURE 9-2. Traveler and inspection/discrepancy/repair report (TIDRR). (Sheet 2 of 5)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:22Z
Check the source to verify that this is the currentversion before use.

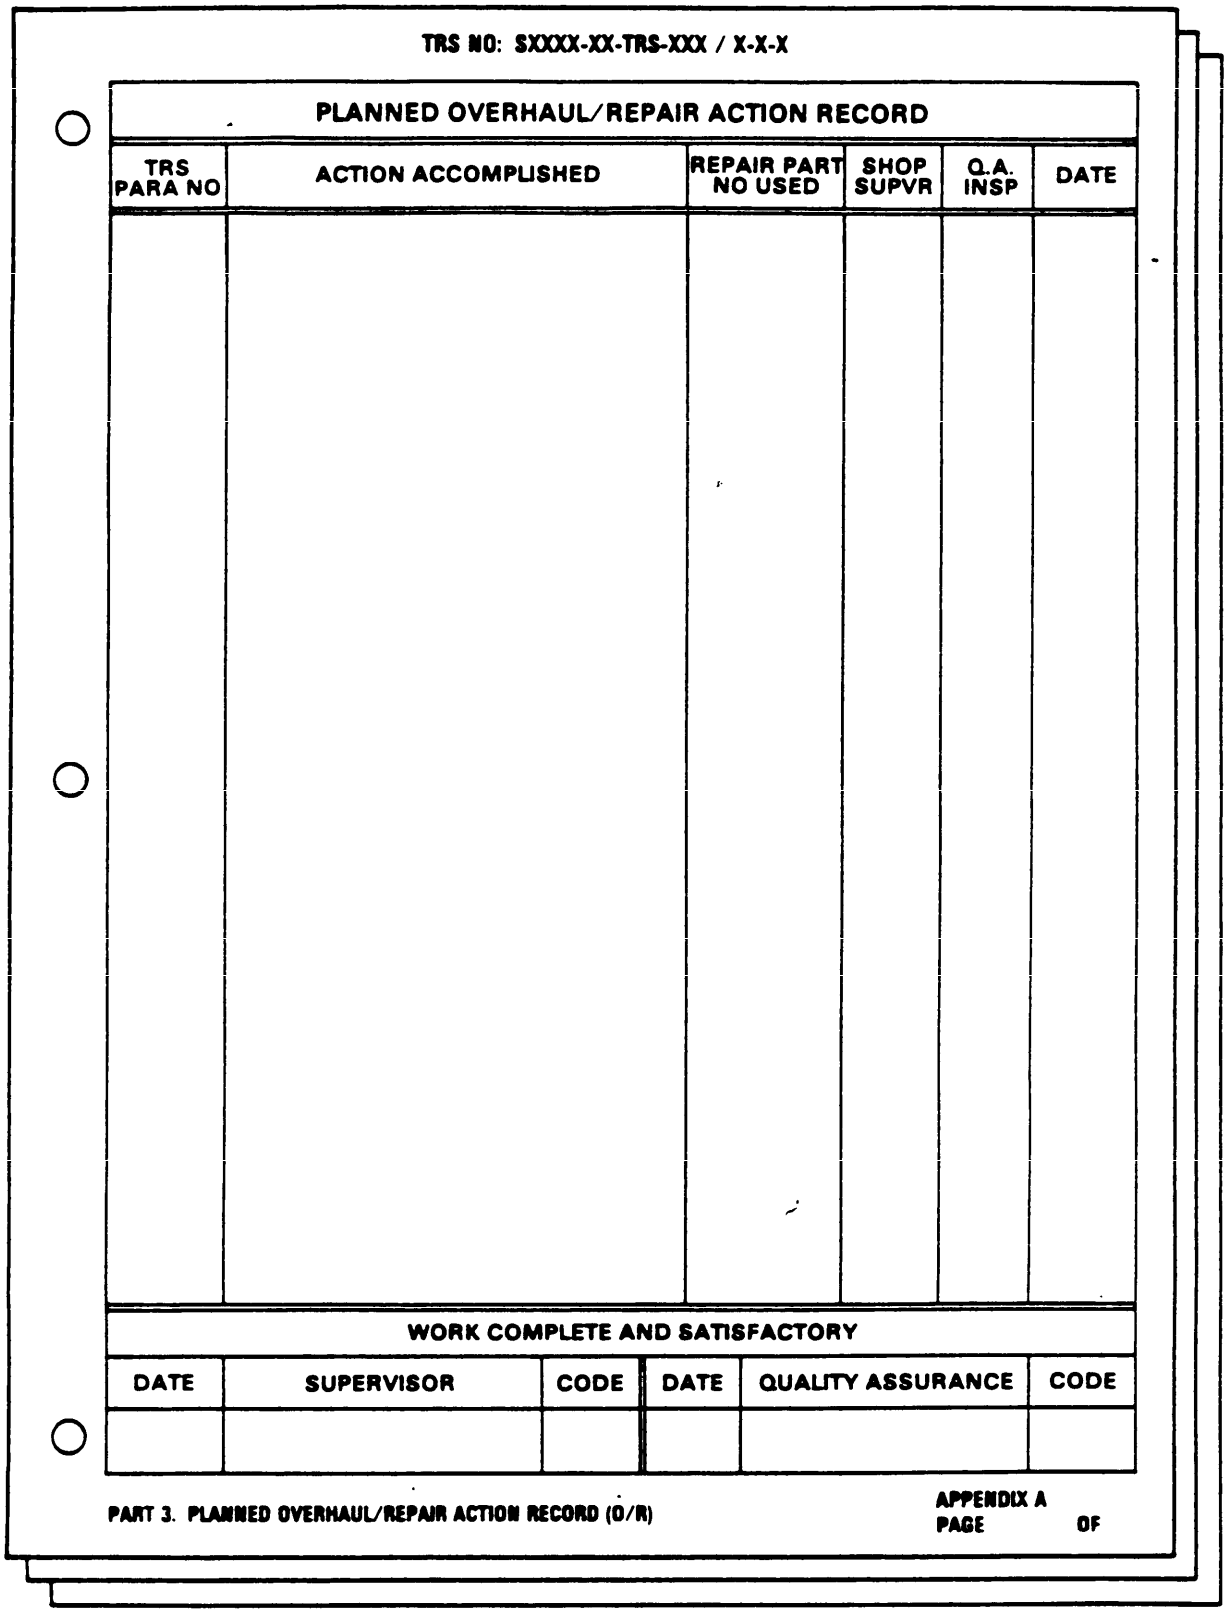

TRS NO: SXXXX-XX-TRS-XXX / X-X-X

PLANNED OVERHAUL/REPAIR ACTION RECORD

TRS PARA NO	ACTION ACCOMPLISHED	REPAIR PART NO USED	SHOP SUPVR	Q.A. INSP	DATE

WORK COMPLETE AND SATISFACTORY


DATE	SUPERVISOR	CODE	DATE	QUALITY ASSURANCE	CODE

PART 3. PLANNED OVERHAUL/REPAIR ACTION RECORD (O/R)

APPENDIX A
PAGE OF

FIGURE 9-2. Traveler and inspection/discrepancy/repair report (TIDRR). (Sheet 3 of 5)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:22Z
Check the source to verify that this is the current version before use.

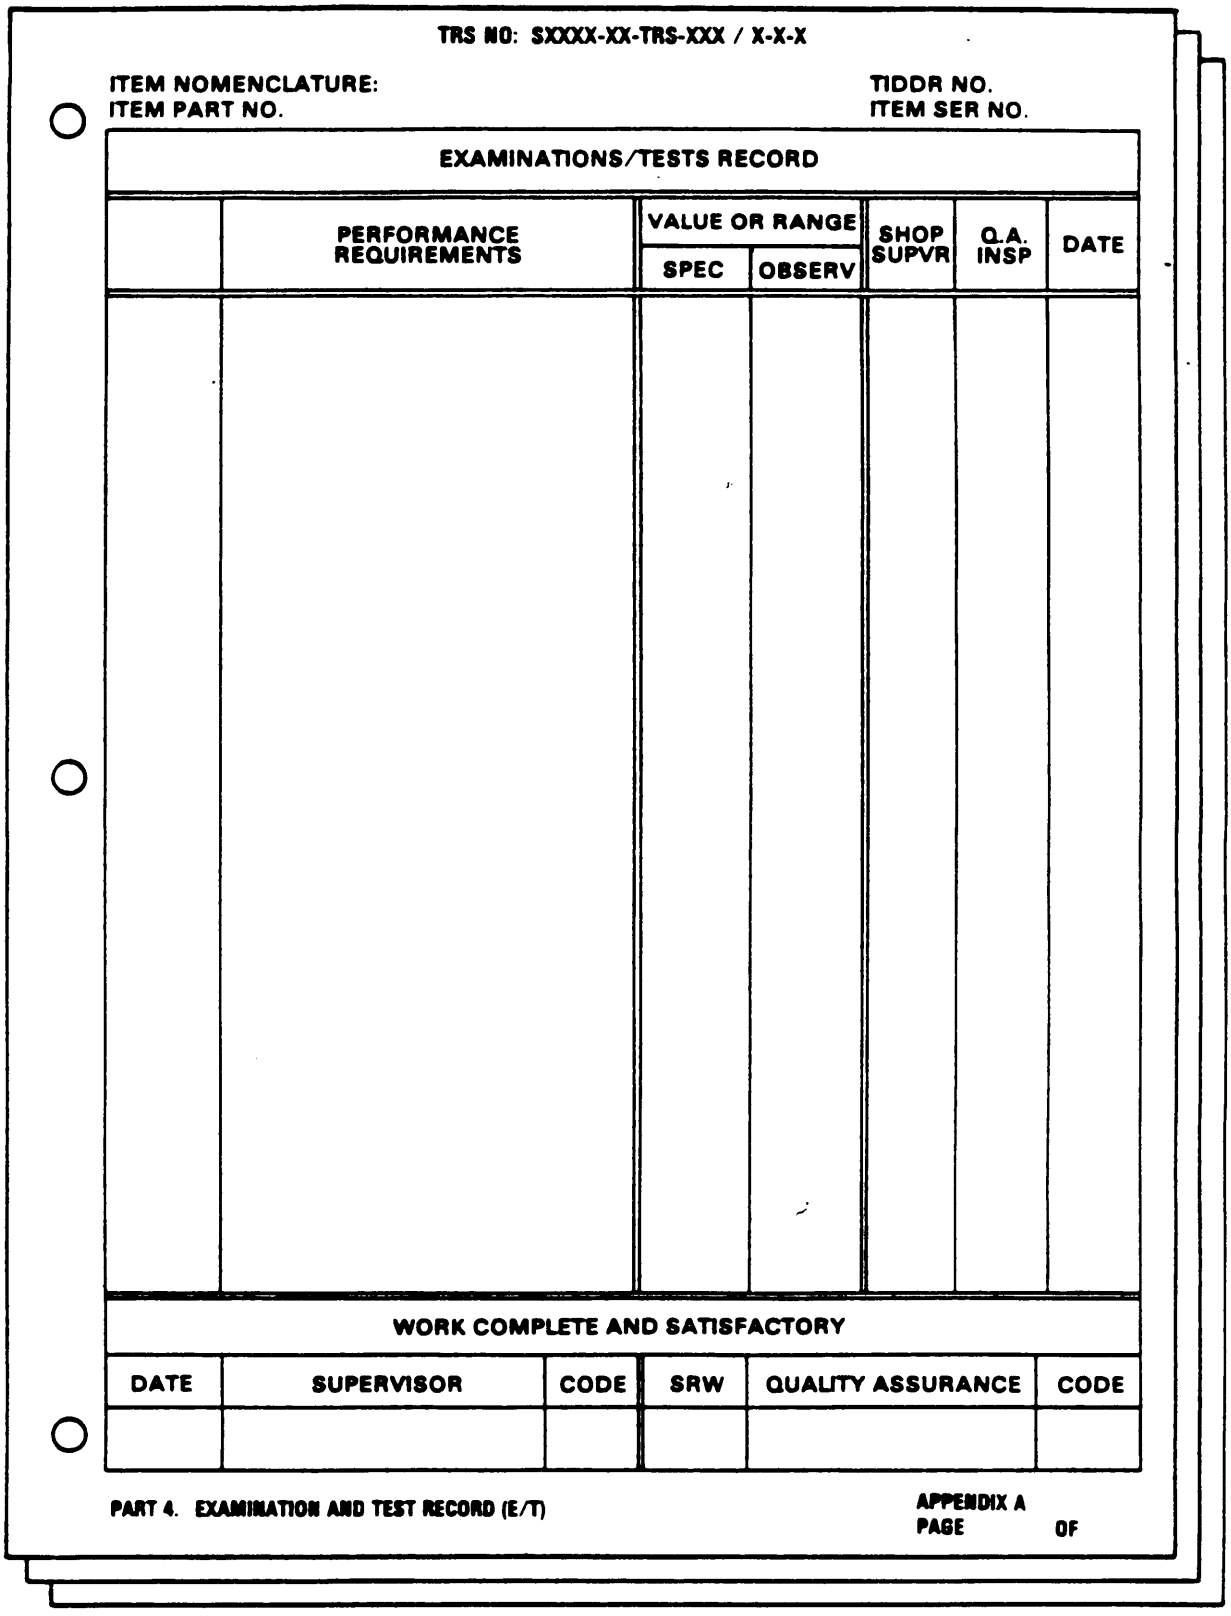

TRS NO: SXXXX-XX-TRS-XXX / X-X-X

ITEM NOMENCLATURE:
ITEM PART NO.

TIDDR NO.
ITEM SER NO.

EXAMINATIONS/TESTS RECORD

	PERFORMANCE REQUIREMENTS	VALUE OR RANGE		SHOP SUPVR	Q.A. INSP	DATE
		SPEC	OBSERV			

WORK COMPLETE AND SATISFACTORY

DATE	SUPERVISOR	CODE	SRW	QUALITY ASSURANCE	CODE

PART 4. EXAMINATION AND TEST RECORD (E/T)

APPENDIX A
PAGE OF

FIGURE 9-2. Traveler and inspection/discrepancy/repair report (TIDRR). (Sheet 4 of 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

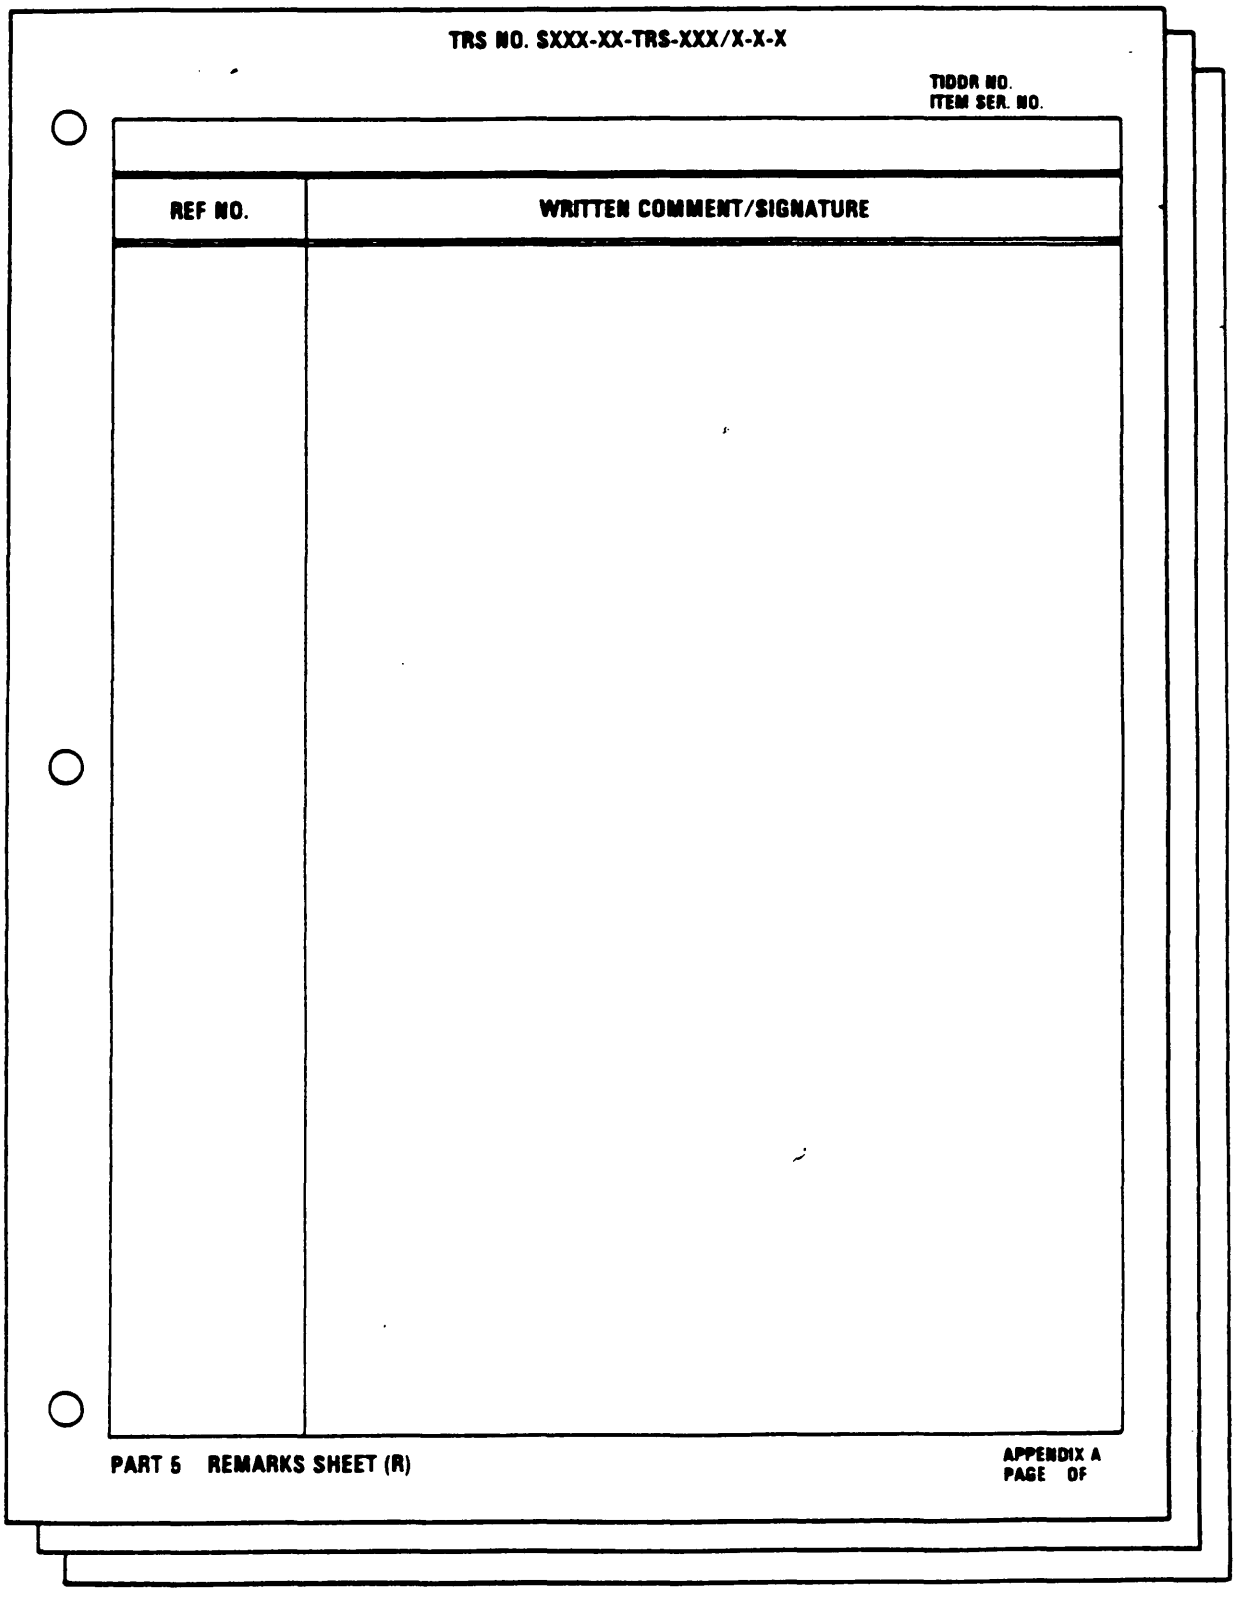


FIGURE 9-2. Traveler and inspection/discrepancy/repair report (TIDRR). (Sheet 5 of 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-M-24784/9(SH)	2. DOCUMENT DATE (YYMMDD) 940906

3. DOCUMENT TITLE
MANUAL, TECHNICAL REPAIR STANDARDS (TRS) REQUIREMENTS FOR ORDNANCE EQUIPMENT

4. NATURE OF CHANGE (identity paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

A. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

A. NAME Technical Point of Contact (TPOC) MR. MICKEY ANDER, SEA 04TD3 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: DSN: TPOC: 703-602-8701 8-332-8701
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03R42 2531 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 202640-20T02:22Z
Check the source to verify that this is the current version before use.