INCH POUNDS

MS27566H
15 November 2000
SUPERSEDING
MS27566G
07 July 2000

DETAILED SPECIFICATION SHEET

CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE

This document remains Inactive for New Design

This specification is approved for use by all Departments and Agencies of the Department of Defense.

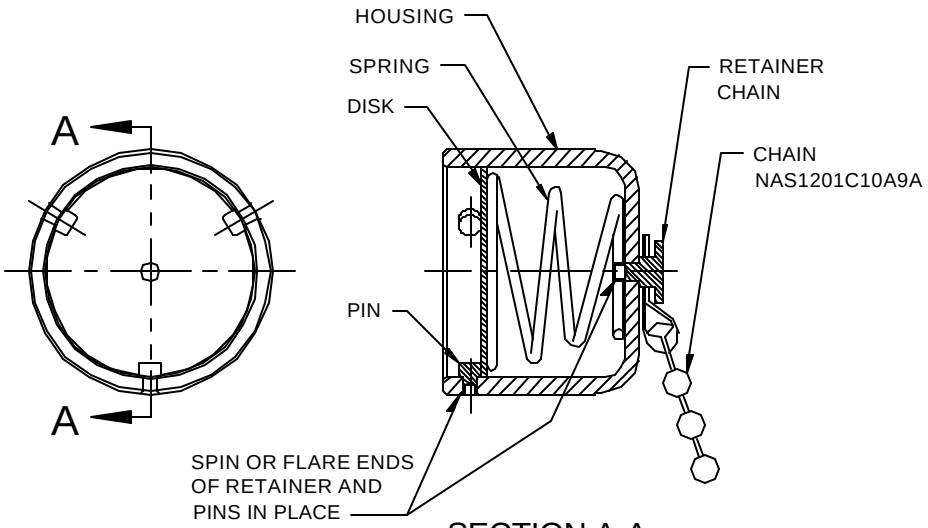

SECTION A-A

CAP ASSEMBLY
MS27566-1

MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

REMOVE BURRS AND BREAK SHARP EDGES .005 MAX.

DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMALS ±.010

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

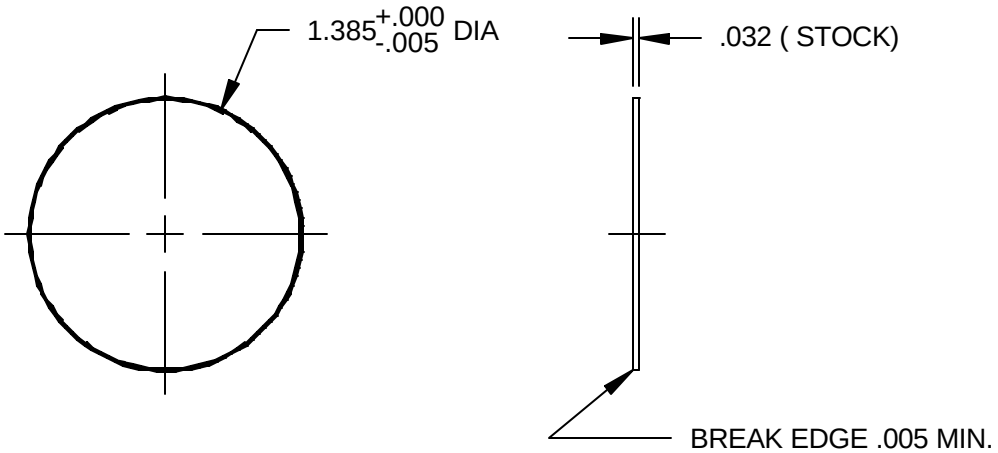

DISK

MATERIAL: SAE UNIFIED NUMBERING SYSTEM, S30200, PASSIVATE PER MIL-S-5002.
ALTERNATE MATERIAL: S30400.
ALL SURFACES TO BE 32 MIN. PER ANSI B46.1

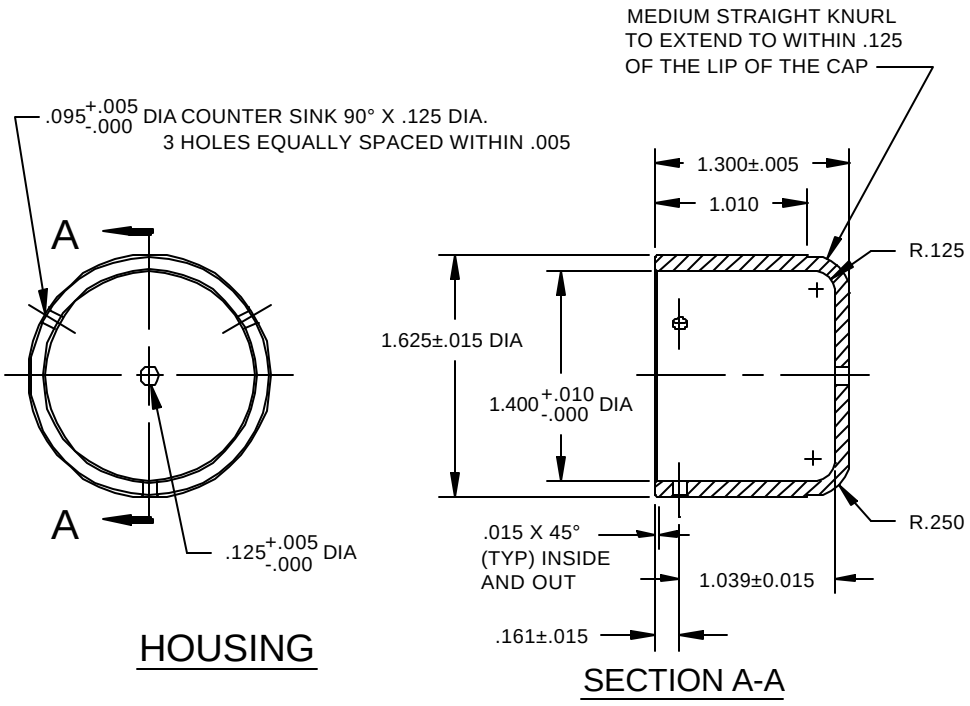

HOUSING

SECTION A-A

MATERIAL: ASTM B211: ALLOY 2024-T4 OR T351 TEMPER
ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR BLACK
1.625 DIA. NOMINAL APPLIES BEFORE KNURLING
FINISH: ALL SURFACES 32 MIN. PER ANSI B46.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

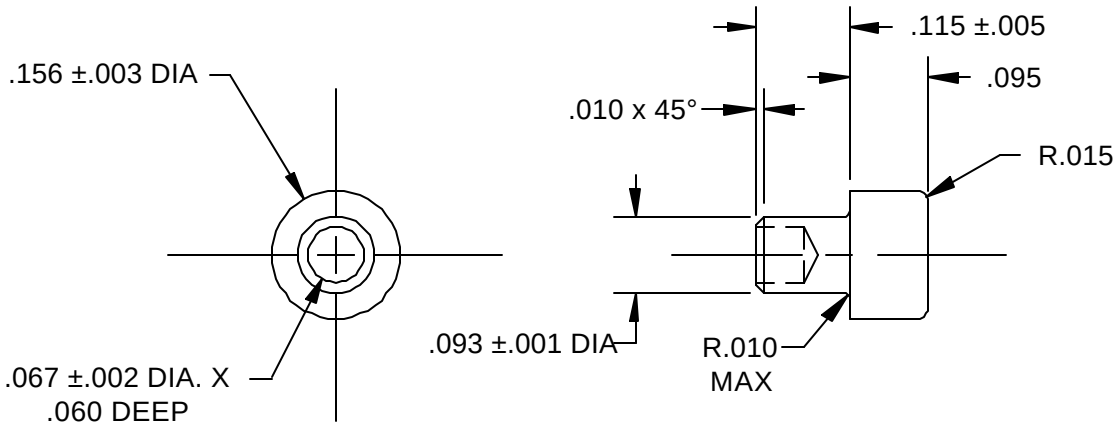

PIN

MATERIAL: S30300 PASSIVATE PER MIL-S-5002
FINISH: 32 ALL OVER PER ANSI B46.1

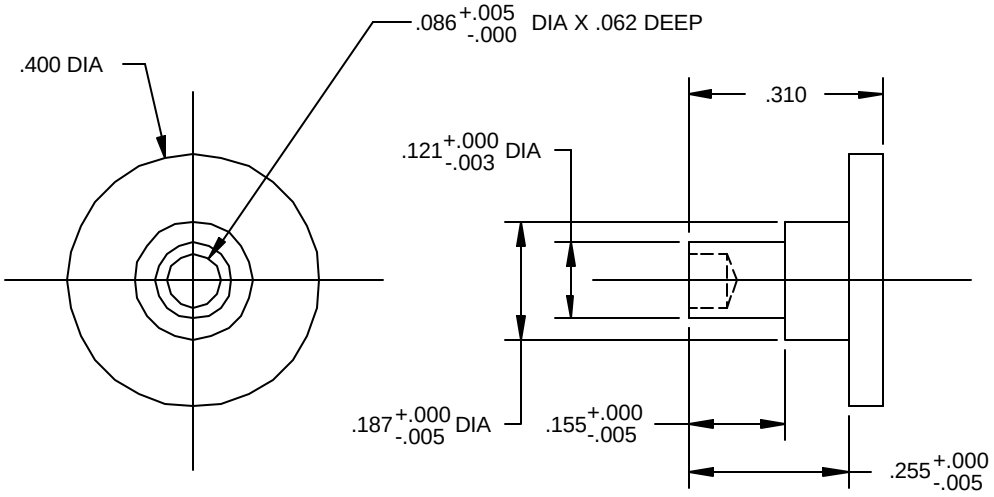

RETAINER-CHAIN

MATERIAL: ASTM B209: ALLOY 6061-T4 OR T6
ALTERNATE MATERIAL: ASTM B209: ALLOY 2024-T351
ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR BLACK
FINISH: 32 MIN. ALL OVER PER ANSI B46.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

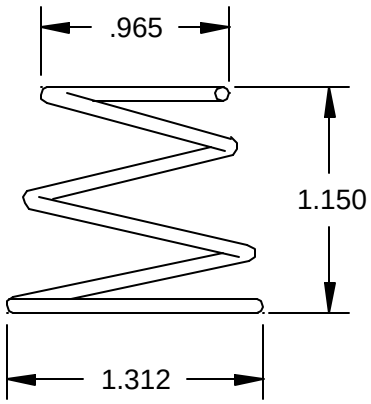

SPRING

MATERIAL: S30200 DIA. OPTIONAL, .058 ±.002 RECOMMENDED, PASSIVATE PER MIL-S-5002.
TOTAL COILS: 3
TOTAL COMPRESSED HEIGHT: .058 NOMINAL
SPRING RATE: 10.3 LBS./IN. TO SUPPORT 7 LBS. @ .300 HEIGHT.
END TO BE SQUARED.

Custodian:
Air Force – 99
Navy – AS

Preparing activity:
Air Force – 71

Review activity:
Air Force – 11

Agent activity:
Air Force – 99

(Project: 1660-0819)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MS27566G	**2. DOCUMENT DATE** *(YYYYMMDD)* 20001115

3. DOCUMENT TITLE
CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include ZIP Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	**7. DATE SUBMITTED** *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME DENISE A. SIKES	b. TELEPHONE *(Include Area Code)* (1) Commercial (405)736-2785 (2) DSN 336-2785
c. ADDRESS *(Include ZIP Code)* OC-ALC/TICLA 3001 Staff Drive, Tinker AFB, OK 73145-5990	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.