MILITARY SPECIFICATION SHEET

Ⓐ CONNECTOR ACCESSORIES, ELECTRICAL, RING,
POTTING BOOT, CATEGORY 5
(FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

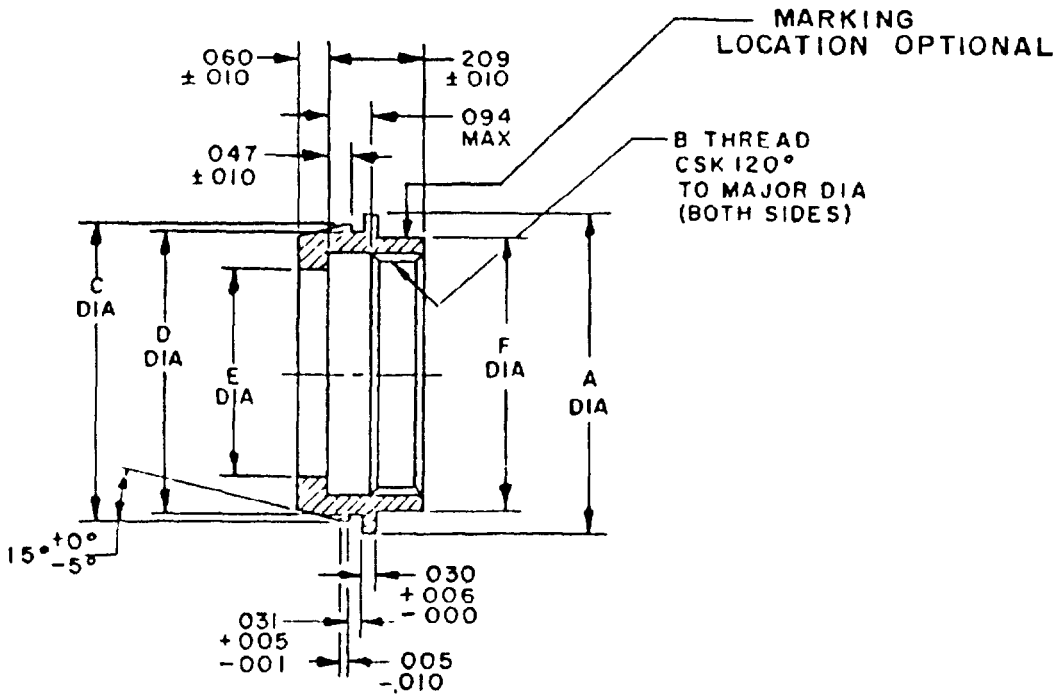


FIGURE 1 Dimensions and configuration

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:13Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	875	22 23
002	05	892	22 66
003	08	915	23 24
005	13	942	23 93
006	15	976	24 79
010	25	1 000	25 40
030	76	1 005	25 53
031	79	1 033	26 24
047	1 19	1 067	27 10
060	1.52	1 102	27 99
094	2 39	1 125	28 58
209	5 31	1 126	28 60
344	8 74	1 157	29 39
472	11 99	1 192	30 28
500	12 70	1 226	31 14
518	13 16	1 250	31 75
541	13 74	1 251	31 78
586	14 88	1 282	32 56
600	15 24	1 317	33 45
625	15 88	1 352	34 34
643	16 33	1 375	34 93
666	16 92	1 376	34 95
711	18.06	1.407	35 74
726	18 44	1 476	37 49
750	19 05	1 500	38 10
767	19 48	1 501	38 13
790	20 07	1 532	38 91
836	21 23	1 602	40 69
.850	21 59		

Ⓐ

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Dimensions apply after plating

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Ⓐ Dimensions and configuration See figure 1 and table I.

Ⓐ Material Aluminum alloy in accordance with MIL-C-85049.

Ⓐ Finish W in accordance with MIL-C-85049.

Ⓐ TABLE I. Shell size and dimensions.

Accessory shell size	Fits connector shell size		A maximum diameter	B thread UNEF class 2B	C +.001 -.005 diameter	D +.003 -.002 diameter	E ±.005 diameter	F +.006 -.005 diameter
	Series II	Series I						
8	8	9	.600	.4375-28	.541	.518	.344	.500
10	10	11	.726	.5625-24	.666	.643	.472	.625
12	12	13	.850	.6875-24	.790	.767	.586	.750
14	14	15	.976	.8125-20	.915	.892	.711	.875
16	16	17	1.102	.9375-20	1.033	1.005	.836	1.000
18	18	19	1.226	1.0625-18	1.157	1.126	.942	1.125
20	20	21	1.352	1.1875-18	1.282	1.251	1.067	1.250
22	22	23	1.476	1.3125-18	1.407	1.376	1.192	1.375
24	24	25	1.602	1.4375-18	1.532	1.501	1.317	1.500

Part number See example below.

M85049/ 58 - 10

Military designator

Specification sheet

Ⓐ Accessory shell size (see table I)

Application For use with MIL-C-85049/75 potting boots.

Qualification See MIL-C-85049, category 5.

Ⓐ QPL evaluating activity. Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:13Z
Check the source to verify that this is the current version before use.

Ⓐ Supersession data



Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3377-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.