INCH-POUND

MIL-DTL-27434/8A
w/AMENDMENT 1
3 June 2022
SUPERSEDING
MIL-DTL-27434/8A
22 May 2008


DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, SERIES HN to SERIES LC TYPE UG-259 A/U

Inactive for new design after 19 February 1982

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

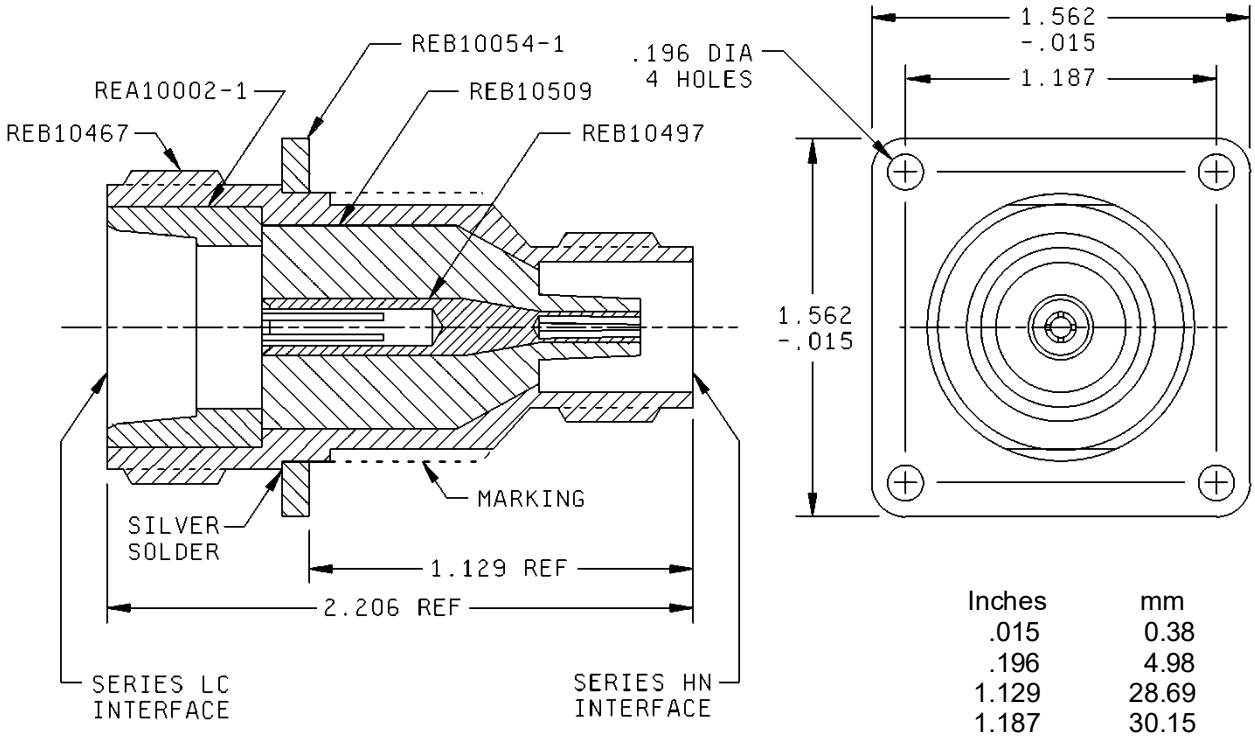

Inches	mm
.015	0.38
.196	4.98
1.129	28.69
1.187	30.15
1.562	39.67
2.206	56.03

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified dimensional tolerances are ±.005 inches.

FIGURE 1. Type UG – 259A/U connector adapter.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:52Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Impedance: 50 ohms, nominal.

Frequency range: 0 to 1 GHz.

Voltage rating: 1,500 V rms, maximum at sea level.
375 V rms, maximum at 70,000 feet.

Temperature rating: -65º C to +165º C.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating characteristics: Series HN socket contact in accordance with MIL-STD-348, and LC socket contact interface shall be in accordance with MIL-DTL-27434 after assembly.

Dielectric withstanding voltage: MIL-STD-202-301, 5,000 V rms minimum at sea level.

Corrosion: Applicable.

Vibration: Applicable.

Shock: Applicable.

Part or Identifying Number (PIN): UG-259 A/U.

Supersession: This document supersedes Navy drawing REB 49204.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents: In addition to MIL-DTL-27434, this document references the following:

MIL-STD-202-301
MIL-STD-348
REB10467
REB10497
REB10509

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-085)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:52Z
Check the source to verify that this is the current version before use.