A-A-2532
January 15, 1987

COMMERCIAL ITEM DESCRIPTION

BEVELS, SLIDING T


The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-B-211.

This commercial item description covers one size bevel assigned National Stock Number (NSN) 5210-00-278-0645 used by machinists and carpenters for measuring and transferring angles in layout work.

Salient characteristics:

Bevel shall consist of a blade and handle with a locking device to hold the blade in any position relative to the handle.
The handle shall be of straight grained hardwood or plastic, bound at each end with securely fastened metallic tips.
Wood handle shall be smoothly finished and treated to resist absorption of moisture.
Blade shall be blued, nickel plated, or stainless and shall have a minimum hardness of 90 on the Rockwell B scale.

Design and dimensions. The bevel shall be of the following design and dimensions:

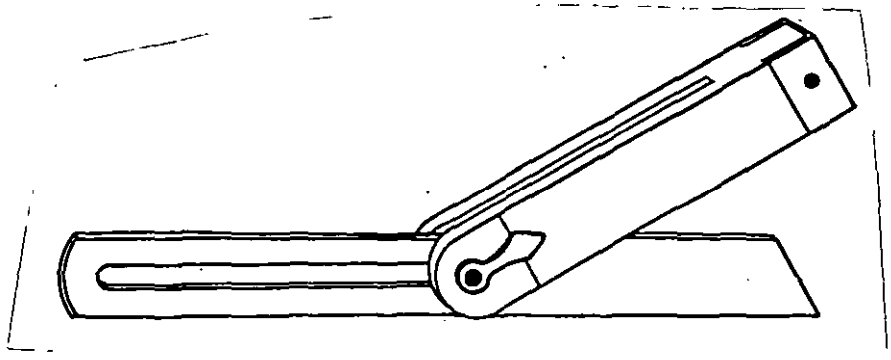

Blade: Length - 8 inches ± 1/4 inch
Width - 1 inch ± 1/16 inch
Thickness - 0.050 inch ± 0.005 inch

Handle: Length - 5-9/16 inches ± 1/8 inch
Width - 1 inch ± 1/16 inch
Thickness - 23/32 inch ± 1/16 inch

Workmanship. Sharp fins shall be removed from all edges. All surfaces used for layout work shall be straight and smooth. Metallic tips shall be fitted flush with the surfaces upon which they are fastened.

Marking. Each bevel shall be marked in a plain and permanent manner with the manufacturer's name or identifying symbol, part number, and country of origin.

Quality assurance provisions.

Inspection. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all bevels offered for acceptance at one time. The sample unit is one bevel.

FSC 5210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

Examination for visual and dimensional requirements. Each bevel shall be examined for workmanship, marking, and dimensional requirements. The inspection level shall be Inspection Level I with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Testing for blade hardness. Each bevel shall be examined for blade hardness with a Special Inspection Level of S-3 with an AQL of 4.0 defects per hundred units.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing supplier's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order. (For use by GSA; optional for other agencies.) DoD may use Commercial Packaging, Standard ASTM D3951.

NOTES:

The issue of MIL-STD-105 and ASTM D3951 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Military Standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

ASTM Standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

MILITARY INTERESTS:

Custodian

Air Force - 99

Review Activity

Air Force - 84

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.