MIL-F-3315B(ME)
30 January 1970
SUPERSEDING
MIL-F-3315A(CE)
10 October 1957

MILITARY SPECIFICATION

FERRY CONVERSION SET, RAFT: INFANTRY

SUPPORT, PACKAGING OF

1. SCOPE

1.1 This specification covers the requirements for the preservation, packaging, packing, and marking for a Ferry Conversion Set, Raft: Infantry Support (SC 5420-93-CL-E05).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

QQ-S-781	- Steel, Strapping, Flat.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-F-320	- Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-60	- Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.

Military

MIL-C-104	- Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.

FSC 5420

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 First article.

3.1.1 Preproduction pack. The supplier shall furnish a preproduction pack within the time frame specified, to prove, prior to starting production packaging and packing, that the applied preservation, packaging, packing, and marking comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

3.2 Materials. Materials shall be as specified herein and in applicable specifications. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification. Materials shall be free of defects.

3.3 Preservation and packaging. Preservation and packaging shall be level A or C, as specified.

3.3.1 Level A.

3.3.1.1 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed in, and shall be applied in accordance with MIL-P-116.

3.3.1.2 Unprotected surfaces. Unprotected and unpainted metal surfaces, of the tackle blocks, cable grips, threads of wire rope clips, bicycle traveler, and hold fast assemblies, requiring the application of a contact preservative in accordance with MIL-P-116, shall be coated with type P-1 preservative.

3.3.1.3 Hoist. The hoist chain shall be coated with enough type P-3 or type P-9 preservative to insure penetration of the preservative to the inner surfaces of the rollers, pins, and bushings. Excess preservative shall be drained. The chain shall be coiled or hanked to the minimum dimensions and the chain then wrapped with greaseproof barrier material conforming to MIL-B-121, type I, grade C, class 1, and the wrap secured with tape conforming to PPP-T-60, type III, class optional.

3.3.1.4 Manila rope. Each coil of manila rope shall be secured with not less than 4 ties of cotton tape or twine, evenly spaced, to prevent the coil from unwinding.

3.3.1.5 Wire rope. Wire rope shall be wound on wood reels. The ends of the rope shall be secured to the reels to prevent the rope from unwinding.

3.3.1.6 Wrenches. Wrenches shall be coated with a thin film of type P-7 preservative and each wrench shall be preserved in accordance with MIL-P-116, method IC-1.

3.3.1.7 Sledge hammers. Unpainted metal surfaces of the hammer heads shall be coated with type P-1 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

3.3.1.8 Consolidated packaging. The tackle blocks, wire-rope clips, cable grips, chain hoists, bicycle traveler, wrenches, and the hammers shall be consolidated packaged in the chest furnished. Cushioning and blocking shall be provided in a manner to immobolize the items within the chest. The chest lid shall be closed and secured.

3.3.2 Level C. The components of the set shall be preserved and packaged to afford protection against corrosion, deterioration and physical damage from the supplier to the initial destination. Items that will fit into the chest shall be consolidated packaged as specified in 3.3.1.8, for level A.

3.4 Packing. Packing shall be level A or C, as specified.

3.4.1 Level A. Packing shall be in accordance with table II, and figures 1, 2, and 3.

3.4.2 Level C. The components of the set, preserved and packaged as specified in 3.3, shall be packed or prepared for shipment in a manner to assure carrier acceptance and safe delivery to destination at the lowest ratings of the carrier, and as a minimum shall be in compliance with Uniform Freight Classification rules or with National Motor Freight Classification rules.

3.5 Marking. In addition to any special marking required by the contract or order, items, packages, reels, coils, and shipping containers shall be marked in accordance with MIL-STD-129.

3.6 Workmanship. Workmanship shall be such as to provide maximum protection to the set components, by application of the procedures specified herein, against corrosion, deterioration and physical damage during handling, shipment and storage.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

4.1.1 Material inspection. The supplier is responsible for insuring that supplies and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction pack inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction pack inspection.

4.3.1 Examination. The preproduction pack shall be examined for the defects listed in 4.4.4. Presence of one or more defects shall be cause for rejection of the preproduction pack.

4.4 Quality conformance inspection.

4.4.1 Inspection stages. Inspection shall be in three stages as follows:

(a) The first stage shall include inspection of procedures, methods, materials, containers, and packaging marking, prior to placing the packages into consolidated containers.
(b) The second stage shall include inspection of closure and marking of consolidated containers, and the arrangement and blocking and bracing of consolidated containers in the shipping container.
(c) The third stage shall include inspection of the closed, strapped, and marked shipping containers prepared for shipment.

4.4.2 Unit of product. For the purpose of inspection, all packages or packs, prepared for any applicable stage that will comprise a complete pack, shall be considered a unit of product.

4.4.3 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.4 Examination. Samples selected in accordance with 4.4.3 shall be examined for the defects marked "X" for the applicable level in table I. Acceptable quality level (AQL) shall be 2.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

Table I. Classification of Defects

No.	Defect	Level A	Level C
101.	Materials, methods, and containers not as specified. Each incorrect material, method, and container shall constitute one defect (3.2, 3.3, 3.4).	X	X
102.	Unprotected surfaces not coated with preservative as specified (3.3.1.2).	X	-
103.	Hoist chain not coated with preservatives, the excess preservatives not drained, the chain not coiled and wrapped, and the wrap not secured with tape as specified (3.3.1.3).	X	-
104.	Coils of manila rope not secured as specified (3.3.1.4).	X	-
105.	Ends of the wire rope not secured to the reel as specified (3.3.1.5).	X	-
106.	Wrenches and hammer heads not coated with preservative as specified (3.3.1.6, 3.3.1.7).	X	-
107.	Consolidated packaging not as specified (3.3.1.8).	X	-
108.	Packing not in accordance with table II and applicable figures for level A. Each deviation from table II or the figures shall constitute one defect (3.4.1).	X	-
109.	Marking illegible, incomplete, or incorrect (3.5).	X	X

5. PREPARATION FOR DELIVERY

(Not applicable to this specification.)

6. NOTES

6.1 Intended use. This specification is intended to be used for direct reference in contracts or orders for the preservation, packaging, packing, and marking of a Ferry Conversion Set, Raft: Infantry Support (FSN 5420-272-9267).

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction pack (see 3.1.1).
(c) Level of preservation and packaging, and level of packing required (see 3.3 and 3.4).
(d) Any special marking required (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

6.3 Preproauction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the set components in accordance with this specification.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 5420-A152

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

TABLE II.
PRESERVATION, PACKAGING AND PACKING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A
1	BLOCKING.	LUMBER (CUT TO FIT)	4
2	BLOCKING	LUMBER, 1 X 4 NOMINAL	4
3	BLOCKING	LUMBER, 1 X 4 NOMINAL	2
4	BLOCKING	LUMBER, 2 X 4 NOMINAL	2
5	BLOCKING	LUMBER, 2 X 2 NOMINAL	2
6	PPP-B-601, DOMESTIC TYPE, STYLE I	BOX, CLEATED PLYWOOD	4
7	QQ-S-781, TYPE IV, CLASS A	STEEL STRAPPING, FLAT .035 X 3/4	AR
8	PPP-F-320, TYPE SF, GRADE PS400	FIBERBOARD	AR
9	MIL-C-104, TYPE I, CLASS 2, STYLE a	CRATE, PLYWOOD	1
10	CLIPS	METAL HOLDOWN	8

NOTE:
1. FIND NO. 6. EACH BOX SHALL CONTAIN 1 HOLDFAST ASSEMBLY.

CX1959

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

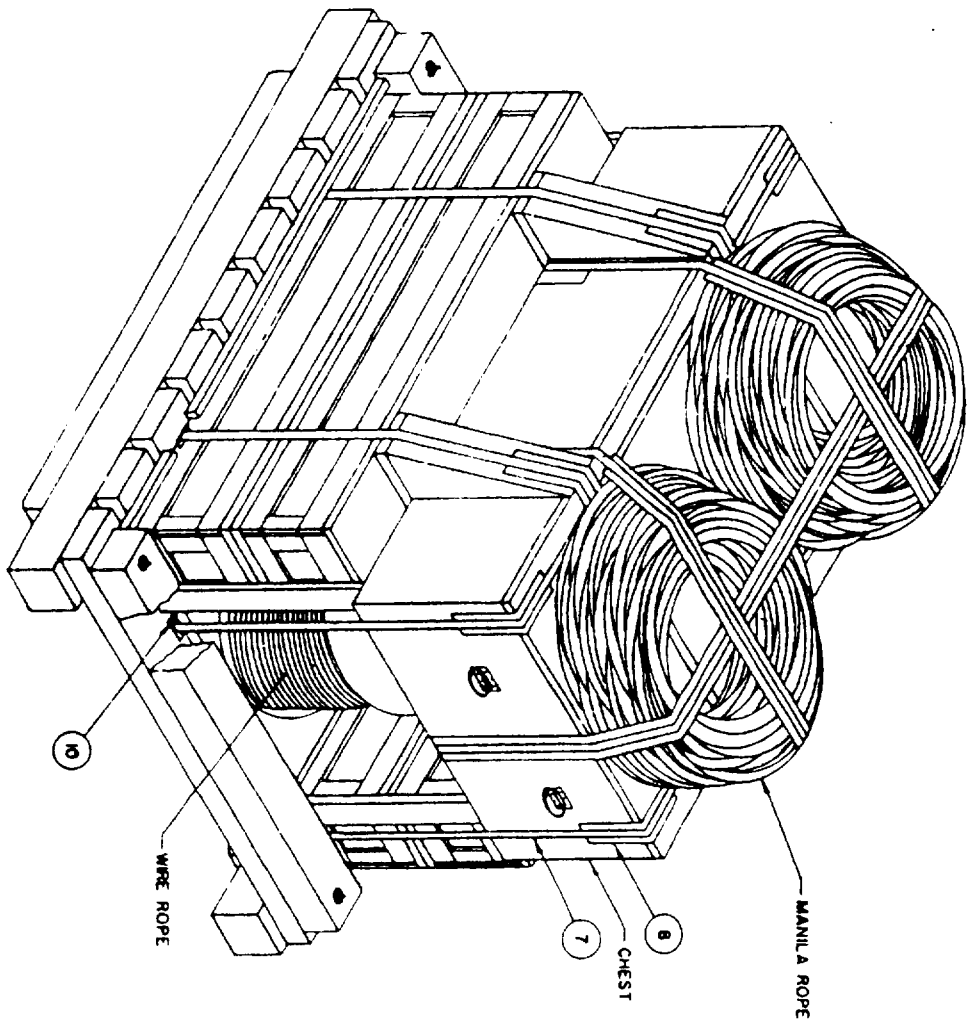


Figure 2. PACKING ARRANGEMENT AND DETAIL.

DX1956

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

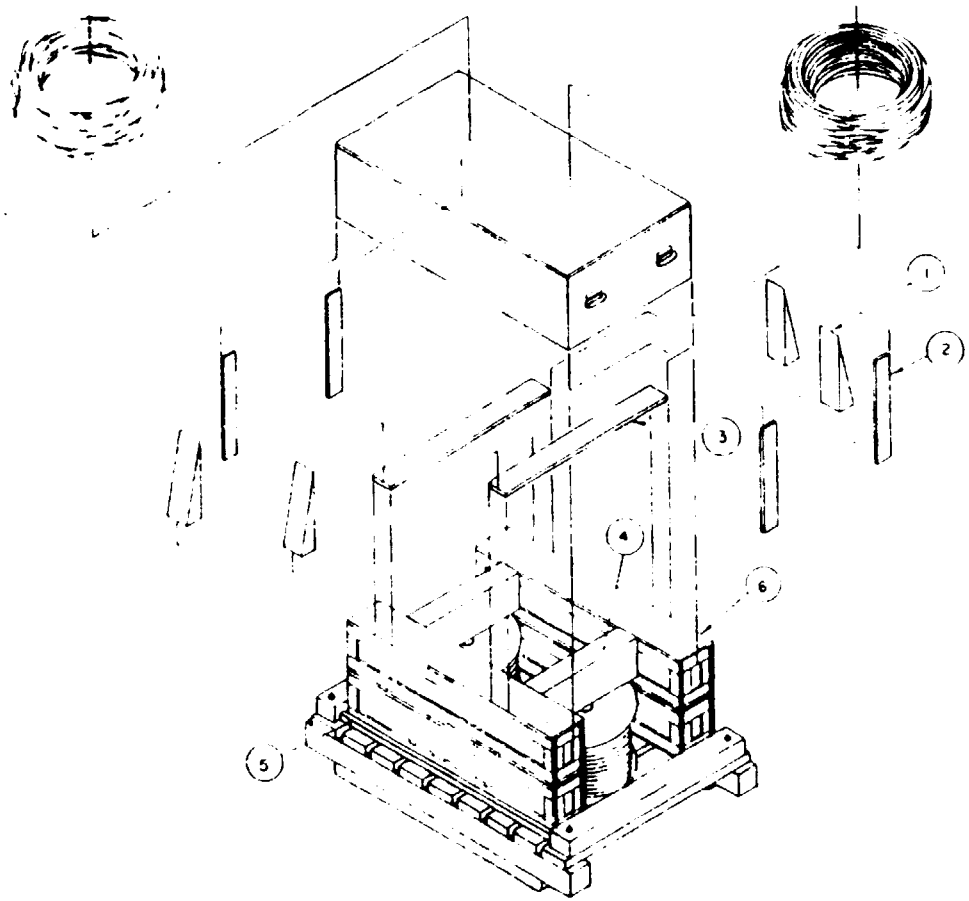


Figure 1. PACKAGING AND PACKING ASSEMBLY.

DX1955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FOR CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:29Z
Check the source to verify that this is the current version before use.