MILITARY SPECIFICATION SHEET

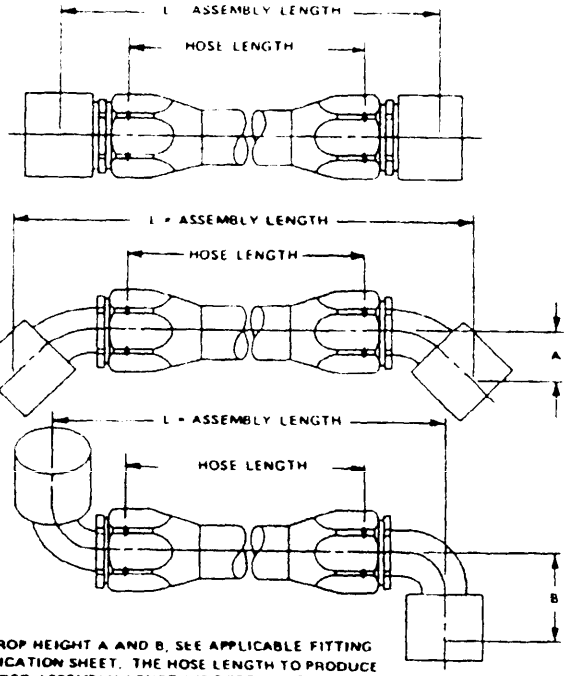
HOSE ASSEMBLY, RUBBER, LIGHTWEIGHT, MEDIUM PRESSURE, FIELD ATTACHABLE END FITTINGS, FLARELESS TO FLANGE, WITH LOCKWIRE HOLE.

This specification is approved for use by all Departments and Agencies of the Departments of Defense.

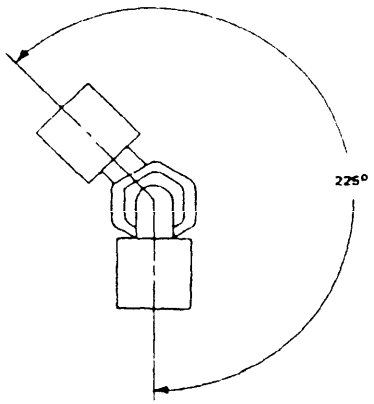
The complete requirements for procuring the hose assembly described herein shall consist of this document and the latest issue of specification MIL-H-83796.

FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.



FOR DROP HEIGHT A AND B, SEE APPLICABLE FITTING SPECIFICATION SHEET. THE HOSE LENGTH TO PRODUCE A DESIRED ASSEMBLY LENGTH IS DETERMINED BY MEASURING DISTANCE FROM SOCKET GROOVE TO POINT SHOWN IN SKETCHES



ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLANE PERPENDICULAR TO THE HOSE AXIS, SHALL BE SPECIFIED. SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHEST FITTING SHOULD BE ROTATED COUNTERCLOCKWISE. ANGLE WILL BE SPECIFIED IN 5° INCREMENTS. TOLERANCE ON ANGULAR ALIGNMENT, ± 5° ON HOSE LENGTHS UP TO 36 INCHES AND ± 10° ON HOSE LENGTHS OVER 36 INCHES

LENGTH L TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE.
LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT
HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:
- UNDER 12 INCHES NOT LESS THAN 1/8-INCH (TOLERANCE ± 1/8 INCH)
- 12 TO 18 INCHES, NOT LESS THAN 1/4-INCH (TOLERANCE ± 1/8 INCH).
- OVER 18 INCHES, NOT LESS THAN 1/2-INCH (TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES, ± 1/4-INCH). (TOLERANCES FOR LENGTHS FROM 36 TO 50 INCHES, ± 1/2-INCH; FOR LENGTHS OVER 50 INCHES, ± 1 PERCENT).

THE PART NO. SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE OD, LENGTH, STYLE AND ANGLE BETWEEN ELBOWS (AS APPLICABLE).
FLANGE FITTINGS NOT AVAILABLE IN SIZES –3, –4, –5, –6


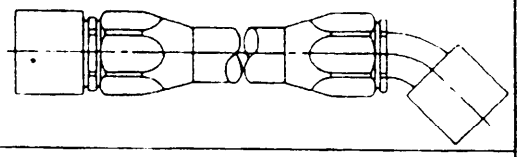
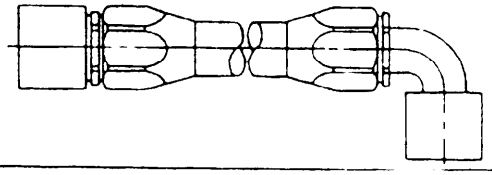
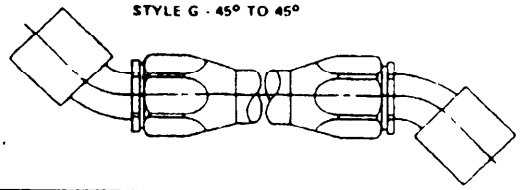
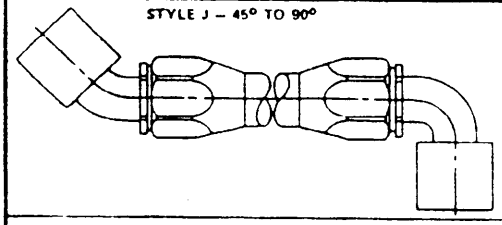
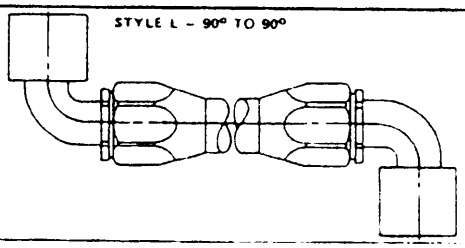
EXAMPLES OF PART NO.

M 83796/8 H 18 0 F 06 — HOSE ASSEMBLY FLARELESS TO FLANGE FOR 1/2-INCH TUBE OD 18 INCHES LONG, 30 DEG. BETWEEN ELBOWS

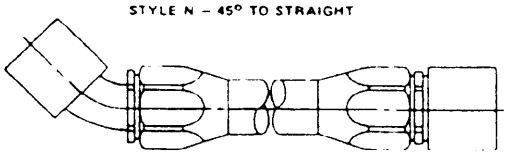
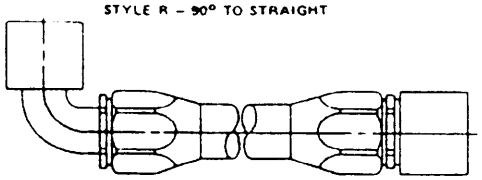
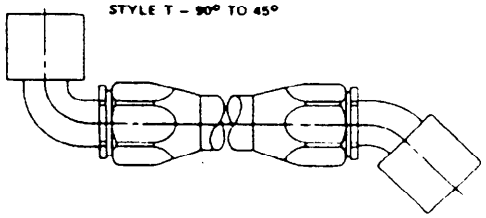
- 06 — ANGLE BETWEEN ELBOWS IN DEGREES, 30° = 5° · 06.
- F — STYLE OF FITTING (SEE SHEET 3 AND 4)
- 0 — LENGTH IN EIGHTHS (1/8 OF AN INCH).
- 18 — LENGTH IN INCHES. FOR LENGTHS UNDER 10 INCHES USE 09, 08, 07, etc
- H — SIZE CODE
- 8 — SPECIFICATION SHEET NUMBER
- M 83796/8 — DESIGNATES A MIL SPECIFICATION ITEM

DASH NO	-3	-4	-5	-6	-8	-10	-12	-16	-20	-24	-32
TUBING OD REF	3/16	1/4	5/16	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	2
SIZE CODE	B	E	F	G	H	J	K	M	N	P	R

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

HOSE ASSEMBLY CONFIGURATION FTG NO.1 FTG NO.2	FITTING ENDS MIL-F-83798		MIL-H-83797 HOSE CUT OFF FACTOR (INCH) FT INCHES VS HOSE DASH SIZE NO										
	1	2	3	4	5	6	8	-10	-12	16	-20	-24	32
STYLE A – STRAIGHT TO STRAIGHT  STYLE B – SAME AS STYLE A BUT WITH FIRESLEEVE	M83798/4	M83798/7	–	–	–	–	2.34	2.42	2.62	3.06	3.57	3.67	4.20
STYLE C STRAIGHT TO 45°  STYLE D – SAME AS STYLE C BUT WITH FIRESLEEVE	M83798/4	M83798/8	–	–	–	–	2.41	2.59	2.94	3.47	3.91	4.36	5.03
STYLE E – STRAIGHT TO 90°  STYLE F – SAME AS STYLE E BUT WITH FIRESLEEVE	M83798/4	M83798/9	–			–	2.34	2.55	2.96	3.53	4.03	4.64	5.32
STYLE G - 45° TO 45°  STYLE H – SAME AS STYLE G BUT WITH FIRESLEEVE	M83798/5	M83798/8	–	–	–	–	2.69	2.94	3.47	4.09	4.61	5.11	5.82
STYLE J – 45° TO 90°  STYLE K – SAME AS STYLE J BUT WITH FIRESLEEVE	M83798/5	M83798/9		–	–	–	2.62	2.90	3.49	4.15	4.73	5.29	6.11
STYLE L – 90° TO 90°  STYLE M – SAME AS STYLE L BUT WITH FIRESLEEVE	M83798/6	M83798/9	–	–	–	–	2.30	2.54	3.18	3.86	4.46	4.94	5.72

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

HOSE ASSEMBLY CONFIGURATION FTG NO.1 / FTG NO.2	FITTING ENDS MIL-F-83796 1	 2	MIL-H-83797 HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO -3	-4	-5	-6	-8	-10	-12	-16	-20	-24	-32
STYLE N – 45° TO STRAIGHT 	M83798/5	M83798/7	–	–	–	–	2.62	2.77	3.15	3.68	4.17	4.42	4.49
STYLE P – SAME AS STYLE N BUT WITH FIRESLEEVE													
STYLE R – 90° TO STRAIGHT 	M83798/6	M83798/7			–	–	2.30	2.41	2.84	3.39	3.90	4.07	4.60
STYLE S – SAME AS STYLE R BUT WITH FIRESLEEVE													
STYLE T – 90° TO 45° 	M83798/6	M83798/8	–	–	–	–	2.37	2.58	3.16	3.80	4.34	4.76	5.43
STYLE U – SAME AS STYLE T BUT WITH FIRESLEEVE													

NOTES

1. FITTINGS SHALL MATE WITH MS33514, MS33656, OR MS33786 END FITTINGS AS APPLICABLE.
2. FOR DESIGN AND SIZE OF FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE SPECIFICATION SHEET.
3. IDENTIFICATION: SEE PROCUREMENT SPECIFICATION.
4. DIMENSIONS IN INCHES.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

EXAMPLE OF HOSE CUT OFF FACTOR: FOR A -8 TUBE OD, 18-1/2 ASSEMBLY LENGTH, STYLE D, THE BULK HOSE LENGTH= 18.50 MINUS THE HCOF=18.50 –2.69=15.81 BULK HOSE LENGTH NEEDED IS 15.81 INCHES.

CUSTODIANS
AIR FORCE – 82
ARMY – AV

REVIEW ACTIVITIES
ARMY – AT, ME

USER ACTIVITIES
AIR FORCE – 11

PREPARING ACTIVITY
AIR FORCE – 82

PROJECT NO. 4720–0404

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DEPARTMENT OF THE AIR FORCE
DOD 318

OFFICIAL BUSINESS

SAN ANTONIO AIR LOGISTICS CENTER
SERVICE ENGINEERING DIVISION (MMEOP)
KELLY AFB TX 78241

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.