INCH-POUND

MIL-F-81836/2A(AS)
27 MARCH 1992
SUPERSEDING
MIL-F-81836/2(AS)
18 February 1972

MILITARY SPECIFICATION SHEET

FILTER, FLUID, PRESSURE, HYDRAULIC, 5000 PSI, 3 MICRON ABSOLUTE, STYLE B, ELECTRICAL INDICATOR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-81836(AS)


Notes:


1. Material: See procurement specification.
2. Dimensions in inches unless otherwise specified.
   Tolerances: Decimals ±.010, angles ±1°.
3. Direction of flow and port markings shall be clearly and permanently marked on each side.
4. Filter includes filter element M81836/4.
5. W diameter may be broken by inlet port provided unbroken solid shoulder extends for at least 270° of circumference.
6. Machined surfaces, "M" dia and 30° lead-in in Detail U shall be smooth to 32 microinches R_a per ANSI/ASME B46.1 unless otherwise specified.

AMSC N/A FSC 4920


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

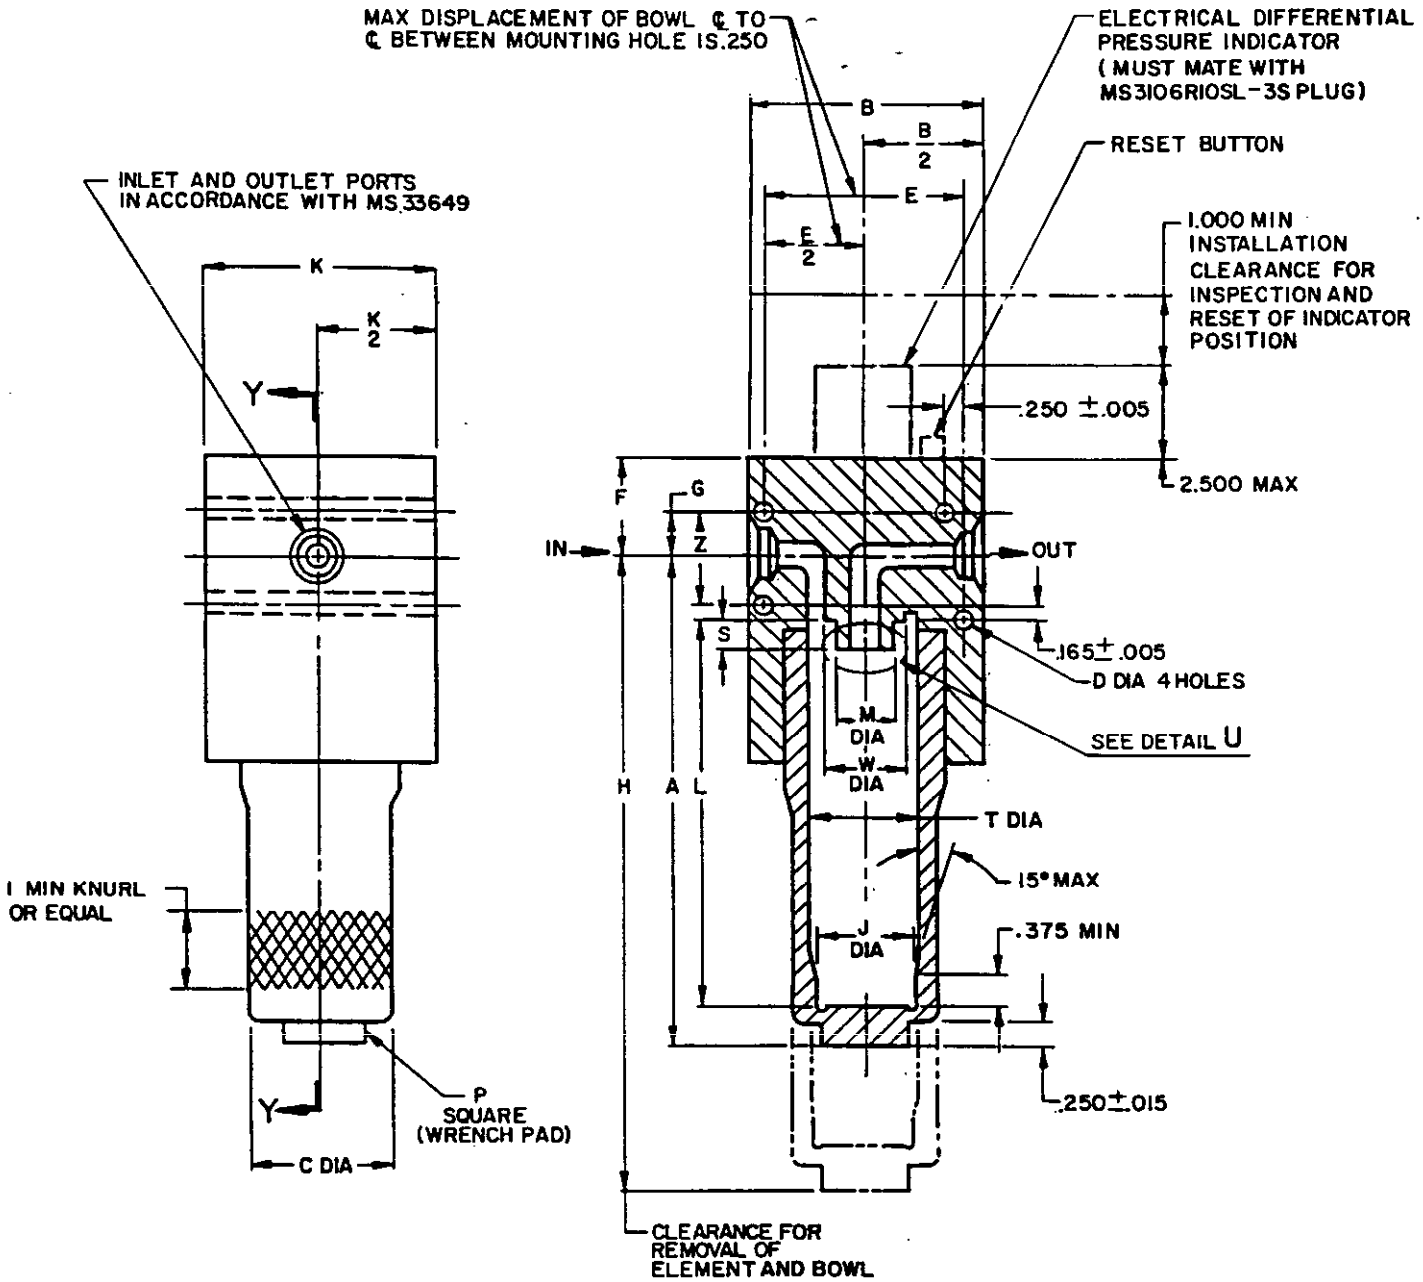

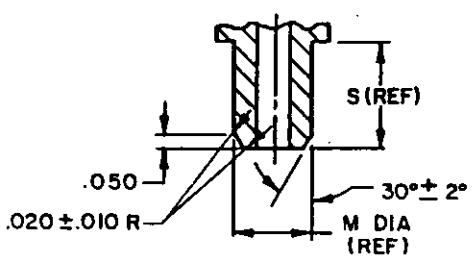

DETAIL U
FOR -16 AND -24
ENLARGED

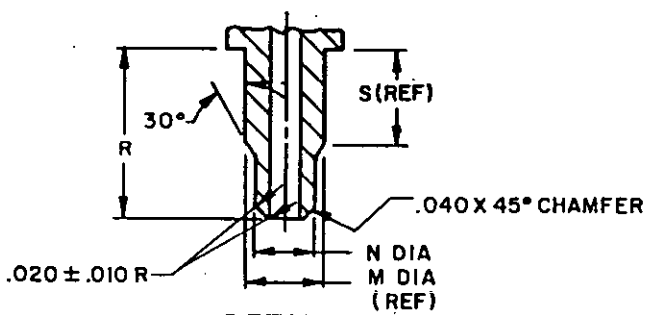

DETAIL U
FOR -8
ENLARGED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

ASSEMBLY PART NUMBER	PORT SIZE	FLOW RATE (gpm)	A MAX	B ±.030	C DIA MAX	D DIA ±.005	E	
M81836/2-8	-08	6	7.600	4.000	2.562	.281	3.125	±.005
M81836/2-16	-16	30	16.062	5.000	4.530	.406	4.375	-----
M81836/2-24	-24	60	21.625	6.000	5.780	.531	5.125	-----

ASSEMBLY PART NUMBER	F MAX	G		H MAX	J DIA ±.005	K	L ±.030	M DIA +.000 -.002	N DIA	P +.000 -.015
M81836/2-8	1.250	1.000	±.005	10.875	1.961	3.000	5.785	1.062	.875	1.125
M81836/2-16	2.125	1.375	-----	29.375	2.712	5.000	13.000	1.248	----	1.375
M81836/2-24	2.625	1.812	-----	38.188	3.732	6.000	16.100	1.625	----	1.625

ASSEMBLY PART NUMBER	R	S	T DIA	W DIA MIN	Z	
M81836/2-8	.812	.438	2.065	1.344	2.000	±.005
M81836/2-16	----	.600	2.834	1.594	3.562	-----
M81836/2-24	----	.600	3.900	2.000	4.500	-----

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

Preparing Activity:
Navy-AS

(Project 4920-N463)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.