[INCH-POUND]
A-A-59590/2
November 27, 2000

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET


HOLDERS, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .225 X .260 INCH BODY SIZE, WITH EJECTION ACTION

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A-A-59590

SCOPE. This CID specification sheet covers 3 piece card holders with an ejection action feature that forces the circuit card assembly to disengage from it installed position in heat sinking devices (cold plates, heat exchanger) or other applications. Card holders covered by this CID are intended to provide maximum contact between thermal paths on the circuit card assemblies and the heat sink surfaces and to provide resistance to shock and vibration. Items covered by this CID are intended for all federal agency applications and environments.

CLASSIFICATION. This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

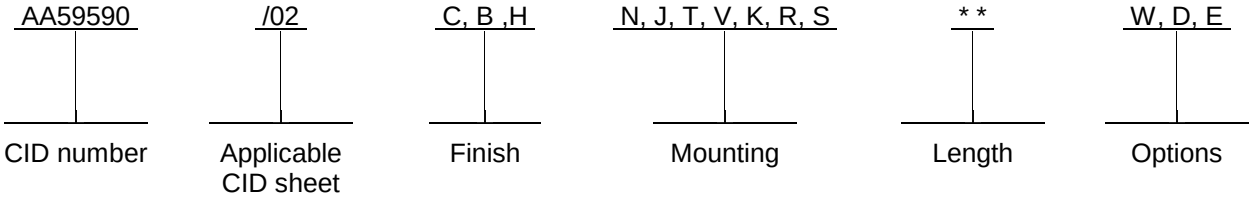

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer. An ejection action shall be used to allow for initial ejection of the circuit card assembly without damaging circuits, components, or connector pins.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and the general CID.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAC, Post Office Box 3990, Columbus, OH 43216-5000, or facsimile (614) 693-6939 or electronic mail 5998_Documents@dscc.dla.mil.

AMSC N/A FSC 5998
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Ejection. An ejection action shall be incorporated into the card holder. This shall allow for disengagement of the circuit card assembly from its mating connector(s). The minimal amount of ejection distance shall be .250 inches (6.35 mm) (See figure 1).

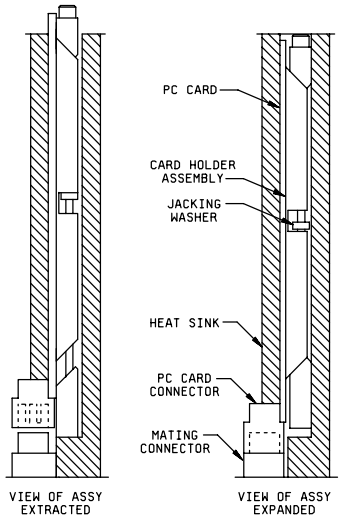


FIGURE 1 Extracted diagram.

Expanded and relaxed dimensions. Expanded and relaxed dimensions shall be as specified in figure 2.

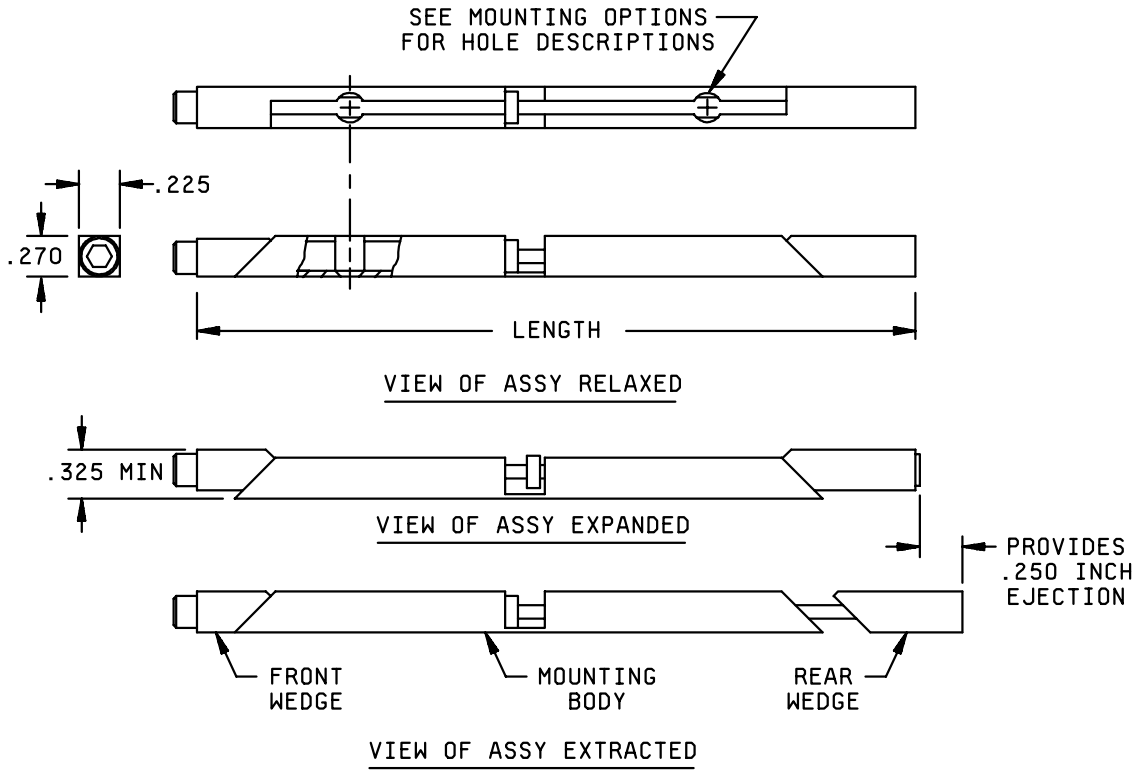


FIGURE 2 Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Mounting options. The mounting options shall be as specified in A-A-59590.

Mounting holes (when required). Two mounting holes are required on card holders less than 6.00 inches (152.4 mm) in length. The mounting holes shall be spaced using the length of the assembly minus 2.27 inches (57.66 mm) and centered on the mounting body. Four mounting holes are required on card holders 6.00 inches (152.4 mm) or greater in length. These shall be equally spaced using the length of the assembly minus 1.20 inches (30.48 mm) and centered on the mounting body.

Options. Card holders can have the following options. Card holders not requiring one of the following options shall leave the position in the PIN blank.

Lockwasher and flatwasher. A lockwasher and flatwasher located under the screw head will provide for additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flatwasher option shall include a suffix “W” in the PIN (see classification and notes).

Screw self-locking element. The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock vibration. Card holders requiring a screw self-locking element shall include a suffix “E” in the PIN (see classification and notes).

Lockwasher, flatwasher, and screw self-locking element. Card holders requiring a lockwasher, flatwasher, and screw self-locking element option shall include a suffix “D” in the PIN (see classification and notes).

PRODUCT CONFORMANCE PROVISIONS. Product conformance shall be as specified in A-A-59590 and herein.

Performance tests. The following tests shall be performed with a 0.062 inch thick circuit card with a pair of 6 inch card holders attached. A torque of 96 ounce-inch (67.8 Newton-cm) shall be obtained to secure the assembly to a suitable test fixture.

Vibration. Secure the card holder and circuit card assembly to a vibration system capable of producing an input of 25 Gs over a frequency range from 20 to 2000 to 20 Hz performed in 16 minutes. The assembly shall be able to withstand a vibration of 25 G-rms without dislodging or moving. This test shall be performed in both a perpendicular and parallel oscillation (in relationship to the circuit card) for a duration of 16 minutes in each orientation.

Shock. Secure the card holder and circuit card assembly to a standard drop shock tester capable of attaining at least 100 Gs. Subject the assembly to three shock pulses of 60g/6ms in each of the three principle planes (a total of 9 blows). The assembly shall be able to withstand the shock force without dislodging or moving.

Thermal transfer. With the card holder and circuit card assembly secured to a suitable cold plate test fixture, the assembly shall have a 2 degrees to 4 degrees C/W/in thermal resistance when measured over a range from 1W to 90W, dissipated by conduction only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

NOTES

PIN. The PIN should be used for government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of preparation and coordination of this CID specification sheet, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFGRs CAGE	MFGRs Name and Address	MGFRs contact information
18915	APW / Electronic Solutions 14100 Danielson Street Poway, CA 92064-6898	Tel: (858) 679-4550 Toll Free: (800) 854-7086 Fax: (858) 679-4555 E-mail: sales@apw-elsol.com URL: www.apw-elsol.com
52094	Calmark Corporation 4915 Walnut Grove Avenue San Gabriel, CA 91776-2021	Tel: (626) 287-0451 Fax: (626) 287-7350 E-mail: sales@calmark-corp.com URL: www.calmark-corp.com
71286	Fairchild Fasteners Camloc/Ram Products Division 3000 W. Lomita Blvd. Torrance, CA 90505-5103	Tel: (310) 784-2662 Fax: (310) 784-2628 E-mail: altedesco@fairchildfasteners.com URL: www.fairchildfasteners.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. This CID specification sheet supersedes the following manufacturer's P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE I. Commercial P/N supersession data.

PIN designator AA59590/02	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59590/02	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59590/02	Vendor similar designator or type part number 1/ CAGE 52094
CN28	E225-2.80	BN28W	WEA225-2.80	HN28E	EHA225-2.80L
CN30	E225-3.00	BN30W	WEA225-3.00	HN30E	EHA225-3.00L
CN35	E225-3.50	BN35W	WEA225-3.50	HN35E	EHA225-3.50L
CN38	E225-3.80	BN38W	WEA225-3.80	HN38E	EHA225-3.80L
CN48	E225-4.80	BN48W	WEA225-4.80	HN48E	EHA225-4.80L
CN53	E225-5.30	BN53W	WEA225-5.30	HN53E	EHA225-5.30L
CN55	E225-5.50	BN55W	WEA225-5.50	HN55E	EHA225-5.50L
CN58	E225-5.80	BN58W	WEA225-5.80	HN58E	EHA225-5.80L
CN61	E225-6.10	BN61W	WEA225-6.10	HN61E	EHA225-6.10L
CN67	E225-6.70	BN67W	WEA225-6.70	HN67E	EHA225-6.70L
CJ28	E225-2.80H	BJ28W	WEA225-2.80H	HJ28E	EHA225-2.80HL
CJ30	E225-3.00H	BJ30W	WEA225-3.00H	HJ30E	EHA225-3.00HL
CJ35	E225-3.50H	BJ35W	WEA225-3.50H	HJ35E	EHA225-3.50HL
CJ38	E225-3.80H	BJ38W	WEA225-3.80H	HJ38E	EHA225-3.80HL
CJ48	E225-4.80H	BJ48W	WEA225-4.80H	HJ48E	EHA225-4.80HL
CJ53	E225-5.30H	BJ53W	WEA225-5.30H	HJ53E	EHA225-5.30HL
CJ55	E225-5.50H	BJ55W	WEA225-5.50H	HJ55E	EHA225-5.50HL
CJ58	E225-5.80H	BJ58W	WEA225-5.80H	HJ58E	EHA225-5.80HL
CK61	E225-2650-6.10H	BK61W	WEA225-2650-6.10H	HK61E	EHA225-2650-6.10HL
CK67	E225-2650-6.70H	BK67W	WEA225-2650-6.70H	HK67E	EHA225-2650-6.70HL
CT28	E225-2.80T0	BT28W	WEA225-2.80T0	HT28E	EHA225-2.80T0L
CT30	E225-3.00T0	BT30W	WEA225-3.00T0	HT30E	EHA225-3.00T0L
CT35	E225-3.50T0	BT35W	WEA225-3.50T0	HT35E	EHA225-3.50T0L
CT38	E225-3.80T0	BT38W	WEA225-3.80T0	HT38E	EHA225-3.80T0L
CT48	E225-4.80T0	BT48W	WEA225-4.80T0	HT48E	EHA225-4.80T0L
CT53	E225-5.30T0	BT53W	WEA225-5.30T0	HT53E	EHA225-5.30T0L
CT55	E225-5.50T0	BT55W	WEA225-5.50T0	HT55E	EHA225-5.50T0L
CT58	E225-5.80T0	BT58W	WEA225-5.80T0	HT58E	EHA225-5.80T0L
CR61	E225-2650-6.10T0	BR61W	WEA225-2652-6.10T0	HR61E	EHA225-2651-6.10T0L
CR67	E225-2650-6.70T0	BR67W	WEA225-2652-6.70T0	HR67E	EHA225-2651-6.70T0L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

CV28	E225-2.80T2	BV28W	WEA225-2.80T2	HV28E	EHA225-2.80T2L
CV30	E225-3.00T2	BV30W	WEA225-3.00T2	HV30E	EHA225-3.00T2L
CV35	E225-3.50T2	BV35W	WEA225-3.50T2	HV35E	EHA225-3.50T2L
CV38	E225-3.80T2	BV38W	WEA225-3.80T2	HV38E	EHA225-3.80T2L
CV48	E225-4.80T2	BV48W	WEA225-4.80T2	HV48E	EHA225-4.80T2L
CV53	E225-5.30T2	BV53W	WEA225-5.30T2	HV53E	EHA225-5.30T2L
CV55	E225-5.50T2	BV55W	WEA225-5.50T2	HV55E	EHA225-5.50T2L
CV58	E225-5.80T2	BV58W	WEA225-5.80T2	HV58E	EHA225-5.80T2L
CS61	E225-2650-6.10T2	BS61W	WEA225-2652-6.10T2	HS61E	EHA225-2651-6.10T2L
CS67	E225-2650-6.70T2	BS67W	WEA225-2652-6.70T2	HS67E	EHA225-2651-6.70T2L
BN28	EA225-2.80	HN28W	WEHA225-2.80	CN28D	WE225-2.80L
BN30	EA225-3.00	HN30W	WEHA225-3.00	CN30D	WE225-3.00L
BN35	EA225-3.50	HN35W	WEHA225-3.50	CN35D	WE225-3.50L
BN38	EA225-3.80	HN38W	WEHA225-3.80	CN38D	WE225-3.80L
BN48	EA225-4.80	HN48W	WEHA225-4.80	CN48D	WE225-4.80L
BN53	EA225-5.30	HN53W	WEHA225-5.30	CN53D	WE225-5.30L
BN55	EA225-5.50	HN55W	WEHA225-5.50	CN55D	WE225-5.50L
BN58	EA225-5.80	HN58W	WEHA225-5.80	CN58D	WE225-5.80L
BN61	EA225-6.10	HN61W	WEHA225-6.10	CN61D	WE225-6.10L
BN67	EA225-6.70	HN67W	WEHA225-6.70	CN67D	WE225-6.70L
BJ28	EA225-2.80H	HJ28W	WEHA225-2.80H	CJ28D	WE225-2.80HL
BJ30	EA225-3.00H	HJ30W	WEHA225-3.00H	CJ30D	WE225-3.00HL
BJ35	EA225-3.50H	HJ35W	WEHA225-3.50H	CJ35D	WE225-3.50HL
BJ38	EA225-3.80H	HJ38W	WEHA225-3.80H	CJ38D	WE225-3.80HL
BJ48	EA225-4.80H	HJ48W	WEHA225-4.80H	CJ48D	WE225-4.80HL
BJ53	EA225-5.30H	HJ53W	WEHA225-5.30H	CJ53D	WE225-5.30HL
BJ55	EA225-5.50H	HJ55W	WEHA225-5.50H	CJ55D	WE225-5.50HL
BJ58	EA225-5.80H	HJ58W	WEHA225-5.80H	CJ58D	WE225-5.80HL
BK61	EA225-2650-6.10H	HK61W	E225-2653-6.10H	CK61D	WE225-2650-6.10HL
BK67	EA225-2650-6.70H	HK67W	E225-2653-6.70H	CK67D	WE225-2650-6.70HL
BT28	EA225-2.80T0	HT28W	WVHA225-2.80T0	CT28D	WE225-2.80T0L
BT30	EA225-3.00T0	HT30W	WVHA225-3.00T0	CT30D	WE225-3.00T0L
BT35	EA225-3.50T0	HT35W	WVHA225-3.50T0	CT35D	WE225-3.50T0L
BT38	EA225-3.80T0	HT38W	WVHA225-3.80T0	CT38D	WE225-3.80T0L
BT48	EA225-4.80T0	HT48W	WVHA225-4.80T0	CT48D	WE225-4.80T0L
BT53	EA225-5.30T0	HT53W	WVHA225-5.30T0	CT53D	WE225-5.30T0L
BT55	EA225-5.50T0	HT55W	WVHA225-5.50T0	CT55D	WE225-5.50T0L
BT58	EA225-5.80T0	HT58W	WVHA225-5.80T0	CT58D	WE225-5.80T0L
BR61	EA225-2650-6.10T0	HR61W	E225-2653-6.10T0	CR61D	WE225-2650-6.10T0L
BR67	EA225-2650-6.70T0	HR67W	E225-2653-6.70T0	CR67D	WE225-2650-6.70T0L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

BV28	EA225-2.80T2	HV28W	WEHA225-2.80T2	CV28D	WE225-2.80T2L
BV30	EA225-3.00T2	HV30W	WEHA225-3.00T2	CV30D	WE225-3.00T2L
BV35	EA225-3.50T2	HV35W	WEHA225-3.50T2	CV35D	WE225-3.50T2L
BV38	EA225-3.80T2	HV38W	WEHA225-3.80T2	CV38D	WE225-3.80T2L
BV48	EA225-4.80T2	HV48W	WEHA225-4.80T2	CV48D	WE225-4.80T2L
BV53	EA225-5.30T2	HV53W	WEHA225-5.30T2	CV53D	WE225-5.30T2L
BV55	EA225-5.50T2	HV55W	WEHA225-5.50T2	CV55D	WE225-5.50T2L
BV58	EA225-5.80T2	HV58W	WEHA225-5.80T2	CV58D	WE225-5.80T2L
BS61	EA225-2650-6.10T2	HS61W	E225-2653-6.10T2	CS61D	WE225-2650-6.10T2L
BS67	EA225-2650-6.70T2	HS67W	E225-2653-6.70T2	CS67D	WE225-2650-6.70T2L
HN28	EHA225-2.80	CN28E	E225-2.80L	BN28D	WEA225-2.80L
HN30	EHA225-3.00	CN30E	E225-3.00L	BN30D	WEA225-3.00L
HN35	EHA225-3.50	CN35E	E225-3.50L	BN35D	WEA225-3.50L
HN38	EHA225-3.80	CN38E	E225-3.80L	BN38D	WEA225-3.80L
HN48	EHA225-4.80	CN48E	E225-4.80L	BN48D	WEA225-4.80L
HN53	EHA225-5.30	CN53E	E225-5.30L	BN53D	WEA225-5.30L
HN55	EHA225-5.50	CN55E	E225-5.50L	BN55D	WEA225-5.50L
HN58	EHA225-5.80	CN58E	E225-5.80L	BN58D	WEA225-5.80L
HN61	EHA225-6.10	CN61E	E225-6.10L	BN61D	WEA225-6.10L
HN67	EHA225-6.70	CN67E	E225-6.70L	BN67D	WEA225-6.70L
HJ28	EHA225-2.80H	CJ28E	E225-2.80HL	BJ28D	WEA225-2.80HL
HJ30	EHA225-3.00H	CJ30E	E225-3.00HL	BJ30D	WEA225-3.00HL
HJ35	EHA225-3.50H	CJ35E	E225-3.50HL	BJ35D	WEA225-3.50HL
HJ38	EHA225-3.80H	CJ38E	E225-3.80HL	BJ38D	WEA225-3.80HL
HJ48	EHA225-4.80H	CJ48E	E225-4.80HL	BJ48D	WEA225-4.80HL
HJ53	EHA225-5.30H	CJ53E	E225-5.30HL	BJ53D	WEA225-5.30HL
HJ55	EHA225-5.50H	CJ55E	E225-5.50HL	BJ55D	WEA225-5.50HL
HJ58	EHA225-5.80H	CJ58E	E225-5.80HL	BJ58D	WEA225-5.80HL
HK61	EHA225-2650-6.10H	CK61E	E225-2650-6.10HL	BK61D	WEA225-2650-6.10HL
HK67	EHA225-2650-6.70H	CK67E	E225-2650-6.70HL	BK67D	WEA225-2650-6.70HL
HT28	EHA225-2.80T0	CT28E	E225-2.80T0L	BT28D	WEA225-2.80T0L
HT30	EHA225-3.00T0	CT30E	E225-3.00T0L	BT30D	WEA225-3.00T0L
HT35	EHA225-3.50T0	CT35E	E225-3.50T0L	BT35D	WEA225-3.50T0L
HT38	EHA225-3.80T0	CT38E	E225-3.80T0L	BT38D	WEA225-3.80T0L
HT48	EHA225-4.80T0	CT48E	E225-4.80T0L	BT48D	WEA225-4.80T0L
HT53	EHA225-5.30T0	CT53E	E225-5.30T0L	BT53D	WEA225-5.30T0L
HT55	EHA225-5.50T0	CT55E	E225-5.50T0L	BT55D	WEA225-5.50T0L
HT58	EHA225-5.80T0	CT58E	E225-5.80T0L	BT58D	WEA225-5.80T0L
HR61	EHA225-2650-6.10T0	CR61E	E225-2650-6.10T0L	BR61D	WEA225-2652-6.10T0L
HR67	EHA225-2650-6.70T0	CR67E	E225-2650-6.70T0L	BR67D	WEA225-2652-6.70T0L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

HV28	EHA225-2.80T2	CV28E	E225-2.80T2L	BV28D	WEA225-2.80T2L
HV30	EHA225-3.00T2	CV30E	E225-3.00T2L	BV30D	WEA225-3.00T2L
HV35	EHA225-3.50T2	CV35E	E225-3.50T2L	BV35D	WEA225-3.50T2L
HV38	EHA225-3.80T2	CV38E	E225-3.80T2L	BV38D	WEA225-3.80T2L
HV48	EHA225-4.80T2	CV48E	E225-4.80T2L	BV48D	WEA225-4.80T2L
HV53	EHA225-5.30T2	CV53E	E225-5.30T2L	BV53D	WEA225-5.30T2L
HV55	EHA225-5.50T2	CV55E	E225-5.50T2L	BV55D	WEA225-5.50T2L
HV58	EHA225-5.80T2	CV58E	E225-5.80T2L	BV58D	WEA225-5.80T2L
HS61	EHA225-2651-6.10T2	CS61E	E225-2650-6.10T2L	BS61D	WEA225-2652-6.10T2L
HS67	EHA225-2651-6.70T2	CS67E	E225-2650-6.70T2L	BS67D	WEA225-2652-6.70T2L
CN28W	WE225-2.80	BN28E	EA225-2.80L	HN28D	WEHA225-2.80L
CN30W	WE225-3.00	BN30E	EA225-3.00L	HN30D	WEHA225-3.00L
CN35W	WE225-3.50	BN35E	EA225-3.50	HN35D	WEHA225-3.50L
CN38W	WE225-3.80	BN38E	EA225-3.80L	HN38D	WEHA225-3.80L
CN48W	WE225-4.80	BN48E	EA225-4.80L	HN48D	WEHA225-4.80L
CN53W	WE225-5.30	BN53E	EA225-5.30L	HN53D	WEHA225-5.30L
CN55W	WE225-5.50	BN55E	EA225-5.50L	HN55D	WEHA225-5.50L
CN58W	WE225-5.80	BN58E	EA225-5.80L	HN58D	WEHA225-5.80L
CN61W	WE225-6.10	BN61E	EA225-6.10L	HN61D	WEHA225-6.10L
CN67W	WE225-6.70	BN67E	EA225-6.70L	HN67D	WEHA225-6.70L
CJ28W	WE225-2.80H	BJ28E	EA225-2.80HL	HJ28D	WEHA225-2.80HL
CJ30W	WE225-3.00H	BJ30E	EA225-3.00HL	HJ30D	WEHA225-3.00HL
CJ35W	WE225-3.50H	BJ35E	EA225-3.50HL	HJ35D	WEHA225-3.50HL
CJ38W	WE225-3.80H	BJ38E	EA225-3.80HL	HJ38D	WEHA225-3.80HL
CJ48W	WE225-4.80H	BJ48E	EA225-4.80HL	HJ48D	WEHA225-4.80HL
CJ53W	WE225-5.30H	BJ53E	EA225-5.30HL	HJ53D	WEHA225-5.30HL
CJ55W	WE225-5.50H	BJ55E	EA225-5.50HL	HJ55D	WEHA225-5.50HL
CJ58W	WE225-5.80H	BJ58E	EA225-5.80HL	HJ58D	WEHA225-5.80HL
CK61W	WE225-2650-6.10H	BK61E	EA225-2650-6.10HL	HK61D	WEHA225-2653-6.10HL
CK67W	WE225-2650-6.70H	BK67E	EA225-2650-6.70HL	HK67D	WEHA225-2653-6.70HL
CT28W	WE225-2.80T0	BT28E	EA225-2.80T0L	HT28D	WEHA225-2.80T0L
CT30W	WE225-3.00T0	BT30E	EA225-3.00T0L	HT30D	WEHA225-3.00T0L
CT35W	WE225-3.50T0	BT35E	EA225-3.50T0L	HT35D	WEHA225-3.50T0L
CT38W	WE225-3.80T0	BT38E	EA225-3.80T0L	HT38D	WEHA225-3.80T0L
CT48W	WE225-4.80T0	BT48E	EA225-4.80T0L	HT48D	WEHA225-4.80T0L
CT53W	WE225-5.30T0	BT53E	EA225-5.30T0L	HT53D	WEHA225-5.30T0L
CT55W	WE225-5.50T0	BT55E	EA225-5.50T0L	HT55D	WEHA225-5.50T0L
CT58W	WE225-5.80T0	BT58E	EA225-5.80T0L	HT58D	WEHA225-5.80T0L
CR61W	WE225-2650-6.10T0	BR61E	EA225-2650-6.10T0L	HR61D	E225-2653-6.10T0L
CR67W	WE225-2650-6.70T0	BR67E	EA225-2650-6.70T0L	HR67D	E225-2653-6.70T0L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

CV28W	WE225-2.80T2	BV28E	EA225-2.80T2L	HV28D	WEHA225-2.80T2L
CV30W	WE225-3.00T2	BV30E	EA225-3.00T2L	HV30D	WEHA225-3.00T2L
CV35W	WE225-3.50T2	BV35E	EA225-3.50T2L	HV35D	WEHA225-3.50T2L
CV38W	WE225-3.80T2	BV38E	EA225-3.80T2L	HV38D	WEHA225-3.80T2L
CV48W	WE225-4.80T2	BV48E	EA225-4.80T2L	HV48D	WEHA225-4.80T2L
CV53W	WE225-5.30T2	BV53E	EA225-5.30T2L	HV53D	WEHA225-5.30T2L
CV55W	WE225-5.50T2	BV55E	EA225-5.50T2L	HV55D	WEHA225-5.50T2L
CV58W	WE225-5.80T2	BV58E	EA225-5.80T2L	HV58D	WEHA225-5.80T2L
CS61W	WE225-2650-6.10T2	BS61E	EA225-2650-6.10T2L	HS61D	E225-6.10T2L
CS67W	WE225-2650-6.70T2	BS67E	EA225-2650-6.70T2L	HS67D	E225-6.70T2L

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph.

MILITARY INTERESTS:

Custodians:
Air Force - 11
Army - CR
DLA - CC
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity

DLA - CC

Project 5998-0097-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.