

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-8603


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

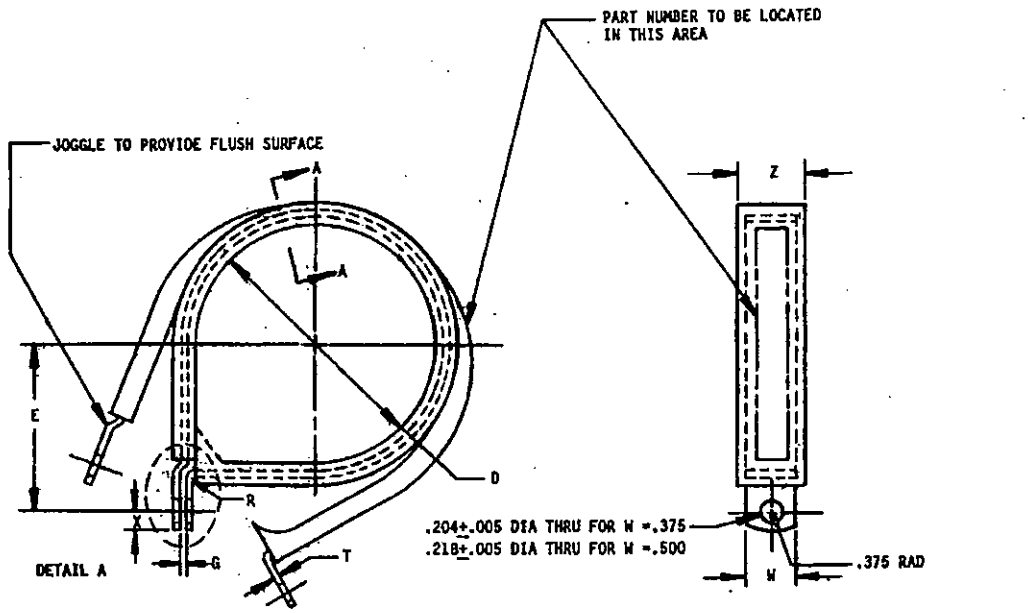




DETAIL A
ENLARGED

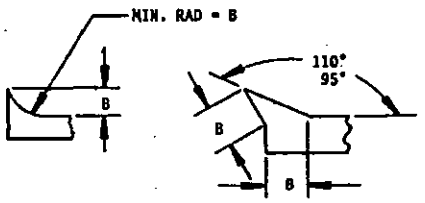

ACCEPTABLE WEDGE CONFIGURATIONS



SECTION A-A
ACCEPTABLE DESIGN

Ⓑ DENOTES CHANGES

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY-AV NAVY- AIR FORCE-99 DLA- ARMY - AV, MI, AR, ME REVIEW: NAVY - AS, AF - 82, DLA - IS USER: ARMY - AR, MI PROJECT NUMBER: 5340-1835	MILITARY SPECIFICATION SHEET TITLE: CLAMP, LOOP, CUSHIONED, WEDGE, POLYTETRAFLUORO-ETHYLENE	SPECIFICATION SHEET NUMBER MS21122B 14 FEB 1989 SUPERSEDING MS21122A 2 DEC. 1970 AMSC- N/A FSC: 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

Form approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-8603

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

DASH NOS.	RIGID TUBE NOMINAL OD (REF)	DIMENSIONS															
		B ±.032	D ±.015 DIA	E		G	R ±.016 RAD	S +.016 -.000	T		W		X		Z. MAX.	
				ALUM.	CRES				ALUM.	CRES	ALUM.	CRES	ALUM.	CRES	ALUM.	CRES
-1	1/16		.062	.436	.436				.020	.020	.375		.188			
-2	1/8	.078	.125	.457	.457											
-3	3/16		.188	.498	.498											
-4	1/4	.094	.250	.529	.529				.0320							
-5	5/16	.109	.313	.560	.560		.062		±.0025			.375		.188		.497
-6	3/8		.375	.592	.592											
-7	7/16		.438	.623	.623											
-8	1/2	.125	.500	.654	.654	.062									.622	
-9	9/16		.563	.752	.749	+.016 -.000										.622
-10	5/8		.625	.783	.780											
-11	11/16		.688	.814	.811											
-12	3/4		.750	.845	.842				.050							
-13	13/16		.813	.877	.858		.109		±.004							
-14	7/8		.875	.908	.889			.025			.500		.218			
-15	15/16		.938	.939	.920					.0320						
-16	1		1.000	.970	.951					±.0035						
-17	1-1/16		1.063	1.002	.983							.500				
-18	1-1/8		1.125	1.062	1.030									.218		
-19	1-3/16	.187	1.188	1.093	1.061											
-20	1-1/4		1.250	1.124	1.092											
-21	1-5/16		1.313	1.156	1.124	.094			.062							
-22	1-3/8		1.375	1.187	1.155	+.031 -.000	.125		±.005						.656	.658
-23	1-7/16		1.438	1.218	1.186											
-24	1-1/2		1.500	1.249	1.217											
-25	1-9/16		1.563	1.281	1.259											
-26	1-5/8		1.625	1.312	1.280											
-27	1-11/16		1.688	1.344	1.312											

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY-AV NAVY-
AIR FORCE-99 DLA-
REVIEW: ARMY - AV, MI, AR, ME
NAVY - AS, AF - 82, DLA - IS
USER: ARMY - AR, MI
PROJECT NUMBER: 5340-1835

MILITARY SPECIFICATION SHEET

TITLE: CLAMP, LOOP, CUSHIONED, WEDGE, POLYTETRAFLUORO-ETHYLENE

SPECIFICATION SHEET NUMBER
MS21122B 14 FEB 1989

SUPERSEDING
MS21122A 2 DEC. 1970

AMSC- N/A FSC: 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Page 2 of 4

DD FORM 672 MAY 1988

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

Form approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-8603

DASH NOS.	RIGID TUBE NOMINAL OD (REF)	DIMENSIONS															
		B ±.032	O ±.015 DIA	E ALUM.	E CRES	G	R +.016 RAD	S +.016 -.000	T ALUM.	T CRES	W ALUM.	W CRES	X ALUM.	X CRES	Z MAX. ALUM.	Z MAX. CRES
-28	1-3/4	.187	1.750	1.374	1.342	.094	.125	.025	.062 ±.005	.0320 ±.0035	.500	.500	.218	.218	.656	.658
(8) -29	1-13/16		1.812	1.406	1.374	+.031 -.000										
-30	1-7/8		1.875	1.437	1.405											
-31	1-15/16		1.938	1.468	1.444											
-32	2		2.000	1.499	1.475											
-33	2-1/16		2.062	1.531	1.507											
(8) -34	2-1/8		2.125	1.562	1.538											
-35	2-3/16		2.188	1.594	1.570											
-36	2-1/4		2.250	1.624	1.600											
-37	2-5/16		2.312	1.655	1.631											
-38	2-3/8		2.375	1.387	1.663											
-40	2-1/2		2.500	1.752	1.728											
-42	2-5/8		2.625	1.812	1.788											
-43	2-11/16		2.688	1.844	1.820	.125										
-44	2-3/4		2.750	1.875	1.851	+.031 -.000										
-45	2-13/16		2.812	1.906	1.882											
-46	2-7/8		2.875	1.937	1.913											
-48	3		3.000	2.000	1.976											
-50	3-1/8		3.125	2.062	2.038											
-52	3-1/4		3.250	2.125	2.101											
-54	3-3/8		3.375	2.187	2.163											
-56	3-1/2		3.500	2.250	2.226											
-58	3-5/8		3.625	2.312	2.288											
-64	4		4.000	2.500	2.476											
-66	4-1/8		4.125	2.562	2.538											

(8) (8)

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY-AV NAVY-
AIR FORCE-99 DLA-
REVIEW: ARMY - AV, MI, AR, ME
NAVY - AS, AF - 82, DLA - IS
USER: ARMY - AR, MI
PROJECT NUMBER: 5340-1835

MILITARY SPECIFICATION SHEET

TITLE: CLAMP, LOOP, CUSHIONED, WEDGE, POLYTETRAFLUORO-ETHYLENE

SPECIFICATION SHEET NUMBER
MS21122B 14 FEB 1989
SUPERSEDING
MS21122A 2 DEC. 1970
AMSC- N/A FSC: 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Page 3 of 4

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-8603

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIALS: (SEE PROCUREMENT SPECIFICATION)

   (a) CLAMP BAND:

   (1) ALUMINUM ALLOY ALCLAD 2024 PLATE AND SHEET PER QQ-A-250/5. HEAT TREATED IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
   (2) CORROSION-RESISTANT STEEL TYPE 321 PER AMS 5510.

   (b) CUSHION: MOLDED OR EXTRUDED POLYTETRAFLUOROETHYLENE (PTFE) PER ASTM D1457, TYPE 1.

2. FINISH: (SEE PROCUREMENT SPECIFICATION)

   (a) CLAMP BAND:

   (1) ALUMINUM ALLOY: ALUMINUM ALLOY BANDS SHALL BE FINISHED IN ACCORDANCE WITH MIL-C-5541, CLASS 1A.
   (2) CORROSION-RESISTANT STEEL: CORROSION-RESISTANT STEEL SHALL BE CLEANED AND PASSIVATED PER QQ-P-35, LATEST REVISION.

   (b) CUSHION: POLYTETRAFLUOROETHYLENE (PTFE). CUSHION FABRICATED FROM PTFE SHALL BE SODIUM TREATED IN ACCORDANCE WITH THE SURFACE TREATMENT PARAGRAPHS OF AMS 2491 TO REDUCE THE MATERIAL LUBRICITY.

NOTES:

1. REMOVE ALL TOOL AND DIE MARKS, BURRS AND SHARP EDGES.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS ±.015, ANGLES ±1/2°.
3. LETTER "W" ON PART NUMBER INDICATES STANDARD WEDGE TYPE CUSHION. WEDGE (W) IS MANDATORY FOR -2 THROUGH -48 SIZE CLAMPS.
4. WEDGE IS PROHIBITED ON -1 AND -50 THROUGH -66 SIZE CLAMPS.
5. WEDGE SHALL BE MOLDED TO CUSHION USING PRESSURE AND HEAT TO ACCOMPLISH A BOND BETWEEN CUSHION AND WEDGE.
6. PART NUMBER:

   ADD "C" BEFORE DASH NUMBER FOR CORROSION-RESISTANT STEEL CLAMP.

   EXAMPLE OF PART NUMBERS:

   FOR -2 THROUGH -48 SIZE CLAMPS (WEDGE MANDATORY)

   MS21122 W - 8
   - 8 — CLAMP, 1/2" NOMINAL TUBE OD
   - - ALUMINUM ALLOY BAND
   - W — STANDARD WEDGE
   - MS21122 — BASIC PART NUMBER

   FOR -1, AND -50 THROUGH -66 SIZE CLAMPS (WEDGE PROHIBITED)

   MS21122 C 64
   - 64 — CLAMP, 4" NOMINAL TUBE OD
   - C — CORROSION RESISTANT STEEL BAND
   - MS21122 — BASIC PART NUMBER

7. THE MS PART NUMBER, DASH NUMBER AND MANUFACTURER'S IDENTIFICATION SHALL BE MARKED ON EACH CLAMP.
8. CLAMPS SHALL BE FURNISHED IN THE OPEN POSITION.
9. DIMENSION "D" IS APPLICABLE IN CLOSED POSITION ONLY.
10. REINFORCED CORNER AND STIFFENING BEAD ARE MANDATORY.
11. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
12. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
13. CLAMP WITH NEW CUSHION MATERIAL SHALL BE USED EFFECTIVE FROM THE DATE OF THIS DOCUMENT; HOWEVER, CLAMPS WITH OLD CUSHION MATERIAL SHALL BE USED UNTIL EXISTING STOCKS ARE DEPLETED.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY--AV NAVY--
AIR FORCE--99 DLA--
REVIEW: ARMY - AV, MI, AR, ME
USER: NAVY - AS AF - 82 DLA - IS
ARMY - AR, MI
PROJECT NUMBER: 5340-1835

MILITARY SPECIFICATION SHEET

TITLE CLAMP, LOOP, CUSHIONED, WEDGE, POLYTETRAFLUORO-ETHYLENE

SPECIFICATION SHEET NUMBER
MS21122B 14 FEB 1989
SUPERSEDING
MS21122A 2 DEC. 1970
AMSC- N/A FSC: 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.