FED. SUP CLASS
5305

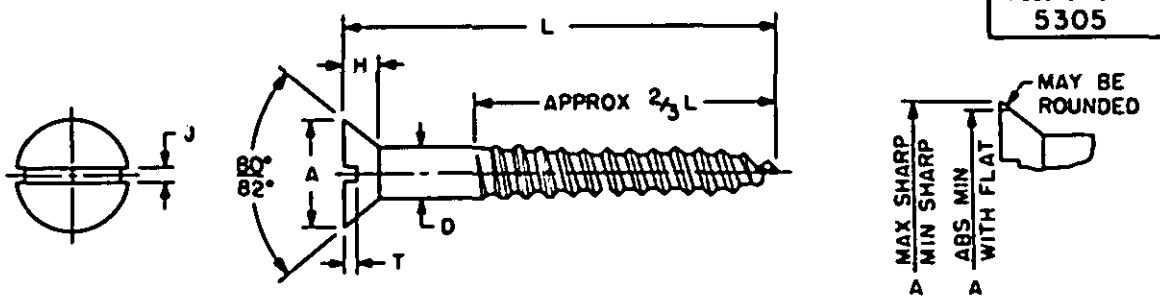


TABLE I

NOMINAL SIZE		2	3°	4	5°	6	7°	8	9°	10	12	14	16	18
D SCREW DIA	BASIC	.086	.099	.112	.125	.138	.151	.164	.177	.190	.216	.242	.268	.294
	MAX	.090	.103	.116	.129	.142	.155	.168	.181	.194	.220	.246	.272	.298
	MIN	.079	.092	.105	.118	.131	.144	.157	.170	.183	.209	.235	.261	.287
A HEAD DIA	MAX SHARP	.172	.199	.225	.252	.279	.305	.332	.358	.385	.438	.491	.544	.597
	MIN SHARP	.156	.181	.207	.232	.257	.283	.308	.334	.359	.410	.461	.512	.563
	ABS MIN	.147	.171	.195	.220	.244	.268	.292	.316	.340	.389	.437	.485	.534
H HEAD HEIGHT	REF	.051	.059	.067	.075	.083	.091	.100	.108	.116	.132	.148	.164	.180
J SLOT WIDTH	MAX	.031	.035	.039	.043	.048	.048	.054	.054	.060	.067	.075	.075	.084
	MIN	.023	.027	.031	.035	.039	.039	.045	.045	.050	.056	.064	.064	.072
T SLOT DEPTH	MAX	.023	.027	.030	.034	.038	.041	.045	.049	.053	.060	.068	.075	.083
	MIN	.015	.017	.020	.022	.024	.027	.029	.032	.034	.039	.044	.049	.054
THREADS PER INCH		26	24	22	20	18	16	15	14	13	11	10	9	8

NOTES:

(E) * Inactive, see sheet 2.

1. MATERIAL: Carbon steel, 1010 thru 1022 or 1108 thru 1118 in accordance with QQ-S-631, QQ-S-634, QQ-S-637 or QQ-W-405.
(E) Brass, alloy no. 260 or 268, quarter-hard in accordance with QQ-B-613 or QQ-B-626; or alloy no. 260 or 270, quarter-hard in accordance with QQ-W-321.

2. PROTECTIVE COATING: Steel - Cadmium plated in accordance with QQ-P-416, Type II, Class 3 or MIL-C-81562, Type II, Class 3; or zinc coated in accordance with QQ-Z-325, Type II, Class 3 or MIL-C-81562, Type II, Class 3.
(E) Brass - Plain, uncoated.

3. THREADS: Maximum permissible variation in number of threads per inch shall be plus or minus 10 percent.

5. DIMENSIONS: All dimensions are in inches.

6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35494-1.

7. Referenced documents shall be of the issue in effect on date of invitations for bid.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(E) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEWER: AV, EA, IS, MI, AT, MC, ME, MU, PA, SH, VT
USER:

APPROVED 4 DEC 1956 REVISED (A) 12 NOV 1961 (B) 18 OCT 1966 (C) 1 JUN 1967 (D) 20 MAY 1968 (E) 15 AUG 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. VC	TITLE	MILITARY STANDARD
Other Cust YD 82	SCREW, WOOD, FLAT HEAD, SLOTTED, STEEL AND BRASS	MS 35494
PROCUREMENT SPECIFICATION FF-S-111	SUPERSEDES ANSSO in part, BCOI series, and BCOII	SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

TABLE II

STEEL, CADMIUM OR ZINC PLATED

NOMINAL SIZE L LENGTH	TOL.	2 DASH NO.	3 DASH NO.*	4 DASH NO.	5 DASH NO.*	6 DASH NO.	7 DASH NO.*	8 DASH NO.	9 DASH NO.*	10 DASH NO.	12 DASH NO.	14 DASH NO.	16 DASH NO.	18 DASH NO.
.25	+.00	1		8										
.38	-.03	2	901	9	20	31								
.50		3	902	10	21	32	44	56						
.62		4	903	11	22	33	45	57						
.75	+.00	5	904	12	23	34	46	58	69	83	98			
.88	-.05		905	13	24	35	47	59	70	84	99			
1.00			906	14	25	36	48	60	71	85	100	113		
1.25				15	26	37	49	61	72	86	101	114	129	
1.50				16		38	50	62	73	87	102	115	130	142
1.75	+.00					39		63	74	88	103	116	131	
2.00	-.06					40		64	75	89	104	117	132	144
2.25						41		65		90	105	118		
2.50						42		66	77	91	106	119	134	146
2.75								67		92	107	120	135	
3.00	+.00							68		93	108	121	136	148
3.50	-.09									94	109	122	137	149
4.00											110	123	138	150
4.50												124	139	
5.00												125	140	

TABLE III

BRASS, PLAIN, UNCOATED

NOMINAL SIZE L LENGTH	TOL	2 DASH NO.	3 DASH NO.*	4 DASH NO.	5 DASH NO.*	6 DASH NO.	7 DASH NO.*	8 DASH NO.	9 DASH NO.*	10 DASH NO.	12 DASH NO.	14 DASH NO.	16 DASH NO.
.25	+.00	201		208									
.38	-.03	202	910	209	220	230							
.50		203	911	210	221	231	242	253					
.62		204	912	211	222	232	243	254	265	275			
.75	+.00	205	913	212	223	233	244	255	266	276	289		
.88	-.05			213	224	234	245	256	267	277	290		
1.00				214	225	235	246	257	268	278	291	305	
1.25						236	247	258	269	279	292	306	
1.50						237	248	259	270	280	293	307	
1.75	+.00							260		281	294	308	
2.00	-.06							261		282	295	309	318
2.25										283	296		
2.50										284	297	311	320
3.00	+.00										299	313	322
3.50	-.09										300		

* NOTE: Crossed-out dash numbers (sizes 3, 5, 7 and 9) are (E) INACTIVE FOR NEW DESIGN AFTER 15 August 1974.

INTERCHANGEABILITY

Steel, cadmium plated screws covered by dash numbers 501 thru 650 given in revision B of this standard are canceled after 1 June 1967. Brass, black oxide coated screws covered by dash numbers 701 thru 822 given in revision C of this standard and screws covered on AN550 in part are canceled after 20 May 1968. The canceled screws should be used for maintenance purposes until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with Table IV (see sheet 3).

APPROVED 4 DEC 1956 REVISED (D) 20 MAY 1968 (E) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust YD 82	SCREW, WOOD, FLAT HEAD, SLOTTED, STEEL AND BRASS	MS 35494
PROCUREMENT SPECIFICATION FF-S-111	SUPERSEDES: AN550 in part, BQQX series and BQGX1	SHEET 2 OF 3

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE IV - INTERCHANGEABILITY

PART NUMBER	
CANCELED	SUPSD BY
MS35494	MS35494
501	1
502	2
503	3
504	4
508	8
509	9
510	10
511	11
512	12
513	13
514	14
515	15
520	20
521	21
522	22
523	23
524	24
525	25
526	26
531	31
532	32
533	33
534	34
535	35
536	36
537	37
538	38
544	44
545	45
546	46
547	47
548	48
549	49
550	50
556	56
557	57
558	58
559	59
560	60
561	61
562	62
563	63
564	64
565	65
569	69
570	70
571	71
572	72
573	73
574	74
575	75
577	77
583	83
584	84
585	85
586	86
587	87
588	88
589	89
590	90
591	91
592	93
593	94
598	98
599	99
600	100
601	101
602	102
603	103
604	104

PART NUMBER	
CANCELED	SUPSD BY
MS35494	MS35494
605	105
606	106
608	108
609	109
613	113
614	114
615	115
616	116
617	117
618	118
619	119
621	121
622	122
623	123
629	129
630	130
631	131
632	132
634	134
636	136
637	137
638	138
642	142
644	144
646	146
648	148
649	149
650	150
701	201
702	202
703	203
704	204
705	205
708	208
709	209
710	210
711	211
712	212
713	213
714	214
720	220
721	221
722	222
723	223
724	224
725	225
730	230
731	231
732	232
733	233
734	234
735	235
736	236
737	237
742	242
743	243
744	244
745	245
746	246
747	247
748	248
753	253
754	254
755	255
756	256
757	257
758	258
759	259
760	260
761	261

PART NUMBER	
CANCELED	SUPSD BY
MS35494	MS35494
765	265
766	266
767	267
768	268
769	269
770	270
775	275
776	276
777	277
778	278
779	279
780	280
781	281
782	282
784	284
789	289
790	290
791	291
792	292
793	293
794	294
795	295
796	296
797	297
799	299
805	305
806	306
807	307
808	308
809	309
811	311
813	313
818	318
820	320
822	322

AN550	MS35494
2-2	1
2-3	2
2-4	3
2-5	4
2-6	5
3-3	901
3-4	902
3-5	903
3-6	904
3-7	905
3-8	906
4-2	8
4-3	9
4-4	10
4-5	11
4-6	12
4-7	13
4-8	14
4-10	15
4-12	16
5-3	20
5-4	21
5-5	22
5-6	23
5-7	24
5-8	25
6-3	31
6-4	32
6-5	33
6-6	34

PART NUMBER	
CANCELED	SUPSD BY
AN550	MS35494
6-7	35
6-8	36
6-10	37
6-12	38
6-14	39
6-16	40
6-18	41
6-20	42
8-3	55
8-4	56
8-5	57
8-6	58
8-7	59
8-8	60
8-10	61
8-12	62
8-14	63
8-16	64
8-18	65
8-20	66
8-22	67
8-24	68
10-4	81
10-5	82
10-6	83
10-7	84
10-8	85
10-10	86
10-12	87
10-14	88
10-16	89
10-18	90
10-20	91
10-22	92
10-24	93
10-28	94
12-5	97
12-6	98
12-7	99
12-8	100
12-10	101
12-12	102
12-14	103
12-16	104
12-18	105
12-20	106
12-22	107
12-24	108
12-28	109
12-32	110
14-6	111
14-7	112
14-8	113
14-10	114
14-12	115
14-14	116
14-16	117
14-18	118
14-20	119
14-22	120
14-24	121
14-28	122
14-32	123
14-36	124
14-40	125
16-8	128
16-10	129
16-12	130
16-14	131
16-16	132

PART NUMBER	
CANCELED	SUPSD BY
AN550	MS35494
16-18	133
16-20	134
16-22	135
16-24	136
16-28	137
16-32	138
16-36	139
16-40	140
B2-2	201
B2-3	202
B2-4	203
B2-5	204
B2-6	205
B3-3	910
B3-4	911
B3-5	912
B3-6	913
B4-2	208
B4-3	209
B4-4	210
B4-5	211
B4-6	212
B4-7	213
B4-8	214
B5-3	220
B5-4	221
B5-5	222
B5-6	223
B5-7	224
B5-8	225
B6-3	230
B6-4	231
B6-5	232
B6-6	233
B6-7	234
B6-8	235
B6-10	236
B6-12	237
B8-4	253
B8-5	254
B8-6	255
B8-7	256
B8-8	257
B8-10	258
B8-12	259
B8-14	260
B8-16	261
B10-5	275
B10-6	276
B10-7	277
B10-8	278
B10-10	279
B10-12	280
B10-14	281
B10-16	282
B10-18	283
B10-20	284
B12-6	289
B12-7	290
B12-8	291
B12-10	292
B12-12	293
B12-14	294
B12-16	295
B12-18	296
B12-20	297
B12-24	299
B12-28	300

REVIEWER: AV, EA, 15, MI
USER: AT, MC, ME, NU, PA, SH, VT

APPROVED 4 DEC 1956 REVISED (O) 20 MAY 1968 (E) FOR CHANGES SEE SHEETS 1 AND 2.

Military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC
Other Coast YD
82

TITLE: SCREW, WOOD, FLAT HEAD, SLOTTED, STEEL AND BRASS

MILITARY STANDARD
MS35494

PROCUREMENT SPECIFICATION: FF-S-111

SUPERSEDES: AN550 in part, BCC1 series and DNC11

SHEET 3 OF 3

DD FORM 672-1

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.