MILITARY STANDARD

TRUCKLOADING

TORPEDO, MAIN ASSEMBLY MK 37 MOD 2 AND MOD 3

MIL-STD-1320-203 (NAVY)

23 SEPTEMBER 1980

TORPEDO DATA


DIAMETER 19


LENGTH
- MK 37 MOD 2 135
- MK 37 MOD 3 109

WEIGHT
- MK 37 MOD 2 . . . . . 1250 LBS
- MK 37 MOD 3 . . . . . 990 LBS

CUBE
- MK 37 MOD 2 . . . . . 28.2 CU FT
- MK 37 MOD 3 . . . . . 22.7 CU FT

HAZARD CLASSIFICATION . . . . . INERT

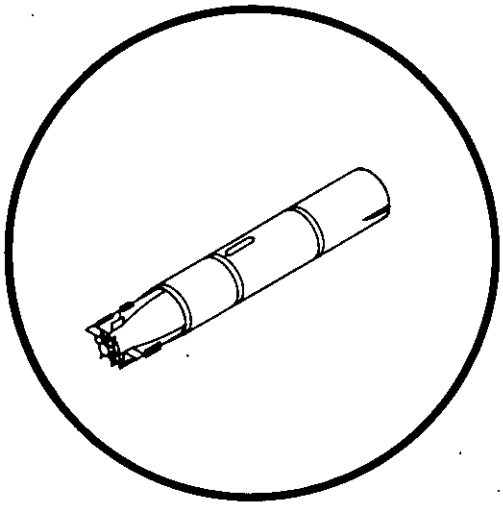

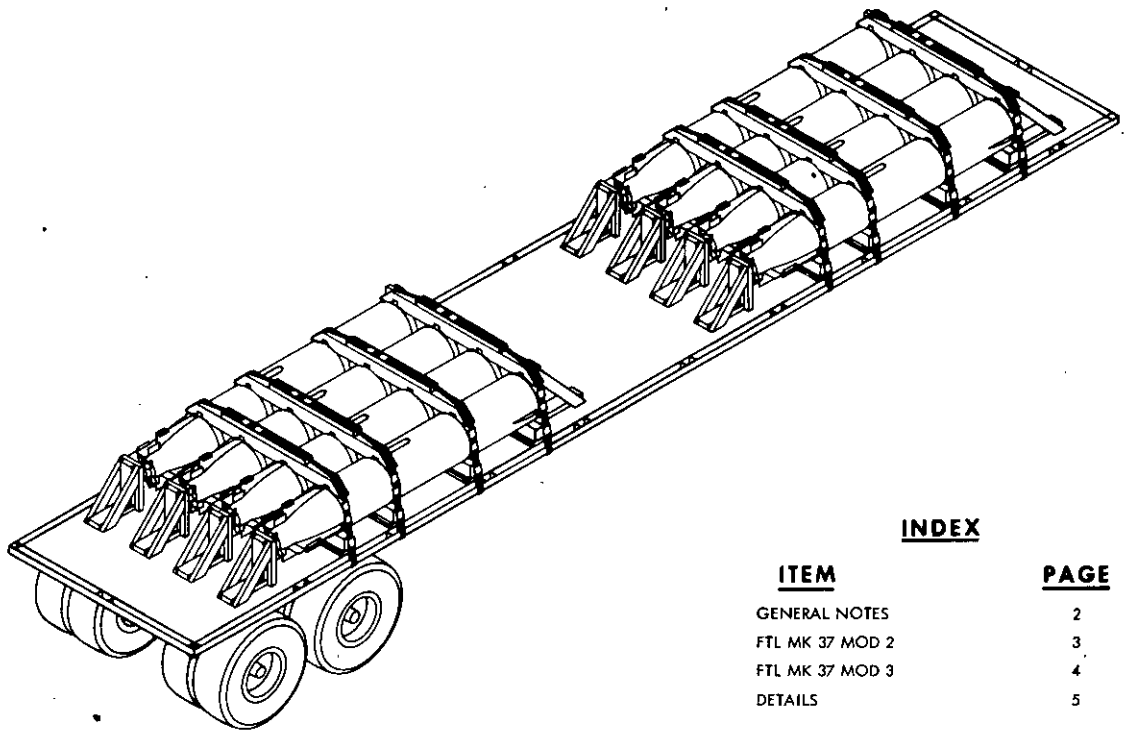

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL MK 37 MOD 2	3
FTL MK 37 MOD 3	4
DETAILS	5

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS. REFER TO INDEX TO STANDARDS, MIL-HDBK-236.

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M.S. Gray NWHC — 9/22/80
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

[illegible] — 9/24/80
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR — 19 Sep 80 DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 37 MOD 2 AND 3 TORPEDO MAIN ASSEMBLY (BARE) WITHOUT CONTAINER.

NOTE

THE FORWARD END OF THE TORPEDO MAIN ASSEMBLY (BATTERY COMPARTMENT) SHALL BE PROTECTED FROM THE WEATHER WITH PLASTIC FILM OR OTHER SUITABLE MEANS.

2. THE PROCEDURE AND PRACTICES CONTAINED HEREIN ARE INTENDED FOR 40 FT AND LONGER FLATBED TRAILERS. THE TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH NON NAILABLE FLOORS.
3. DOUBLE FLATBED TRAILERS MAY BE USED, STATE LAWS PERMITTING, BY LOADING ONE STACK OF TORPEDOS PER TRAILER USING THE APPROPRIATE PRINCIPLES OF THIS DOCUMENT.
4. ONLY STEEL STRAPS SHALL BE USED FOR TIEDOWNS. STRAPS SHALL BE 2 X .050 AND SHALL BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320.
5. THE RUBBER PADS SHOULD BE SYNTHETIC RUBBER MIL-R-6855, CL 2, GR80, TYPE A AND BONDED TO THE CHOCKS WITH ADHESIVE MMM-A-1617 TYPE I.
6. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILTY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THEY WILL NOT BE EXCEEDED.
7. AFTER THE BLOCKING, BRACING AND TIEDOWNS HAVE BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO THE DUNNAGE IN AN ACCESSIBLE AREA.
8. MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320. ADHESIVE SHALL BE IN ACCORDANCE WITH MMM-A-1617 TYPE I.
9. FOR GENERAL TRUCKLOADING PROCEDURES, REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320.

FTL & LTL 40 FT AND LONGER TRAILERS (FLATBED)

1. A FULL TRUCKLOAD FOR A TRAILER CONSISTS OF EIGHT (8) MK 37 MOD 2 TORPEDO MAIN ASSEMBLIES ON A 40 FT OR LONGER TRAILER AND TWELVE (12) MK 37 MOD 3 TORPEDO MAIN ASSEMBLIES ON A 42 FT OR LONGER TRAILER. LESS THAN THIS AMOUNT MAY BE SHIPPED BY MODIFYING THE TOP AND BOTTOM CHOCKS TO SUIT THE QUANTITY BEING SHIPPED. THE METHOD AND NUMBER OF TIEDOWNS SHALL BE THE SAME IN ALL CASES.

WARNING

WHEN USING TRAILERS LONGER THAN 40 FT. MAKE CERTAIN THAT THE LONGER LENGTH TRAILERS ARE PERMITTED IN THE STATES THROUGH WHICH IT WILL BE ROUTED.

2. PRIOR TO LOADING THE TORPEDOES, THE BOTTOM CHOCK ASSEMBLIES SHALL BE PREPOSITIONED ON THE TRAILER AND NAILED TO THE TRAILER FLOOR. WHEN LOADING:


   MK 37-2 TORPEDOES, USE DETAIL E
   MK 37-3 TORPEDOES, USE DETAIL F

   FOR PROPER LOCATION OF BOTTOM CHOCK ASSEMBLIES ON TRAILER.
3. WHEN POSITIONING THE TORPEDO MAIN ASSEMBLIES ON THE CHOCKS, THE FORWARD END (BATTERY COMPARTMENT) SHALL EXTEND ONE (1) INCH BEYOND THE FIRST CHOCK TO PERMIT THE KNEE BRACES TO BEAR AGAINST THE TORPEDOES.


WARNING

WHEN LOWERING THE TORPEDO ONTO THE CHOCKS, EXERCISE CARE TO SEE THAT THE BOTTOM RUNNER IS IN THE SLOT PROVIDED IN THE CHOCKS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

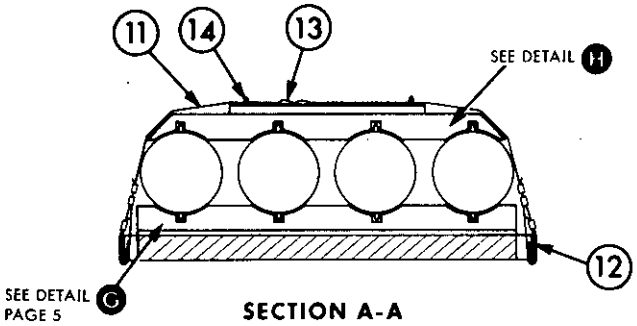

SECTION A-A

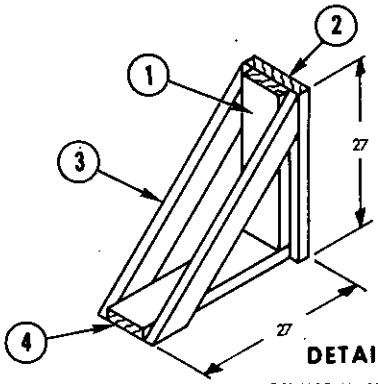

DETAIL B
FORWARD KNEE BRACE

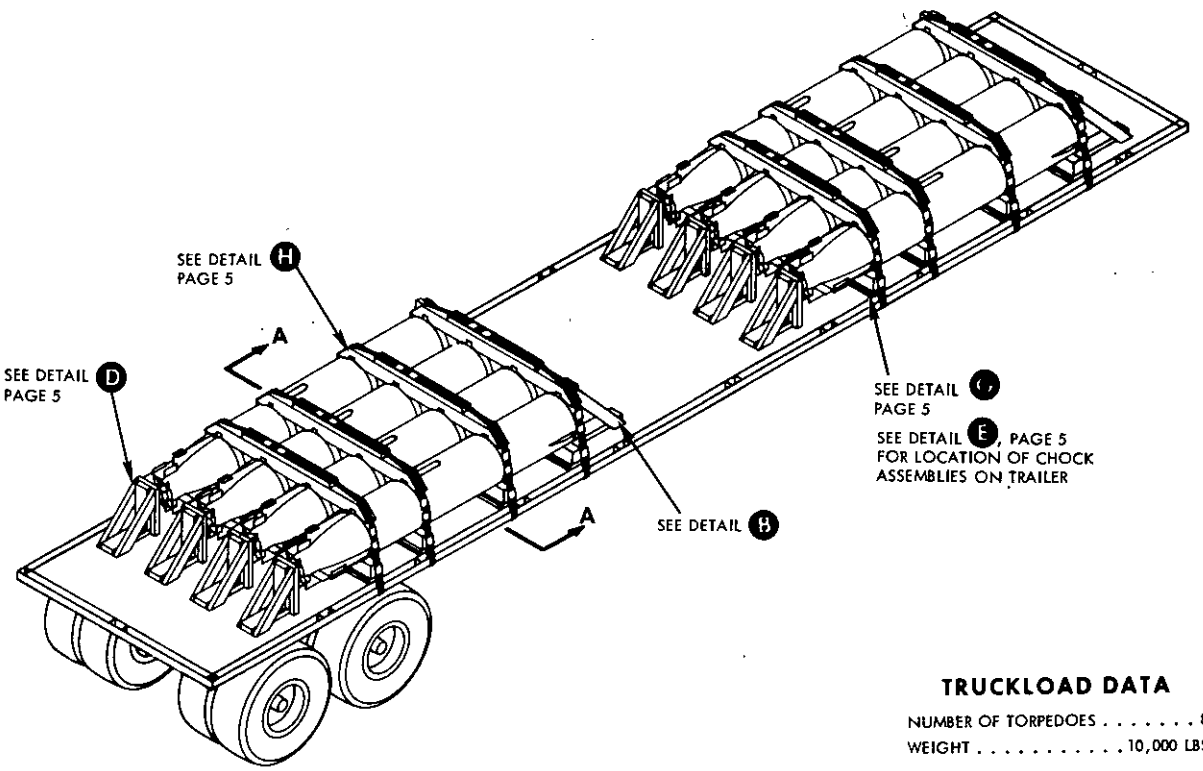

TRUCKLOAD DATA

NUMBER OF TORPEDOES 8
WEIGHT . . . . . 10,000 LBS

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
18	BRACE, CLEAT	2 X 6 X 18 1/2	8	TRAILER FLOOR	6	16d
17	BRACE, DIAGONAL	2 X 6 TO SUIT	16	15 &18	4/JOINT	16d
16	BRACE, BACKUP	2 X 10 X 20	8	18	3	16d
15	BRACE, UPRIGHT	2 X 6 X 18 1/2	8	16	6	10d
14	STAPLE	FOR 2" STRAP	16	-	-	-
13	SEAL	FOR 2" STRAP	64	-	-	-
12	PAD (STEEL STRAP)	2 X .050 X 18	16	-	-	-
11	STEEL STRAP	2 X .050 X 16FT 6	8	-	-	-
10	CLEAT	2 X 4 X 44	8	8	4	10d


LIST OF MATERIALS & NAILING DATA

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
9	PAD, RUBBER	1/4 X 3 1/2 X 5	64	SEE NOTE 5		
8	CHOCK, TOP	4 X 6 X 85	8	SEE 10	-	-
7	PAD, RUBBER	1/4 X 3 1/2 X 5	64	SEE NOTE 5		
6	CHOCK, BOTTOM	4 X 6 X 90	8	SEE 5	-	-
5	BASE, CHOCK	2 X 6 X 90	8	6	8	16d
				TRAILER FLOOR	8	16d
4	BRACE, CLEAT	2 X 6 X 25 1/2	8	TRAILER FLOOR	6	16d
3	BRACE, DIAGONAL	2 X 6 TO SUIT	16	1 & 4	4/JOINT	16d
2	BRACE, BACKUP	2 X 10 X 27	8	4	3	16d
1	BRACE, UPRIGHT	2 X 6 X 25 1/2	8	2	6	10d


LIST OF MATERIALS & NAILING DATA

FTL-40 FT OR LONGER TRAILER
MK 37 MOD 2 TORPEDO MAIN ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

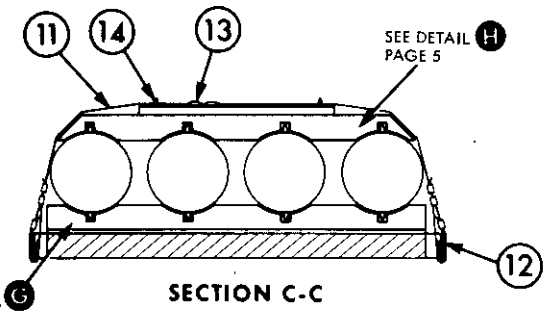

SECTION C-C



DETAIL D
AFT KNEE BRACE

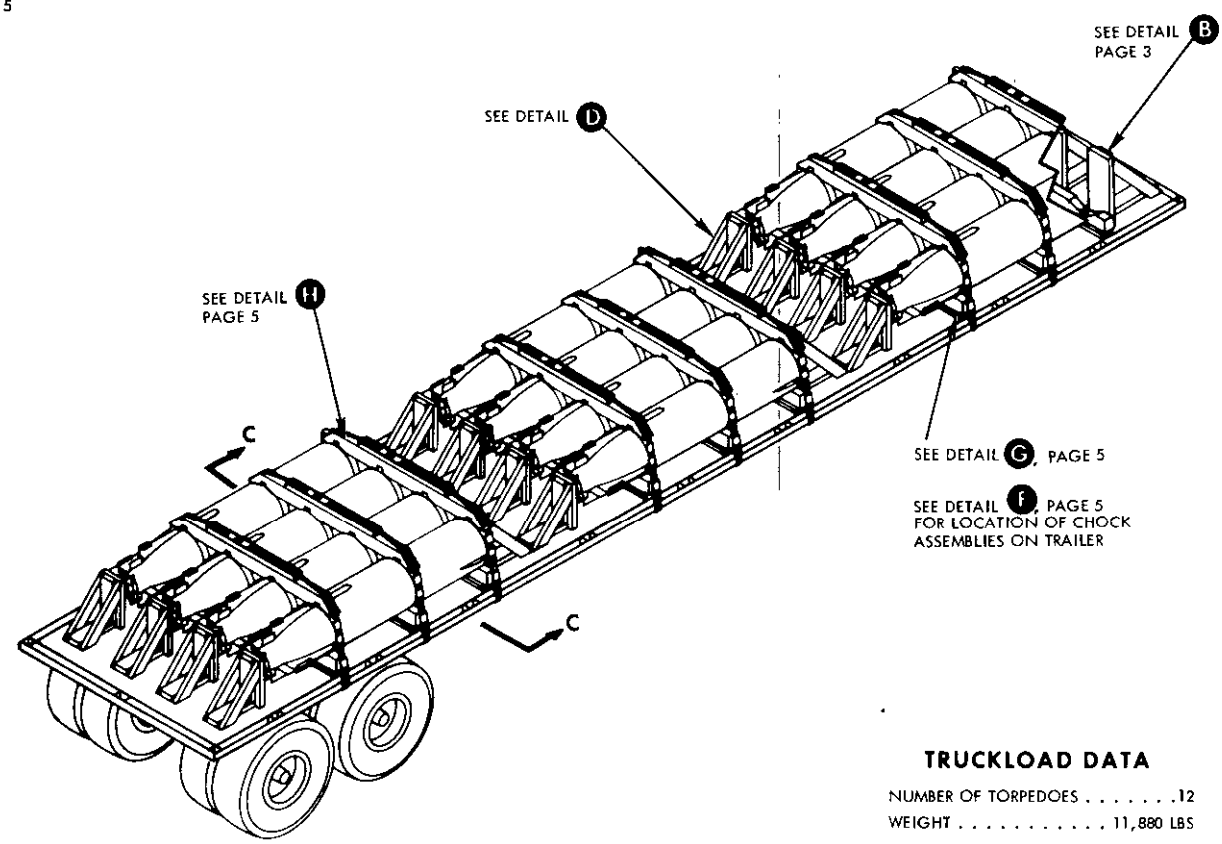

TRUCKLOAD DATA

NUMBER OF TORPEDOES 12
WEIGHT . . . . . 11,880 LBS

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
18	BRACE, CLEAT	2 X 6 X 18 1/2	12	TRAILER FLOOR	6	16d
17	BRACE, DIAGONAL	2 X 6 TO SUIT	24	15 & 18	4/JOINT	16d
16	BRACE, BACKUP	2 X 10 X 27	12	18	3	16d
15	BRACE, UPRIGHT	2 X 6 X 25 1/2	12	16	6	10d
14	STAPLE	FOR 2" STRAP	18	-	-	-
13	SEAL	FOR 2" STRAP	72	-	-	-
12	PAD (STEEL STRAP)	2 X .050 X 18	18	-	-	-
11	STEEL STRAP	2 X .050 X 16 FT 6	9	-	-	-
10	CLEAT	2 X 4 X 46	9	8	4	10d


LIST OF MATERIALS & NAILING DATA

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
9	PAD, RUBBER	1/4 X 3 1/2 X 5	72	SEE NOTE 5		
8	CHOCK, TOP	4 X 6 X 85	9	SEE 10	-	-
7	PAD, RUBBER	1/4 X 3 1/2 X 5	72	SEE NOTE 5		
6	CHOCK, BOTTOM	4 X 6 X 90	9	SEE 5	-	-
5	BASE, CHOCK	2 X 6 X 90	9	6	8	16d
				TRAILER FLOOR	8	16d
4	BRACE, CLEAT	2 X 6 X 25 1/2	12	TRAILER FLOOR	6	16d
3	BRACE, DIAGONAL	2 X 6 X TO SUIT	24	1 & 4	4/JOINT	16d
2	BRACE, BACKUP	2 X 10 X 27	12	4	3	16d
1	BRACE, UPRIGHT	2 X 6 X 25 1/2	12	2	6	10d

LIST OF MATERIALS & NAILING DATA


FTL 40 FT OR LONGER TRAILER
MK 37 MOD 3 TORPEDO MAIN ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

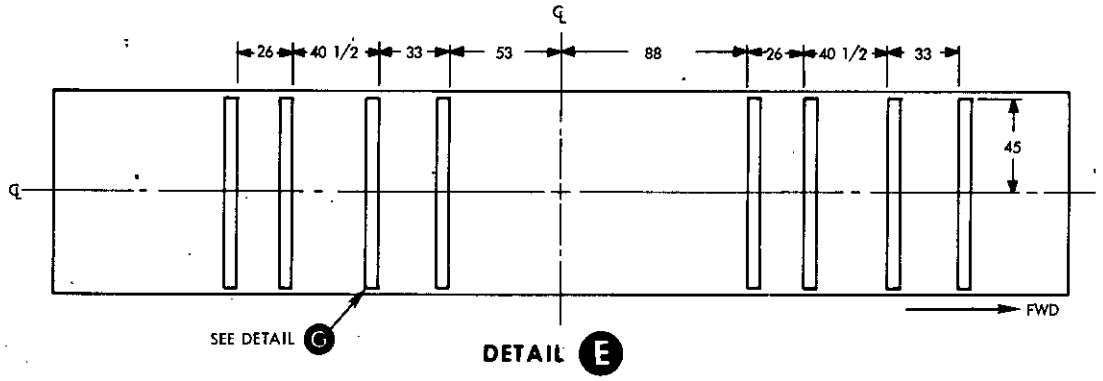


DETAIL E

LOCATION OF BOTTOM CHOCK ASSEMBLIES FOR TORPEDO MAIN ASSEMBLY MK 37 MOD 2

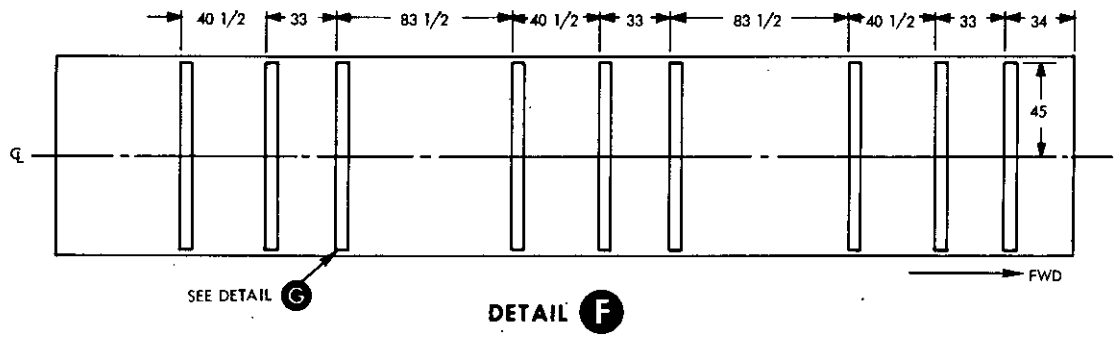


DETAIL F

LOCATION OF BOTTOM CHOCK ASSEMBLIES FOR TORPEDO MAIN ASSEMBLY MK 37 MOD 3

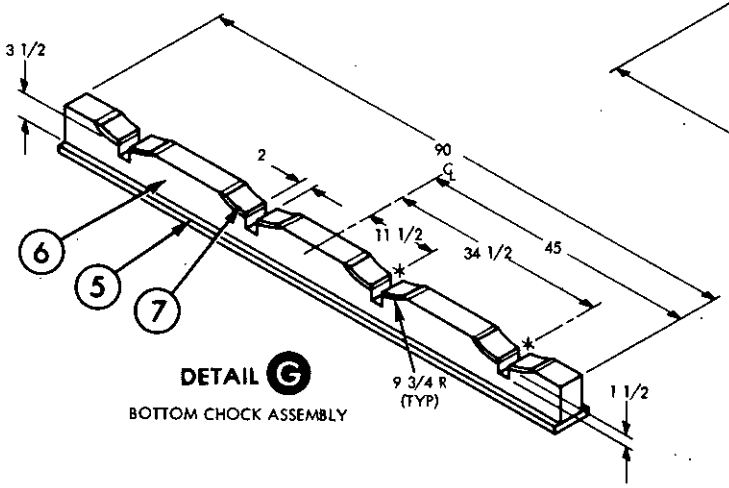

DETAIL G

BOTTOM CHOCK ASSEMBLY

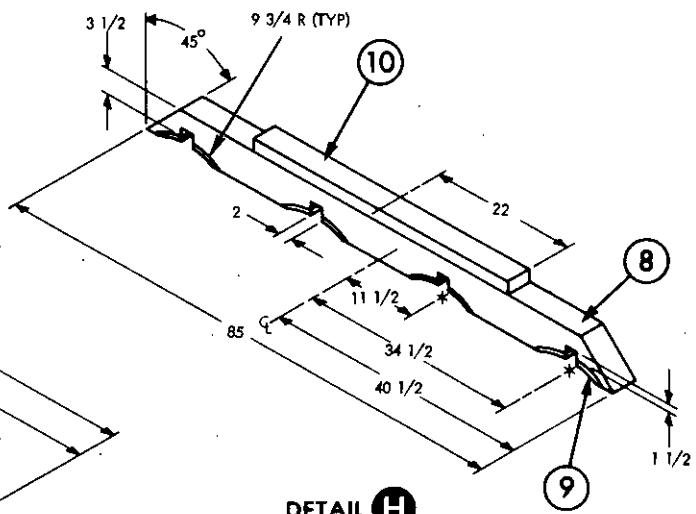

DETAIL H

TOP CHOCK ASSEMBLY

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N485)

☆U.S. GOVERNMENT PRINTING OFFICE: 1981-703-023/843

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.