MILITARY STANDARD

MIL-STD-1320-228
(NAVY)
11 JANUARY 1988

TRUCKLOADING


DOLLY, MISSILE TRANSFER, MK 30 MOD 0


ON SKID, TRANSPORT, DL6212586

UNIT LOAD FOR DOMESTIC AND OVERSEAS SHIPMENT

UNIT LOAD DATA

UNIT LOAD DOCUMENT MIL-STD-1322-91
DIMENSIONS . . . . . 229 L X 47 W X 61 3/4 H
GROSS WEIGHT . . . . . 2264 LBS Δ
CUBE . . . . . 384.6 CU FT
Δ DO NOT USE FOR SHIPPING WEIGHT

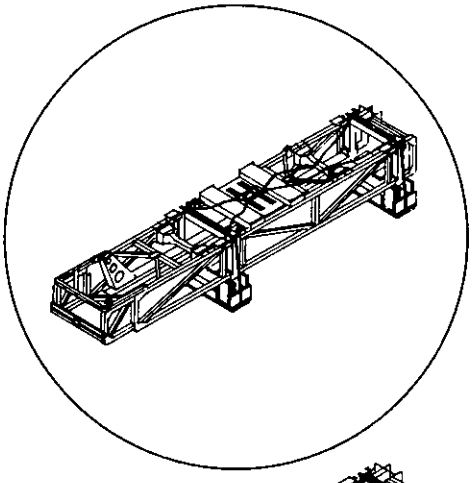

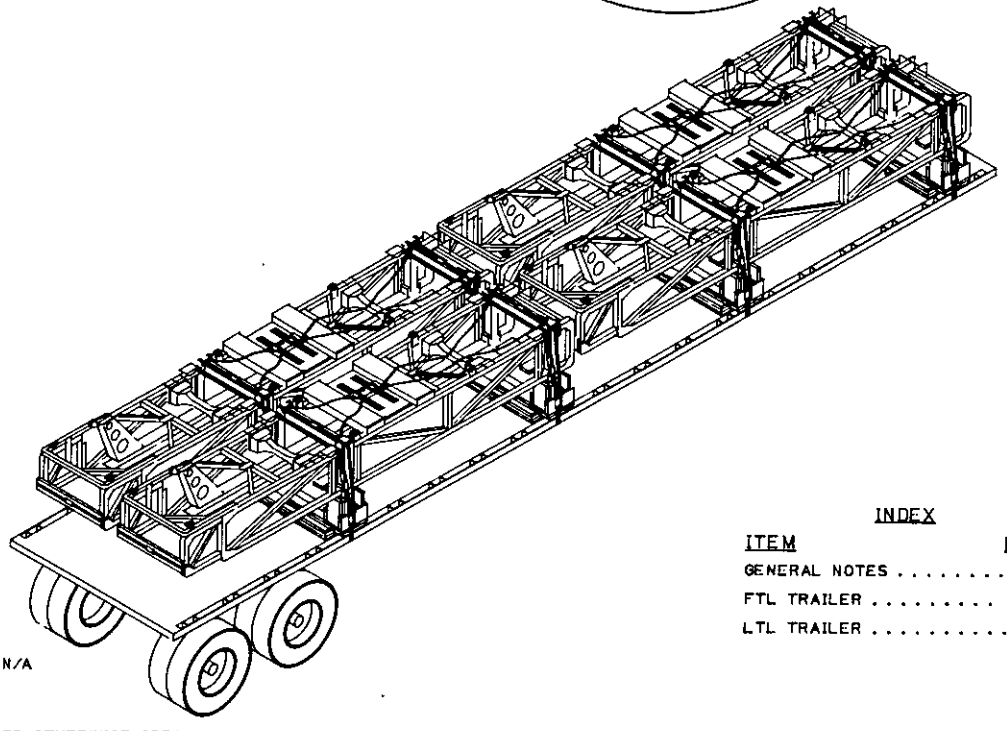

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4

AMSC NO. - N/A

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
Approved for public release: distribution is unlimited.

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE 1/5/88

SIGNATURE SEA 55COM BY DIRECTION DATE 1/11/88

ORIGINATOR DATE 1/5/88


NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING UNIT LOADS FOR DOMESTIC AND OVERSEAS SHIPMENT OF DOLLY, MISSILE TRANSFER, MK 30 MOD 0 WHEN THE DOLLY IS UNITIZED IN ACCORDANCE WITH MIL-STD-1322-91 (NAVY).
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT AND LONGER FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT TENSION ON THE SIDES AS SHOWN. CHAINS ARE NOT AUTHORIZED FOR USE AS TIE DOWNS.
4. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
6. AFTER THE BLOCKING, BRACING AND TIE DOWNS HAVE BEEN INSPECTED, ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSABLE AREA ON THE DECK OF THE TRAILER.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40 FT AND LONGER TRAILER (FLATBED)

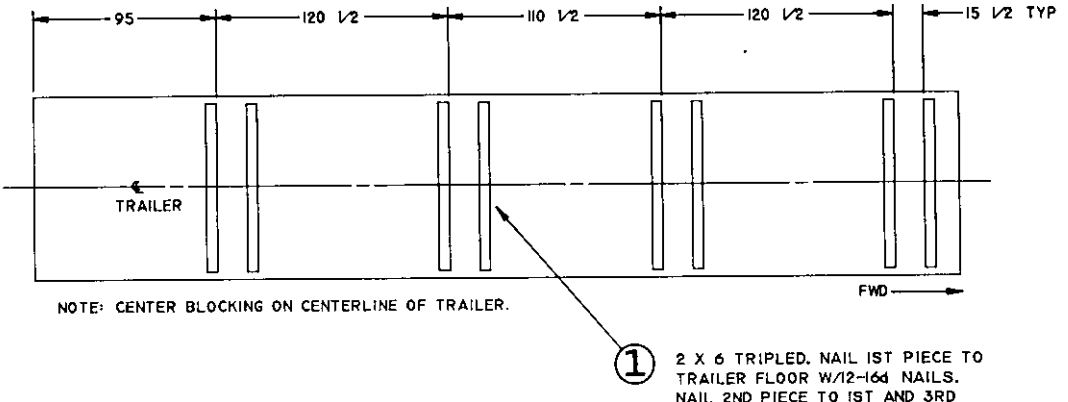


NOTE: CENTER BLOCKING ON CENTERLINE OF TRAILER.


TRAILER LENGTH	DIMENSION A
40 FT	95
42 FT	107
44 FT	119
45 FT	125
50 FT	155

DETAIL (A)

PREPOSITIONED FLOOR BLOCKING FOR 40 FT AND LONGER TRAILERS (40 FT TRAILER SHOWN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

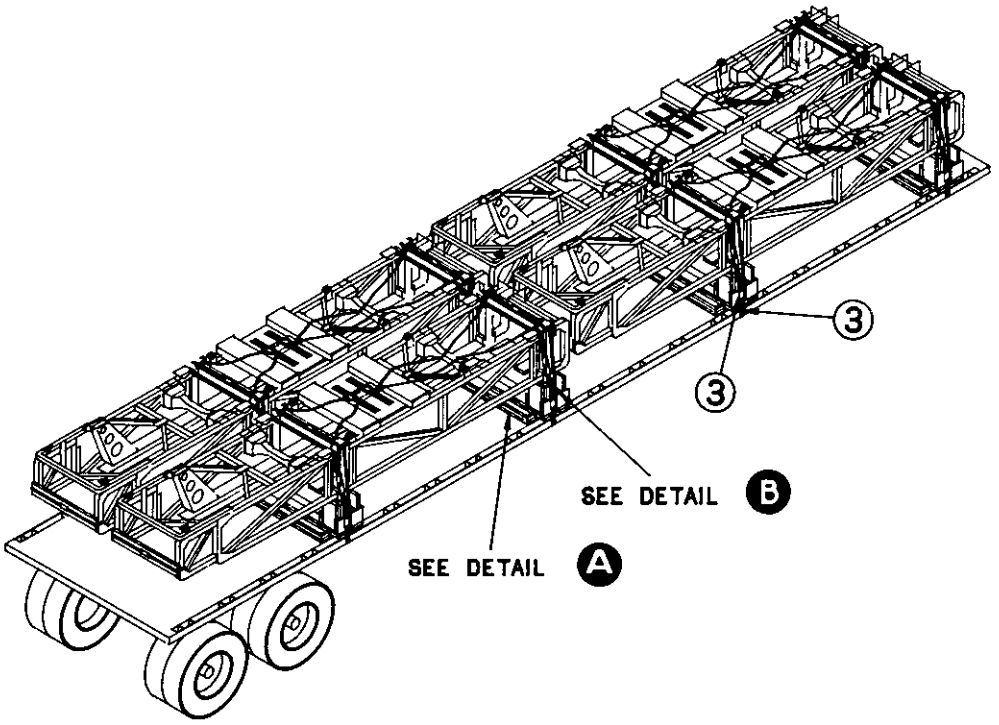



ANGLE THE TIE DOWN STRAPS, ITEM 2 TO AVOID THE SKID BEAM AS SHOWN.

DETAIL B

TRUCKLOAD DATA

40 FT THROUGH 50 FT TRAILER

NUMBER OF UNIT LOADS 4

WEIGHT . . . . . 9056 LBS Δ

Δ DO NOT USE FOR SHIPPING WEIGHT

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
24	3	SEAL	SEE NOTE 4 ON PAGE 2	2
4	2	TIE DOWN STRAP	SEE NOTES 3 & 4 ON PAGE 2	2 X .050 X 22 FT
24	1	PREPOSITIONED CROSSMEMBER	SEE NOTE 4 ON PAGE 2	2 X 6 X 88

LIST OF MATERIALS

FTL 40 FT AND LONGER TRAILER (FLATBED)
(40 FT TRAILER SHOWN)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT AND LONGER TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED, FROM TABLE I.
2. POSITION UNIT LOADS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON THIS PAGE AND PAGE 3 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
3. WHEN USING LOAD PATTERNS OF 1 OR 2 UNIT LOADS, CENTER THE PREPOSITIONED BLOCKING AND UNIT LOADS ON THE CENTERLINE OF THE TRAILER.


TABLE I

LOAD PATTERN *

NO. OF UL'S		NO. OF UL'S	
1		3	
2			

* LOAD PLAN SHOWS FLOOR PLAN FOR TRAILER.

TYPICAL CONSTRUCTION FOR ONE AND TWO UNIT LOADS

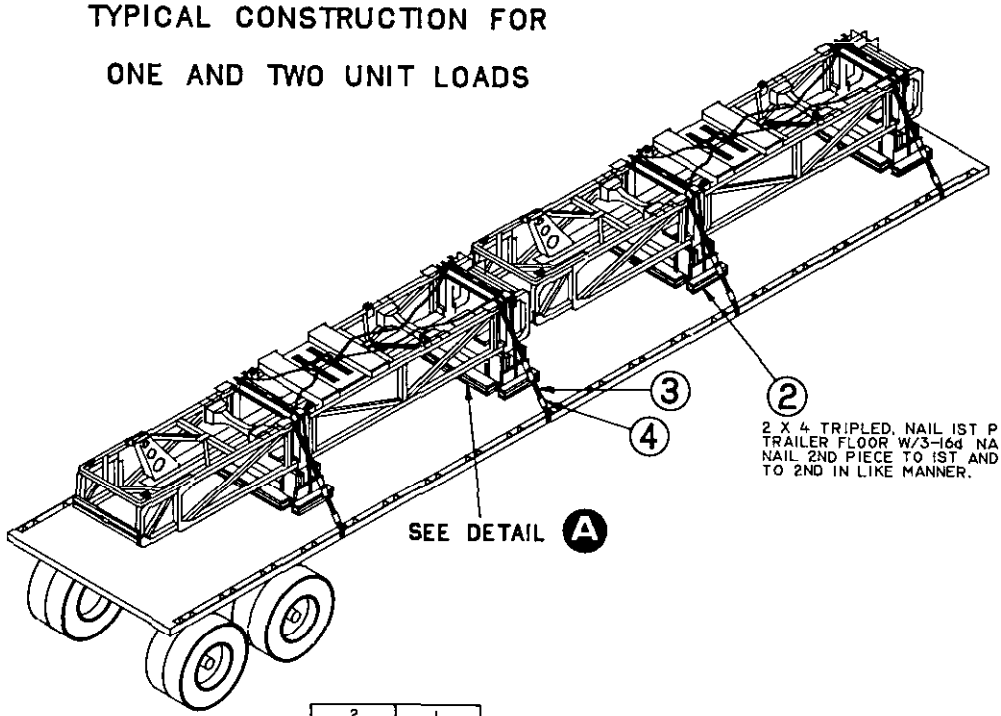

2 UL'S	1 UL				
24	12	4	SEAL	SEE NOTE 4 ON PAGE 2	2
4	2	3	TIE DOWN STRAP	SEE NOTES 3 & 4 ON PAGE 2	2 X .050 X 19 FT
24	12	2	SLEEPER, SIDE	SEE NOTE 4 ON PAGE 2	2 X 6 X 20
24	12	1	PREPOSITIONED CROSSMEMBER	SEE NOTE 4 ON PAGE 2	2 X 6 X 44
REQ'D	REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N744)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 - 505-033-90668

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.