FED SUP CLASS
5315

User activities
NAVY MC

Review activities
ARMY - AR, MI
DLA - IS
NS

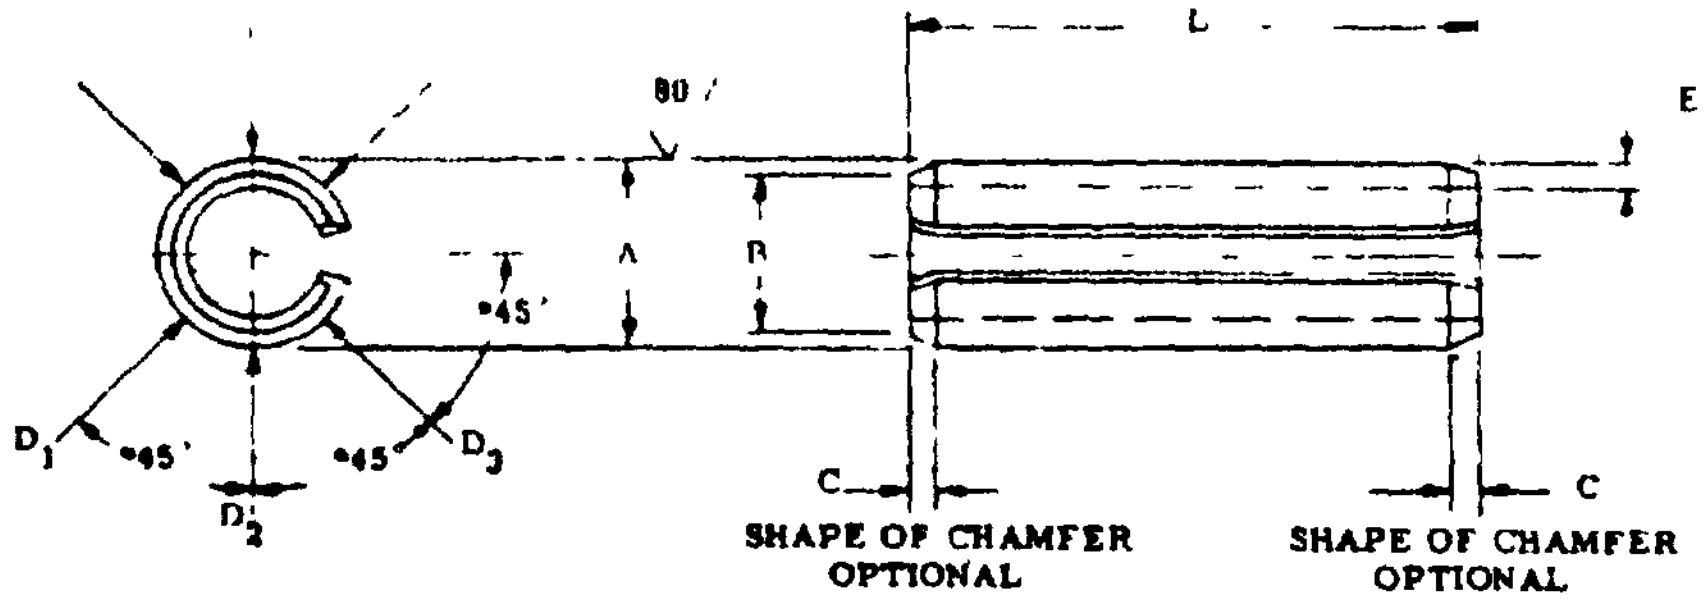

*APPROX

| A |  |  | B | C |  | E | RECOMMENDED HOLE SIZE |  | APPROX WEIGHT LBS PER 100 |
|---|---|---|---|---|---|---|---|---|---|
| NOMINAL | MAXIMUM (GO RING GAGE) | MIN AVERAGE DIA $(D_1+D_2+D_3)1/3$ | MAX | MIN | MAX | STOCK THICKNESS | MIN | MAX |  |
| 062 | 069 | 066 | 059 | 007 | 028 | 012 | 062 | 065 | L x 049 |
| .078 | 086 | 083 | 075 | 008 | 032 | 018 | 078 | 081 | L x 092 |
| 094 | .103 | 099 | .091 | 008 | 038 | 022 | 094 | 097 | L x 140 |
| 125 | .135 | 131 | .122 | .008 | 044 | 028 | 125 | 129 | L x 240 |
| 156 | 167 | 162 | .151 | 010 | 048 | 032 | 156 | 160 | L x 340 |
| 188 | 199 | 194 | 182 | 011 | 055 | 040 | 187 | 192 | L x 510 |
| 219 | .232 | .226 | 214 | .011 | 065 | 048 | 219 | 224 | L x 700 |
| 250 | 264 | 258 | .245 | 012 | .065 | 048 | 250 | 256 | L x 850 |
| 312 | .328 | 321 | 306 | .014 | 080 | 062 | 312 | 318 | L x 1.30 |
| 375 | 392 | 385 | 368 | 016 | 095 | 077 | 375 | 382 | L x 1 90 |
| 438 | 456 | 448 | 430 | 017 | 095 | 077 | 437 | 445 | L x 2.40 |
| 500 | 521 | .512 | .485 | .025 | 110 | 094 | 500 | 510 | L x 3.20 |

NOTES:

1 MATERIAL CORROSION RESISTANT STEEL AMS 5506.

2 SURFACE ROUGHNESS AS 291

3 MANUFACTURING SPECIFICATION AMS 7207.

4. BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED

5. DIMENSIONS IN INCHES

6. SEE SHEET 2 FOR PART NUMBER.

Ⓒ 7 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL

Ⓒ 8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

Ⓒ Denotes Changes

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

APPROVED 15 MAY 53 REVISED (A) 2 MAR 64 B) 4 AUG 65 (C) 3 NOV 80

| | | |
|---|---|---|
| P A II<br>Other Cust AS | TITLE<br>PIN SPRING, CORROSION RESISTANT STEEL | MILITARY STANDARD<br>MS 171401 THRU 171900 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES<br>MS9047 AND MS9048 C | SHEET 1 OF 5 |

DD FORM 672-1

5315 0331

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review activities
ARMY - AR, MI
DLA - IS
NS

User activities
NAVY - MC

FED SUP CLASS
5315

| LENGTH | NOMINAL DIAMETER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | .062 | .078 | .094 | .125 | .156 | .188 | .219 | .250 | .312 | .375 | .438 | .500 |
| .125 .015 | MS171430 | | | | | | | | | | | |
| .188 .015 | MS171431 | | | | | | | | | | | |
| .250 .015 | MS171432 | MS171462 | MS171492 | MS171522 | | | | | | | | |
| .312 .015 | MS171433 | MS171463 | MS171493 | MS171523 | MS171553 | MS171583 | | | | | | |
| .375 .015 | MS171434 | MS171464 | MS171494 | MS171524 | MS171554 | MS171584 | MS171614 | MS171644 | | | | |
| .438 .015 | MS171435 | MS171465 | MS171495 | MS171525 | MS171555 | MS171585 | MS171615 | MS171645 | | | | |
| .500 .015 | MS171436 | MS171466 | MS171496 | MS171526 | MS171556 | MS171586 | MS171616 | MS171646 | | | | |
| .562 .015 | MS171437 | MS171467 | MS171497 | MS171527 | MS171557 | MS171587 | MS171617 | MS171647 | MS171677 | MS171707 | | |
| .625 .015 | MS171438 | MS171468 | MS171498 | MS171528 | MS171558 | MS171588 | MS171618 | MS171648 | MS171678 | MS171708 | | |
| .688 .015 | MS171439 | MS171469 | MS171499 | MS171529 | MS171559 | MS171589 | MS171619 | MS171649 | MS171679 | MS171709 | | |
| .750 .015 | MS171440 | MS171470 | MS171500 | MS171530 | MS171560 | MS171590 | MS171620 | MS171650 | MS171680 | MS171710 | | |
| .812 .015 | MS171441 | MS171471 | MS171501 | MS171531 | MS171561 | MS171591 | MS171621 | MS171651 | MS171681 | MS171711 | | |
| .875 .015 | MS171442 | MS171472 | MS171502 | MS171532 | MS171562 | MS171592 | MS171622 | MS171652 | MS171682 | MS171712 | | |
| .938 .015 | MS171443 | MS171473 | MS171503 | MS171533 | MS171563 | MS171593 | MS171623 | MS171653 | MS171683 | MS171713 | | |
| 1.000 .015 | MS171444 | MS171474 | MS171504 | MS171534 | MS171564 | MS171594 | MS171624 | MS171654 | MS171684 | MS171714 | MS171744 | |
| 1.125 .020 | MS171445 | MS171475 | MS171505 | MS171535 | MS171565 | MS171595 | MS171625 | MS171655 | MS171685 | MS171715 | MS171745 | |
| 1.250 .020 | | MS171476 | MS171506 | MS171536 | MS171566 | MS171596 | MS171626 | MS171656 | MS171686 | MS171716 | MS171746 | MS171776 |
| 1.375 .020 | | MS171477 | MS171507 | MS171537 | MS171567 | MS171597 | MS171627 | MS171657 | MS171687 | MS171717 | MS171747 | MS171777 |
| 1.500 .020 | | MS171478 | MS171508 | MS171538 | MS171568 | MS171598 | MS171628 | MS171658 | MS171688 | MS171718 | MS171748 | MS171778 |
| 1.625 .020 | | MS171479 | MS171509 | MS171539 | MS171569 | MS171599 | MS171629 | MS171659 | MS171689 | MS171719 | MS171749 | MS171779 |
| 1.750 .020 | | MS171480 | MS171510 | MS171540 | MS171570 | MS171600 | MS171630 | MS171660 | MS171690 | MS171720 | MS171750 | MS171780 |
| 1.875 .020 | | MS171481 | MS171511 | MS171541 | MS171571 | MS171601 | MS171631 | MS171661 | MS171691 | MS171721 | MS171751 | MS171781 |
| 2.000 .020 | | MS171482 | MS171512 | MS171542 | MS171572 | MS171602 | MS171632 | MS171662 | MS171692 | MS171722 | MS171752 | MS171782 |
| 2.250 .025 | | | | | MS171573 | MS171603 | MS171633 | MS171663 | MS171693 | MS171723 | MS171753 | MS171783 |
| 2.500 .025 | | | | | MS171574 | MS171604 | MS171634 | MS171664 | MS171694 | MS171724 | MS171754 | MS171784 |
| 2.750 .025 | | | | | | MS171605 | MS171635 | MS171665 | MS171695 | MS171725 | MS171755 | MS171785 |
| 3.000 .025 | | | | | | MS171606 | MS171636 | MS171666 | MS171696 | MS171726 | MS171756 | MS171786 |
| 3.250 .030 | | | | | | MS171607 | MS171637 | MS171667 | MS171697 | MS171727 | MS171757 | MS171787 |
| 3.500 .030 | | | | | | MS171608 | MS171638 | MS171668 | MS171698 | MS171728 | MS171758 | MS171788 |
| 3.750 .030 | | | | | | | | | MS171699 | MS171729 | MS171759 | MS171789 |
| 4.000 .030 | | | | | | | | | MS171700 | MS171730 | MS171760 | MS171790 |

PART NUMBERS WITHIN ENVELOPE ARE THOSE CARRIED IN STOCK BY INDUSTRY. AVAILABILITY OF PART NUMBERS OUTSIDE THE ENVELOPE SHOULD BE CHECKED BEFORE SPECIFYING.

DO NOT USE UNASSIGNED PART NUMBERS

APPROVED 15 MAY 53

C FOR CHANGES SEE SHEETS 1, 2, 3, 4, AND 5

| | | |
|---|---|---|
| P A TI<br>Other Cust AS | TITLE<br>PIN, SPRING, CORROSION RESISTANT STEEL | MILITARY STANDARD<br>MS 171401 THRU 171900 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES<br>MS9047 AND MS9048 C1 | SHEET 2 OF 5 |

Cust activities
NAVY MC

Review activities
ARMY - AR, MI
DLA - IS
NS

FED SUP CLASS
5315

C

## INTERCHANGEABILITY TABLE

| MS9047 AND MS9048 DASH NUMBERS | SUPERSEDING PART NUMBER |
|---|---|
| 002 | MS171431 |
| 003 | MS171432 |
| 004 | MS171433 |
| 005 | MS171434 |
| 006 | MS171435 |
| 007 | MS171436 |
| 008 | MS171437 |
| 009 | MS171438 |
| 010 | MS171439 |
| 011 | MS171440 |
| 012 | MS171441 |
| 013 | MS171442 |
| 014 | MS171443 |
| 015 | MS171444 |
| 016 | MS171445 |
| 034 | MS171462 |
| 035 | MS171463 |
| 036 | MS171464 |
| 037 | MS171465 |
| 038 | MS171466 |
| 039 | MS171467 |
| 040 | MS171468 |
| 041 | MS171469 |
| 042 | MS171470 |
| 043 | MS171471 |
| 044 | MS171472 |
| 045 | MS171473 |
| 046 | MS171474 |
| 047 | MS171475 |
| 048 | MS171476 |
| 049 | MS171477 |
| 050 | MS171478 |
| 051 | MS171479 |
| 052 | MS171480 |
| 053 | MS171481 |
| 054 | MS171482 |
| 065 | MS171492 |
| 066 | MS171493 |
| 067 | MS171494 |
| 068 | MS171495 |
| 069 | MS171496 |
| 070 | MS171497 |
| 071 | MS171498 |
| 072 | MS171499 |
| 073 | MS171500 |
| 074 | MS171501 |
| 075 | MS171502 |
| 076 | MS171503 |
| 077 | MS171504 |
| 078 | MS171505 |
| 079 | MS171506 |
| 080 | MS171507 |
| 081 | MS171508 |
| 082 | MS171509 |
| 083 | MS171510 |
| 084 | MS171511 |
| 085 | MS171512 |
| 096 | MS171522 |
| 097 | MS171523 |
| 098 | MS171524 |
| 099 | MS171525 |
| 100 | MS171526 |
| 101 | MS171527 |
| 102 | MS171528 |
| 103 | MS171529 |
| 104 | MS171530 |
| 105 | MS171531 |
| 106 | MS171532 |
| 107 | MS171533 |
| 108 | MS171534 |
| 109 | MS171535 |
| 110 | MS171536 |
| 111 | MS171537 |
| 112 | MS171538 |
| 113 | MS171539 |
| 114 | MS171540 |
| 115 | MS171541 |
| 116 | MS171542 |
| 128 | MS171553 |
| 129 | MS171554 |
| 130 | MS171555 |
| 131 | MS171556 |
| 132 | MS171557 |
| 133 | MS171558 |
| 134 | MS171559 |
| 135 | MS171560 |
| 136 | MS171561 |
| 137 | MS171562 |
| 138 | MS171563 |
| 139 | MS171564 |
| 140 | MS171565 |
| 141 | MS171566 |
| 142 | MS171567 |
| 143 | MS171568 |
| 144 | MS171569 |
| 145 | MS171570 |
| 146 | MS171571 |
| 147 | MS171572 |
| 148 | MS171573 |
| 149 | MS171574 |

APPROVED 15 MAY 53

(C) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

| | | |
|---|---|---|
| P.A. 11<br>Other Cust AS | TITLE<br>PIN - SPRING CORROSION RESISTANT STEEL | **MILITARY STANDARD**<br>MS 171401 THRU 171900 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES<br>MS9047 AND MS9048 C | SHEET 3 OF 5 |

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:45Z
Check the source to verify that this is the currentversion before use.

FED SUP CLASS
5315

C

## INTERCHANGEABILITY TABLE (CONTINUED)

| MS9047 AND MS9048 DASH NUMBERS | SUPERSEDING PART NUMBERS |
|---|---|
| 159 | MS171583 |
| 160 | MS171584 |
| 161 | MS171585 |
| 162 | MS171586 |
| 163 | MS171587 |
| 164 | MS171588 |
| 165 | MS171589 |
| 166 | MS171590 |
| 167 | MS171591 |
| 168 | MS171592 |
| 169 | MS171593 |
| 170 | MS171594 |
| 171 | MS171595 |
| 172 | MS171596 |
| 173 | MS171597 |
| 174 | MS171598 |
| 175 | MS171599 |
| 176 | MS171600 |
| 177 | MS171601 |
| 178 | MS171602 |
| 179 | MS171603 |
| 180 | MS171604 |
| 181 | MS171605 |
| 182 | MS171606 |
| 183 | MS171607 |
| 184 | MS171608 |
| 191 | MS171614 |
| 192 | MS171615 |
| 193 | MS171616 |
| 194 | MS171617 |
| 195 | MS171618 |
| 196 | MS171619 |
| 197 | MS171620 |
| 198 | MS171621 |
| 199 | MS171622 |
| 200 | MS171623 |
| 201 | MS171624 |
| 202 | MS171625 |
| 203 | MS171626 |
| 204 | MS171627 |
| 205 | MS171628 |
| 206 | MS171629 |
| 207 | MS171630 |
| 208 | MS171631 |
| 209 | MS171632 |
| 210 | MS171633 |
| 211 | MS171634 |
| 212 | MS171635 |
| 213 | MS171636 |
| 214 | MS171637 |
| 215 | MS171638 |

| MS9047 AND MS9048 DASH NUMBERS | SUPERSEDING PART NUMBERS |
|---|---|
| 222 | MS171644 |
| 223 | MS171645 |
| 224 | MS171646 |
| 225 | MS171647 |
| 226 | MS171648 |
| 227 | MS171649 |
| 228 | MS171650 |
| 229 | MS171651 |
| 230 | MS171652 |
| 231 | MS171653 |
| 232 | MS171654 |
| 233 | MS171655 |
| 234 | MS171656 |
| 235 | MS171657 |
| 236 | MS171658 |
| 237 | MS171659 |
| 238 | MS171660 |
| 239 | MS171661 |
| 240 | MS171662 |
| 241 | MS171663 |
| 242 | MS171664 |
| 243 | MS171665 |
| 244 | MS171666 |
| 245 | MS171667 |
| 246 | MS171668 |
| 256 | MS171677 |
| 257 | MS171678 |
| 258 | MS171679 |
| 259 | MS171680 |
| 260 | MS171681 |
| 261 | MS171682 |
| 262 | MS171683 |
| 263 | MS171684 |
| 264 | MS171685 |
| 265 | MS171686 |
| 266 | MS171687 |
| 267 | MS171688 |
| 268 | MS171689 |
| 269 | MS171690 |
| 270 | MS171691 |
| 271 | MS171692 |
| 272 | MS171693 |
| 273 | MS171694 |
| 274 | MS171695 |
| 275 | MS171696 |
| 276 | MS171697 |
| 277 | MS171698 |
| 278 | MS171699 |
| 279 | MS171700 |

User activities
NAVY [illegible]

Review activities
ARMY - AR, MI
DLA - IS
NS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 15 MAY 53 (C) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

| | | |
|---|---|---|
| P.A. 11<br>Other Cust AS | TITLE<br>PIN-SPRING, CORROSION RESISTANT STEEL | MILITARY STANDARD<br>MS 171401 THRU 171900 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES<br>MS9047 AND MS9048 C | SHEET 4 OF 5 |

DD FORM 672-1 (Continued) [illegible] 5315 [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

User activities
NAVY - MC

Review activities
ARMY - AR, MI
DLA - IS
NS

C

## INTERCHANGEABILITY TABLE (CONTINUED)

| MS9047 AND MS9048 DASH NUMBERS | SUPERSEDING PART NUMBER |
|---|---|
| 287 | MS171707 |
| 288 | MS171708 |
| 289 | MS171709 |
| 290 | MS171710 |
| 291 | MS171711 |
| 292 | MS171712 |
| 293 | MS171713 |
| 294 | MS171714 |
| 295 | MS171715 |
| 296 | MS171716 |
| 297 | MS171717 |
| 298 | MS171718 |
| 299 | MS171719 |
| 300 | MS171720 |
| 301 | MS171721 |
| 302 | MS171722 |
| 303 | MS171723 |
| 304 | MS171724 |
| 305 | MS171725 |
| 306 | MS171726 |
| 307 | MS171727 |
| 308 | MS171728 |
| 309 | MS171729 |
| 310 | MS171730 |
| 325 | MS171744 |
| 326 | MS171745 |
| 327 | MS171746 |
| 328 | MS171747 |
| 329 | MS171748 |
| 330 | MS171749 |
| 331 | MS171750 |
| 332 | MS171751 |
| 333 | MS171752 |
| 334 | MS171753 |
| 335 | MS171754 |
| 336 | MS171755 |
| 337 | MS171756 |
| 338 | MS171757 |
| 339 | MS171758 |
| 340 | MS171759 |
| 341 | MS171760 |
| 358 | MS171776 |
| 359 | MS171777 |
| 360 | MS171778 |
| 361 | MS171779 |
| 362 | MS171780 |
| 363 | MS171781 |
| 364 | MS171782 |
| 365 | MS171783 |
| 366 | MS171784 |
| 367 | MS171785 |
| 368 | MS171786 |
| 369 | MS171787 |
| 370 | MS171788 |
| 371 | MS171789 |
| 372 | MS171790 |

☆U S GOVERNMENT PRINTING OFFICE 1980 — 703 023/4749

C1 FOR CHANGES SEE SHEETS 1, 2, 3 4 AND 5

APPROVED 15 MAY 53

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P.A. 11
Other Cust AS

TITLE
PIN-SPRING CORROSION RESISTANT STEEL

# MILITARY STANDARD

MS 171401 THRU 171900

SHEET 5 OF 5

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES
MS9047 AND MS9048

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

C 5, ) 71