THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

THIS ILLUSTRATION OF THE HANDLE IS FOR IDENTIFICATION PURPOSES ONLY AND IS NOT INTENDED TO RESTRICT DESIGNS AND SHAPES WHICH WILL OTHERWISE CONFORM TO SPECIFICATION REQUIREMENTS AND ARE WITHIN THE ENVELOPE DIMENSIONS.

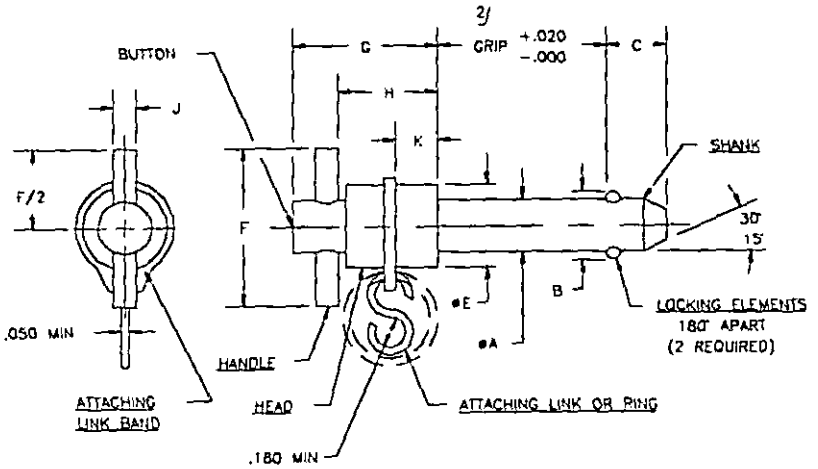



TABLE I. DIMENSIONS AND MECHANICAL PROPERTIES.

| | NOM DIA | ØA | | B | C | ØE | | F | | G | H | J | K | | DOUBLE SHEAR MIN | TENSILE STRENGTH | RECOMMENDED HOLE DIAMETER | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | MAX | MIN | ±.005 | MAX | MAX | MIN | MAX | MIN | MAX | MIN | MIN | MAX | MIN | | MIN | MAX | MIN |
| 1/ | 3/16 | .1885 | .1870 | .220 | .410 | .450 | .360 | 1.750 | 1.375 | 1.030 | .780 | .105 | .480 | .415 | 5,150 | 200 | .194 | .190 |
| | 1/4 | .2485 | .2470 | .289 | .410 | .450 | .360 | 1.750 | 1.375 | 1.030 | .780 | .105 | .480 | .415 | 9,200 | 230 | .254 | .250 |
| | 5/16 | .3110 | .3095 | .375 | .440 | .505 | .390 | 1.750 | 1.375 | 1.030 | .780 | .105 | .480 | .415 | 14,400 | 510 | .3165 | .3125 |
| | 3/8 | .3735 | .3720 | .440 | .510 | .630 | .510 | 2.000 | 1.875 | 1.090 | .830 | .134 | .540 | .445 | 20,600 | 575 | .379 | .375 |
| 1/ | 7/16 | .4360 | .4345 | .509 | .510 | .630 | .510 | 2.000 | 1.875 | 1.090 | .830 | .134 | .540 | .445 | 28,000 | 710 | .4425 | .4375 |
| | 1/2 | .4985 | .4970 | .594 | .590 | .755 | .640 | 2.250 | 2.125 | 1.270 | .880 | .200 | .540 | .445 | 36,800 | 1,160 | .505 | .500 |
| 1/ | 9/16 | .5610 | .5595 | .686 | .660 | .755 | .640 | 2.250 | 2.125 | 1.270 | .880 | .200 | .540 | .445 | 46,000 | 1,420 | .5675 | .5625 |
| | 5/8 | .6235 | .6220 | .750 | .750 | .870 | .805 | 2.500 | 2.375 | 1.465 | 1.000 | .231 | .575 | .510 | 57,500 | 2,070 | .630 | .625 |
| | 3/4 | .7485 | .7470 | .887 | .790 | .960 | .890 | 2.500 | 2.375 | 1.465 | 1.000 | .231 | .595 | .530 | 82,500 | 2,950 | .757 | .750 |
| | 7/8 | .8735 | .8720 | 1.046 | .950 | 1.150 | 1.070 | 2.875 | 2.750 | 1.640 | 1.160 | .231 | .730 | .665 | 112,500 | 3,900 | .882 | .875 |
| | 1 | .9985 | .9970 | 1.219 | 1.100 | 1.280 | 1.200 | 2.875 | 2.750 | 1.830 | 1.320 | .231 | .865 | .800 | 147,000 | 5,480 | 1.010 | 1.000 |

1/ FOR COST PURPOSES 1/4, 1/2 AND 5/8 INCH PINS ARE PREFERRED OVER 3/16, 7/16 AND 9/16 INCH PINS RESPECTIVELY.

2/ GRIP SHALL BE MEASURED TO THE EDGE OF THE LOCKING ELEMENT HOLE PRIOR TO STAKING.

(E) ENTIRE SPECIFICATION REVISED

INCH-POUND

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- AV NAVY- AS
AIR FORCE- 99 DLA-
REVIEW: ARMY - GL, AIR FORCE-82
USER:
PROJECT NUMBER: 5315-0483

MILITARY SPECIFICATION SHEET

TITLE

PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE

SPECIFICATION SHEET NUMBER
MS17988 1 JUN 94 REV E

SUPERSEDING
MS179880 15 NOV 91

AMSC- N/A FSC 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:11Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIAL:

ATTACHING LINK OR RING:
CRES 17-7PH (UNS S17700) PER AMS 5678 OR
CRES 302 (UNS S30200) PER ASTM A313.

ATTACHING LINK BAND:
CRES 302 (UNS S30200) OR
CRES 303 (UNS S30300) PER QQ-P-766.

HANDLE AND HEAD:
CRES 302 (UNS S30200) PER QQ-S-763 OR
CRES 303 (UNS S30300) PER ASTM A484 OR ASTM A582.

BUTTON:
ALUMINUM ALLOY 2017 (UNS A92017) PER QQ-A-225/5.
ALUMINUM ALLOY 2024 (UNS A92024) PER QQ-A-225/6.
CRES 302 (UNS S30200) PER QQ-S-763 OR
CRES 303 (UNS S30300) PER ASTM A484 OR ASTM A582.

LOCKING ELEMENTS:
CRES CL440C (UNS S44004) PER AMS 5630, AMS 5880 OR QQ-S-763.

SHANK AND SPINDLE:
CRES 17-4PH (UNS S17400) PER AMS 5643 OR
PH15-7MO (UNS S15700) PER AMS 5520 OR AMS 5657.

SPRING:
CRES 17-7PH (UNS S17700) PER AMS 5678 OR
CRES 302 (UNS S30200) CLASS 1 PER ASTM A313.

2. HEAT TREATMENT:

SHANK AND SPINDLE PER MIL-H-6875, CONDITION H-900 FOR CRES 17-4PH, AND CONDITION CH-900 FOR PH15-7MO, ROCKWELL C40 MINIMUM.
LOCKING ELEMENTS AND SPRING PER MIL-H-6875.

3. SURFACE TREATMENT:

CRES PARTS - PASSIVATE PER QQ-P-35.
ALUMINUM ALLOY PARTS - ANODIZE PER MIL-A-8625, TYPE I OR II, CLASS 2 OR CHEMICAL FILM PER MIL-C-5541, CLASS 1A. HANDLES MUST BE BLACK.

4. EXAMPLE OF PART IDENTIFYING NUMBER (PIN):

MS17988 C 4 10

- 10 — GRIP IN TENTHS
- 4 — SHANK DIAMETER IN SIXTEENTHS
- C — MATERIAL: "C" - CORROSION RESISTANT STEEL PIN
- MS17988 — BASIC MS NUMBER

5. ALL REFERENCES TO ALLOY STEEL IN THE MANUFACTURE OF THESE PINS HAVE BEEN ELIMINATED. ALL PART NUMBERS LISTED IN REVISION D WITH "_" INDICATING ALLOY STEEL PINS ARE CANCELLED AND SUPERCEDED IN REVISION E BY THE SAME NUMBER WITH "C" REPLACING THE "_". HOWEVER, AT THE DISCRETION OF THE CUSTOMER, ALLOY STEEL PINS, IN ACCORDANCE WITH THE REQUIREMENTS OF REVISION D TO THIS SPECIFICATION SHEET, MAY BE ORDERED FOR UP TO TWO YEARS AFTER THE DATE OF ISSUANCE OF THIS SPECIFICATION SHEET BY SPECIFYING "-" IN LIEU OF "C" IN THE PART NUMBER.

EXAMPLE OF SUPERCEDED PART NUMBER: MS17988_410 IS CANCELLED AND SUPERCEDED BY MS17988C410.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
3. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA-IS<br>CUSTODIANS: ARMY- AV NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW: ARMY - GL, AIR FORCE-82<br>USER:<br>PROJECT NUMBER: 5315-0483 | MILITARY SPECIFICATION SHEET<br>TITLE<br>PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE | SPECIFICATION SHEET NUMBER<br>MS17988 1 JUN 94<br>REV E<br>SUPERSEDING<br>MS17988D 15 NOV 91<br>AMSC- N/A FSC 5315 |
| DISTRIBUTION STATEMENT<br>A. Approved for public release; distribution is unlimited. | | Page 2 of 6 |

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:11Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

TABLE II. GRIP LENGTHS

| GRIP LENGTH | DASH NUMBER | | | | | |
|---|---|---|---|---|---|---|
| | NOMINAL DIAMETER | | | | | |
| | 3/16 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
| .300 | C303 | C403 | C503 | | | |
| .400 | C304 | C404 | C504 | | | |
| .500 | C305 | C405 | C505 | C605 | C705 | |
| .600 | C306 | C406 | C506 | C606 | C706 | |
| .700 | C307 | C407 | C507 | C607 | C707 | C807 |
| .800 | C308 | C408 | C508 | C608 | C708 | C808 |
| .900 | C309 | C409 | C509 | C609 | C709 | C809 |
| 1.000 | C310 | C410 | C510 | C610 | C710 | C810 |
| 1.100 | C311 | C411 | C511 | C611 | C711 | C811 |
| 1.200 | C312 | C412 | C512 | C612 | C712 | C812 |
| 1.300 | C313 | C413 | C513 | C613 | C713 | C813 |
| 1.400 | C314 | C414 | C514 | C614 | C714 | C814 |
| 1.500 | C315 | C415 | C515 | C615 | C715 | C815 |
| 1.600 | C316 | C416 | C516 | C616 | C716 | C816 |
| 1.700 | C317 | C417 | C517 | C617 | C717 | C817 |
| 1.800 | C318 | C418 | C518 | C618 | C718 | C818 |
| 1.900 | C319 | C419 | C519 | C619 | C719 | C819 |
| 2.000 | C320 | C420 | C520 | C620 | C720 | C820 |
| 2.100 | C321 | C421 | C521 | C621 | C721 | C821 |
| 2.200 | C322 | C422 | C522 | C622 | C722 | C822 |
| 2.300 | C323 | C423 | C523 | C623 | C723 | C823 |
| 2.400 | C324 | C424 | C524 | C624 | C724 | C824 |
| 2.500 | C325 | C425 | C525 | C625 | C725 | C825 |
| 2.600 | C326 | C426 | C526 | C626 | C726 | C826 |
| 2.700 | C327 | C427 | C527 | C627 | C727 | C827 |
| 2.800 | C328 | C428 | C528 | C628 | C728 | C828 |
| 2.900 | C329 | C429 | C529 | C629 | C729 | C829 |
| 3.000 | C330 | C430 | C530 | C630 | C730 | C830 |
| 3.100 | C331 | C431 | C531 | C631 | C731 | C831 |
| 3.200 | C332 | C432 | C532 | C632 | C732 | C832 |
| 3.300 | C333 | C433 | C533 | C633 | C733 | C833 |
| 3.400 | C334 | C434 | C534 | C634 | C734 | C834 |
| 3.500 | C335 | C435 | C535 | C635 | C735 | C835 |
| 3.600 | C336 | C436 | C536 | C636 | C736 | C836 |
| 3.700 | C337 | C437 | C537 | C637 | C737 | C837 |
| 3.800 | C338 | C438 | C538 | C638 | C738 | C838 |
| 3.900 | C339 | C439 | C539 | C639 | C739 | C839 |
| 4.000 | C340 | C440 | C540 | C640 | C740 | C840 |
| 4.100 | C341 | C441 | C541 | C641 | C741 | C841 |
| 4.200 | C342 | C442 | C542 | C642 | C742 | C842 |
| 4.300 | C343 | C443 | C543 | C643 | C743 | C843 |
| 4.400 | C344 | C444 | C544 | C644 | C744 | C844 |
| 4.500 | C345 | C445 | C545 | C645 | C745 | C845 |
| 4.600 | C346 | C446 | C546 | C646 | C746 | C846 |
| 4.700 | C347 | C447 | C547 | C647 | C747 | C847 |
| 4.800 | C348 | C448 | C548 | C648 | C748 | C848 |
| 4.900 | C349 | C449 | C549 | C649 | C749 | C849 |
| 5.000 | C350 | C450 | C550 | C650 | C750 | C850 |
| 5.100 | C351 | C451 | C551 | C651 | C751 | C851 |
| 5.200 | C352 | C452 | C552 | C652 | C752 | C852 |
| 5.300 | C353 | C453 | C553 | C653 | C753 | C853 |
| 5.400 | C354 | C454 | C554 | C654 | C754 | C854 |
| 5.500 | C355 | C455 | C555 | C655 | C755 | C855 |

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- AV NAVY- AS
AIR FORCE- 99 DLA-
REVIEW: ARMY - GL, AIR FORCE-82
USER:
PROJECT NUMBER: 5315-0483

MILITARY SPECIFICATION SHEET

TITLE

TITLE PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE

SPECIFICATION SHEET NUMBER
MS17988 1 JUN 94 REV E

SUPERSEDING
MS17988D 15 NOV 91

AMSC- N/A FSC 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:11Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

TABLE II. GRIP LENGTHS (CON'T)

| GRIP LENGTH | DASH NUMBER | | | | | |
|---|---|---|---|---|---|---|
| | NOMINAL DIAMETER | | | | | |
| | 3/16 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
| 5.600 | C356 | C456 | C556 | C656 | C756 | C856 |
| 5.700 | C357 | C457 | C557 | C657 | C757 | C857 |
| 5.800 | C358 | C458 | C558 | C658 | C758 | C858 |
| 5.900 | C359 | C459 | C559 | C659 | C759 | C859 |
| 6.000 | C360 | C460 | C560 | C660 | C760 | C860 |
| 6.100 | C361 | C461 | C561 | C661 | C761 | C861 |
| 6.200 | C362 | C462 | C562 | C662 | C762 | C862 |
| 6.300 | C363 | C463 | C563 | C663 | C763 | C863 |
| 6.400 | C364 | C464 | C564 | C664 | C764 | C864 |
| 6.500 | C365 | C465 | C565 | C665 | C765 | C865 |
| 6.600 | C366 | C466 | C566 | C666 | C766 | C866 |
| 6.700 | C367 | C467 | C567 | C667 | C767 | C867 |
| 6.800 | C368 | C468 | C568 | C668 | C768 | C868 |
| 6.900 | C369 | C469 | C569 | C669 | C769 | C869 |
| 7.000 | C370 | C470 | C570 | C670 | C770 | C870 |
| 7.100 | C371 | C471 | C571 | C671 | C771 | C871 |
| 7.200 | C372 | C472 | C572 | C672 | C772 | C872 |
| 7.300 | C373 | C473 | C573 | C673 | C773 | C873 |
| 7.400 | C374 | C474 | C574 | C674 | C774 | C874 |
| 7.500 | C375 | C475 | C575 | C675 | C775 | C875 |
| 7.600 | C376 | C476 | C576 | C676 | C776 | C876 |
| 7.700 | C377 | C477 | C577 | C677 | C777 | C877 |
| 7.800 | C378 | C478 | C578 | C678 | C778 | C878 |
| 7.900 | C379 | C479 | C579 | C679 | C779 | C879 |
| 8.000 | C380 | C480 | C580 | C680 | C780 | C880 |
| 8.100 | C381 | C481 | C581 | C681 | C781 | C881 |
| 8.200 | C382 | C482 | C582 | C682 | C782 | C882 |
| 8.300 | C383 | C483 | C583 | C683 | C783 | C883 |
| 8.400 | C384 | C484 | C584 | C684 | C784 | C884 |
| 8.500 | C385 | C485 | C585 | C685 | C785 | C885 |
| 8.600 | C386 | C486 | C586 | C686 | C786 | C886 |
| 8.700 | C387 | C487 | C587 | C687 | C787 | C887 |
| 8.800 | C388 | C488 | C588 | C688 | C788 | C888 |
| 8.900 | C389 | C489 | C589 | C689 | C789 | C889 |
| 9.000 | C390 | C490 | C590 | C690 | C790 | C890 |
| 9.100 | C391 | C491 | C591 | C691 | C791 | C891 |
| 9.200 | C392 | C492 | C592 | C692 | C792 | C892 |
| 9.300 | C393 | C493 | C593 | C693 | C793 | C893 |
| 9.400 | C394 | C494 | C594 | C694 | C794 | C894 |
| 9.500 | C395 | C495 | C595 | C695 | C795 | C895 |
| 9.600 | C396 | C496 | C596 | C696 | C796 | C896 |
| 9.700 | C397 | C497 | C597 | C697 | C797 | C897 |
| 9.800 | C398 | C498 | C598 | C698 | C798 | C898 |
| 9.900 | C399 | C499 | C599 | C699 | C799 | C899 |

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- AV NAVY- AS
AIR FORCE- 99 DLA-
REVIEW: ARMY - GL, AIR FORCE-82
USER:
PROJECT NUMBER: 5315-0483

MILITARY SPECIFICATION SHEET

TITLE PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE

SPECIFICATION SHEET NUMBER
MS17988 1 JUN 94 REV E

SUPERSEDING
MS17988D 15 NOV 91

AMSC- N/A FSC 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:11Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

TABLE II. GRIP LENGTHS (CON'T)

| GRIP LENGTH | DASH NUMBER / NOMINAL DIAMETER 9/16 | 5/8 | 3/4 | 7/8 | 1 |
|---|---|---|---|---|---|
| .700 | C907 | | | | |
| .800 | C908 | | | | |
| .900 | C909 | C1009 | C1209 | | |
| 1.000 | C910 | C1010 | C1210 | C1410 | C1610 |
| 1.100 | C911 | C1011 | C1211 | C1411 | C1611 |
| 1.200 | C912 | C1012 | C1212 | C1412 | C1612 |
| 1.300 | C913 | C1013 | C1213 | C1413 | C1613 |
| 1.400 | C914 | C1014 | C1214 | C1414 | C1614 |
| 1.500 | C915 | C1015 | C1215 | C1415 | C1615 |
| 1.600 | C916 | C1016 | C1216 | C1416 | C1616 |
| 1.700 | C917 | C1017 | C1217 | C1417 | C1617 |
| 1.800 | C918 | C1018 | C1218 | C1418 | C1618 |
| 1.900 | C919 | C1019 | C1219 | C1419 | C1619 |
| 2.000 | C920 | C1020 | C1220 | C1420 | C1620 |
| 2.100 | C921 | C1021 | C1221 | C1421 | C1621 |
| 2.200 | C922 | C1022 | C1222 | C1422 | C1622 |
| 2.300 | C923 | C1023 | C1223 | C1423 | C1623 |
| 2.400 | C924 | C1024 | C1224 | C1424 | C1624 |
| 2.500 | C925 | C1025 | C1225 | C1425 | C1625 |
| 2.600 | C926 | C1026 | C1226 | C1426 | C1626 |
| 2.700 | C927 | C1027 | C1227 | C1427 | C1627 |
| 2.800 | C928 | C1028 | C1228 | C1428 | C1628 |
| 2.900 | C929 | C1029 | C1229 | C1429 | C1629 |
| 3.000 | C930 | C1030 | C1230 | C1430 | C1630 |
| 3.100 | C931 | C1031 | C1231 | C1431 | C1631 |
| 3.200 | C932 | C1032 | C1232 | C1432 | C1632 |
| 3.300 | C933 | C1033 | C1233 | C1433 | C1633 |
| 3.400 | C934 | C1034 | C1234 | C1434 | C1634 |
| 3.500 | C935 | C1035 | C1235 | C1435 | C1635 |
| 3.600 | C936 | C1036 | C1236 | C1436 | C1636 |
| 3.700 | C937 | C1037 | C1237 | C1437 | C1637 |
| 3.800 | C938 | C1038 | C1238 | C1438 | C1638 |
| 3.900 | C939 | C1039 | C1239 | C1439 | C1639 |
| 4.000 | C940 | C1040 | C1240 | C1440 | C1640 |
| 4.100 | C941 | C1041 | C1241 | C1441 | C1641 |
| 4.200 | C942 | C1042 | C1242 | C1442 | C1642 |
| 4.300 | C943 | C1043 | C1243 | C1443 | C1643 |
| 4.400 | C944 | C1044 | C1244 | C1444 | C1644 |
| 4.500 | C945 | C1045 | C1245 | C1445 | C1645 |
| 4.600 | C946 | C1046 | C1246 | C1446 | C1646 |
| 4.700 | C947 | C1047 | C1247 | C1447 | C1647 |
| 4.800 | C948 | C1048 | C1248 | C1448 | C1648 |
| 4.900 | C949 | C1049 | C1249 | C1449 | C1649 |
| 5.000 | C950 | C1050 | C1250 | C1450 | C1650 |
| 5.100 | C951 | C1051 | C1251 | C1451 | C1651 |
| 5.200 | C952 | C1052 | C1252 | C1452 | C1652 |
| 5.300 | C953 | C1053 | C1253 | C1453 | C1653 |
| 5.400 | C954 | C1054 | C1254 | C1454 | C1654 |
| 5.500 | C955 | C1055 | C1255 | C1455 | C1655 |
| 5.600 | C956 | C1056 | C1256 | C1456 | C1656 |
| 5.700 | C957 | C1057 | C1257 | C1457 | C1657 |
| 5.800 | C958 | C1058 | C1258 | C1458 | C1658 |
| 5.900 | C959 | C1059 | C1259 | C1459 | C1659 |
| 6.000 | C960 | C1060 | C1260 | C1460 | C1660 |

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA-IS<br>CUSTODIANS: ARMY- AV NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW: ARMY - GL, AIR FORCE-82<br>USER:<br>PROJECT NUMBER: 5315-0483 | MILITARY SPECIFICATION SHEET<br>TITLE<br>TITLE PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE | SPECIFICATION SHEET NUMBER<br>MS17988 1 JUN 94 REV E<br>SUPERSEDING<br>MS17988D 15 NOV 91<br>AMSC- N/A FSC 5315 |
| DISTRIBUTION STATEMENT<br>A. Approved for public release; distribution is unlimited. | | Page 5 of 6 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:11Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-P-23460

Form Approved
OMB No. 0704-0188

TABLE II. GRIP LENGTHS (CON'T)

| DASH NUMBER | | | | | |
|---|---|---|---|---|---|
| | NOMINAL DIAMETER | | | | |
| GRIP LENGTH | 7/16 | 5/8 | 3/4 | 7/8 | 1 |
| 6.100 | C961 | C1061 | C1261 | C1461 | C1661 |
| 6.200 | C962 | C1062 | C1262 | C1462 | C1662 |
| 6.300 | C963 | C1063 | C1263 | C1463 | C1663 |
| 6.400 | C964 | C1064 | C1264 | C1464 | C1664 |
| 6.500 | C965 | C1065 | C1265 | C1465 | C1665 |
| 6.600 | C966 | C1066 | C1266 | C1466 | C1666 |
| 6.700 | C967 | C1067 | C1267 | C1467 | C1667 |
| 6.800 | C968 | C1068 | C1268 | C1468 | C1668 |
| 6.900 | C969 | C1069 | C1269 | C1469 | C1669 |
| 7.000 | C970 | C1070 | C1270 | C1470 | C1670 |
| 7.100 | C971 | C1071 | C1271 | C1471 | C1671 |
| 7.200 | C972 | C1072 | C1272 | C1472 | C1672 |
| 7.300 | C973 | C1073 | C1273 | C1473 | C1673 |
| 7.400 | C974 | C1074 | C1274 | C1474 | C1674 |
| 7.500 | C975 | C1075 | C1275 | C1475 | C1675 |
| 7.600 | C976 | C1076 | C1276 | C1476 | C1676 |
| 7.700 | C977 | C1077 | C1277 | C1477 | C1677 |
| 7.800 | C978 | C1078 | C1278 | C1478 | C1678 |
| 7.900 | C979 | C1079 | C1279 | C1479 | C1679 |
| 8.000 | C980 | C1080 | C1280 | C1480 | C1680 |
| 8.100 | C981 | C1081 | C1281 | C1481 | C1681 |
| 8.200 | C982 | C1082 | C1282 | C1482 | C1682 |
| 8.300 | C983 | C1083 | C1283 | C1483 | C1683 |
| 8.400 | C984 | C1084 | C1284 | C1484 | C1684 |
| 8.500 | C985 | C1085 | C1285 | C1485 | C1685 |
| 8.600 | C986 | C1086 | C1286 | C1486 | C1686 |
| 8.700 | C987 | C1087 | C1287 | C1487 | C1687 |
| 8.800 | C988 | C1088 | C1288 | C1488 | C1688 |
| 8.900 | C989 | C1089 | C1289 | C1489 | C1689 |
| 9.000 | C990 | C1090 | C1290 | C1490 | C1690 |
| 9.100 | C991 | C1091 | C1291 | C1491 | C1691 |
| 9.200 | C992 | C1092 | C1292 | C1492 | C1692 |
| 9.300 | C993 | C1093 | C1293 | C1493 | C1693 |
| 9.400 | C994 | C1094 | C1294 | C1494 | C1694 |
| 9.500 | C995 | C1095 | C1295 | C1495 | C1695 |
| 9.600 | C996 | C1096 | C1296 | C1496 | C1696 |
| 9.700 | C997 | C1097 | C1297 | C1497 | C1697 |
| 9.800 | C998 | C1098 | C1298 | C1498 | C1698 |
| 9.900 | C999 | C1099 | C1299 | C1499 | C1699 |

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA-IS<br>CUSTODIANS: ARMY- AV NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW: ARMY - GL, AIR FORCE-82<br>USER:<br>PROJECT NUMBER: 5315-0483 | MILITARY SPECIFICATION SHEET<br>TITLE<br>TITLE PIN, QUICK RELEASE, SELF-RETAINING, POSITIVE LOCKING, DOUBLE ACTING, "T" HANDLE | SPECIFICATION SHEET NUMBER<br>MS17988 1 JUN 94 REV E<br>SUPERSEDING<br>MS17988D 15 NOV 91<br>AMSC- N/A FSC 5315 |
| DISTRIBUTION STATEMENT<br>A. Approved for public release; distribution is unlimited. | | Page 6 of 6 |

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:11Z
Check the source to verify that this is the current version before use.