INCH-POUND

A-A-60030A
23 December 2022
SUPERSEDING
A-A-60030
24 May 2022

COMMERCIAL ITEM DESCRIPTION

WASHERS, CADMIUM AND HEXAVALENT-CHROMIUM FREE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1 SCOPE. This commercial item description (CID) covers washers containing no cadmium nor hexavalent-chromium in their finishes.

2 CLASSIFICATION

2.1 Types.

Type I	-	Washer, Flat, Reduced Outside Diameter (use AIA/NAS620)
Type II	-	Washer, Flat (use AIA/NAS1149)
Type III	-	Washer, Flat (use AIA/NASM970)
Type IV	-	Washer, Flat, Metal, Round, General Purpose (use AIA/NASM15795)
Type V	-	Washer, Countersunk and Plain, High Strength (use AIA/NASM20002)
Type VI	-	Washer, Lock, Flat, Internal Tooth (use AIA/NASM35333)
Type VII	-	Washer, Lock-Spring, Helical, Regular (Medium) Series (use AIA/NASM35338)
Type VIII	-	Washer, Rod End, Locking (use AIA/NAS513)

3 SALIENT CHARACTERISTICS.

3.1 Materials. Washers shall be manufactured as specified in the Aerospace Industry Association (AIA) documents listed above, by type, except the plating/finishes shall be cadmium free and hexavalent-chromium free finishes as specified herein. The use of recovered materials made in compliance with regulatory requirements is acceptable provided all requirements of this CID are met.

Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2 Dimensions. Dimensions for all designated type of washers apply after plating/finishing.

3.3 Cadmium and hexavalent-chromium free finish/plating codes.

QX - Steel – Zinc-Nickel, MIL-PRF-32647, Type K16
B1 - Steel – Black oxide, MIL-DTL-13924, Class 1
B - CRES – Black oxide, MIL-DTL-13924, Class 4
P5 - CRES – shall be cleaned, descaled and passivated in accordance with SAE AMS2700, Method 1, Type 6, 7 or 8 or Method 2; or ASTM A967/A967M, passivation treatments containing dichromate are prohibited. Post-cleaning treatment is prohibited.
U - CRES – High purity aluminum MIL-DTL-83488, Class 2, Type I, with conversion coating per MIL-DTL-5541, Type II, Class 3.
W - CRES - Aluminum Coating NAS4006, Class NC
K - Aluminum – chemically treated in accordance with MIL-DTL-5541, Type II, Class 3 or anodize MIL-PRF-8625, Type IC, II or IIB, Class 1. Sealers (clear or any color) shall not contain hexavalent chromium.
H - No finish/plating

3.4 Interchangeability. When AIA/NASM specifications list interchangeability parts, do not interchange parts containing cadmium or hexavalent-chromium with the cadmium and hexavalent-chromium free parts listed herein without design authority approval.

4 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 14057; as applicable.

5 PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this CID and conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to perform or witness any of the inspections it deems necessary to ensure supplies and services conform to prescribed requirements.

6 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7 NOTES

The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.


7.1 Tables. The following tables indicate new finish/plating PIN's which are cadmium and hexavalent-chromium free for designated washers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE I – Type I (-1) washer, flat, reduced outside diameter.

A-A-60030 Part Number	Reference Part Number (from NAS620)
AA60030-1-0QX	NAS620-0
AA60030-1-2QX	NAS620-2
AA60030-1-3LQX	NAS620-3L
AA60030-1-3QX	NAS620-3
AA60030-1-4LQX	NAS620-4L
AA60030-1-4QX	NAS620-4
AA60030-1-5LQX	NAS620-5L
AA60030-1-5QX	NAS620-5
AA60030-1-6LQX	NAS620-6L
AA60030-1-6QX	NAS620-6
AA60030-1-8LQX	NAS620-8L
AA60030-1-8QX	NAS620-8
AA60030-1-10LQX	NAS620-10L
AA60030-1-10QX	NAS620-10
AA60030-1-416LQX	NAS620-416L
AA60030-1-416QX	NAS620-416

PIN construction:

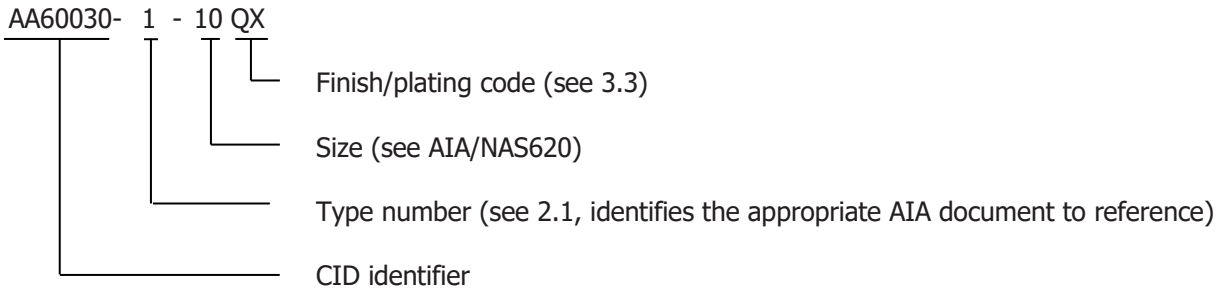

Example of part number:

AA60030-1-10QX = an AIA/NAS620 – NO. 10 steel washer, Zinc-Nickel Type K16 plating, 0.063 inch thick, I.D. 0.354, and O.D. 0.195.

TABLE II – Type II (-2) washer, flat.

A-A-60030 Part Number	Reference Part Number (from AIA/NAS1149)
AA60030-2-(MC)N016(OC)(FC)	NAS1149(MC)N016(OC)(FC)
AA60030-2-(MC)N032(OC)(FC)	NAS1149(MC)N032(OC)(FC)
AA60030-2-(MC)N216(OC)(FC)	NAS1149(MC)N216(OC)(FC)
AA60030-2-(MC)N232(OC)(FC)	NAS1149(MC)N232(OC)(FC)
AA60030-2-(MC)N316(OC)(FC)	NAS1149(MC)N316(OC)(FC)
AA60030-2-(MC)N332(OC)(FC)	NAS1149(MC)N332(OC)(FC)
AA60030-2-(MC)N416(OC)(FC)	NAS1149(MC)N416(OC)(FC)
AA60030-2-(MC)N432(OC)(FC)	NAS1149(MC)N432(OC)(FC)
AA60030-2-(MC)N516(OC)(FC)	NAS1149(MC)N516(OC)(FC)
AA60030-2-(MC)N532(OC)(FC)	NAS1149(MC)N532(OC)(FC)

A-A-60030 Part Number	Reference Part Number (from AIA/NAS1149)
AA60030-2-(MC)0990(OC)(FC)	NAS1149(MC)0990(OC)(FC)
AA60030-2-(MC)1016(OC)(FC)	NAS1149(MC)1016(OC)(FC)
AA60030-2-(MC)1032(OC)(FC)	NAS1149(MC)1032(OC)(FC)
AA60030-2-(MC)1063(OC)(FC)	NAS1149(MC)1063(OC)(FC)
AA60030-2-(MC)1082(OC)(FC)	NAS1149(MC)1082(OC)(FC)
AA60030-2-(MC)1090(OC)(FC)	NAS1149(MC)1090(OC)(FC)
AA60030-2-(MC)1165(OC)(FC)	NAS1149(MC)1165(OC)(FC)
AA60030-2-(MC)1216(OC)(FC)	NAS1149(MC)1216(OC)(FC)
AA60030-2-(MC)1232(OC)(FC)	NAS1149(MC)1232(OC)(FC)
AA60030-2-(MC)1263(OC)(FC)	NAS1149(MC)1263(OC)(FC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE II – Type II (-2) washer, flat – Continued.


AA60030-2-(MC)N542(OC)(FC)	NAS1149(MC)N542(OC)(FC)
AA60030-2-(MC)N616(OC)(FC)	NAS1149(MC)N616(OC)(FC)
AA60030-2-(MC)N632(OC)(FC)	NAS1149(MC)N632(OC)(FC)
AA60030-2-(MC)N816(OC)(FC)	NAS1149(MC)N816(OC)(FC)
AA60030-2-(MC)N832(OC)(FC)	NAS1149(MC)N832(OC)(FC)
AA60030-2-(MC)N863(OC)(FC)	NAS1149(MC)N863(OC)(FC)
AA60030-2-(MC)N949(OC)(FC)	NAS1149(MC)N949(OC)(FC)
AA60030-2-(MC)2N32(OC)(FC)	NAS1149(MC)2N32(OC)(FC)
AA60030-2-(MC)3A16(OC)(FC)	NAS1149(MC)3A16(OC)(FC)
AA60030-2-(MC)3A32(OC)(FC)	NAS1149(MC)3A32(OC)(FC)
AA60030-2-(MC)3A42(OC)(FC)	NAS1149(MC)3A42(OC)(FC)
AA60030-2-(MC)3A49(OC)(FC)	NAS1149(MC)3A49(OC)(FC)
AA60030-2-(MC)3A63(OC)(FC)	NAS1149(MC)3A63(OC)(FC)
AA60030-2-(MC)0316(OC)(FC)	NAS1149(MC)0316(OC)(FC)
AA60030-2-(MC)0332(OC)(FC)	NAS1149(MC)0332(OC)(FC)
AA60030-2-(MC)0363(OC)(FC)	NAS1149(MC)0363(OC)(FC)
AA60030-2-(MC)0382(OC)(FC)	NAS1149(MC)0382(OC)(FC)
AA60030-2-(MC)0416(OC)(FC)	NAS1149(MC)0416(OC)(FC)
AA60030-2-(MC)0432(OC)(FC)	NAS1149(MC)0432(OC)(FC)
AA60030-2-(MC)0442(OC)(FC)	NAS1149(MC)0442(OC)(FC)
AA60030-2-(MC)0449(OC)(FC)	NAS1149(MC)0449(OC)(FC)
AA60030-2-(MC)0463(OC)(FC)	NAS1149(MC)0463(OC)(FC)
AA60030-2-(MC)0482(OC)(FC)	NAS1149(MC)0482(OC)(FC)
AA60030-2-(MC)0516(OC)(FC)	NAS1149(MC)0516(OC)(FC)
AA60030-2-(MC)0532(OC)(FC)	NAS1149(MC)0532(OC)(FC)
AA60030-2-(MC)0563(OC)(FC)	NAS1149(MC)0563(OC)(FC)
AA60030-2-(MC)0582(OC)(FC)	NAS1149(MC)0582(OC)(FC)
AA60030-2-(MC)0616(OC)(FC)	NAS1149(MC)0616(OC)(FC)
AA60030-2-(MC)0632(OC)(FC)	NAS1149(MC)0632(OC)(FC)
AA60030-2-(MC)0663(OC)(FC)	NAS1149(MC)0663(OC)(FC)
AA60030-2-(MC)0682(OC)(FC)	NAS1149(MC)0682(OC)(FC)
AA60030-2-(MC)0690(OC)(FC)	NAS1149(MC)0690(OC)(FC)
AA60030-2-(MC)0716(OC)(FC)	NAS1149(MC)0716(OC)(FC)
AA60030-2-(MC)0732(OC)(FC)	NAS1149(MC)0732(OC)(FC)
AA60030-2-(MC)0763(OC)(FC)	NAS1149(MC)0763(OC)(FC)
AA60030-2-(MC)0782(OC)(FC)	NAS1149(MC)0782(OC)(FC)
AA60030-2-(MC)0790(OC)(FC)	NAS1149(MC)0790(OC)(FC)
AA60030-2-(MC)0816(OC)(FC)	NAS1149(MC)0816(OC)(FC)
AA60030-2-(MC)0832(OC)(FC)	NAS1149(MC)0832(OC)(FC)
AA60030-2-(MC)0863(OC)(FC)	NAS1149(MC)0863(OC)(FC)
AA60030-2-(MC)0882(OC)(FC)	NAS1149(MC)0882(OC)(FC)
AA60030-2-(MC)0890(OC)(FC)	NAS1149(MC)0890(OC)(FC)
AA60030-2-(MC)0916(OC)(FC)	NAS1149(MC)0916(OC)(FC)
AA60030-2-(MC)0932(OC)(FC)	NAS1149(MC)0932(OC)(FC)
AA60030-2-(MC)0963(OC)(FC)	NAS1149(MC)0963(OC)(FC)
AA60030-2-(MC)0982(OC)(FC)	NAS1149(MC)0982(OC)(FC)
AA60030-2-(MC)1282(OC)(FC)	NAS1149(MC)1282(OC)(FC)
AA60030-2-(MC)1290(OC)(FC)	NAS1149(MC)1290(OC)(FC)
AA60030-2-(MC)1416(OC)(FC)	NAS1149(MC)1416(OC)(FC)
AA60030-2-(MC)1432(OC)(FC)	NAS1149(MC)1432(OC)(FC)
AA60030-2-(MC)1463(OC)(FC)	NAS1149(MC)1463(OC)(FC)
AA60030-2-(MC)1482(OC)(FC)	NAS1149(MC)1482(OC)(FC)
AA60030-2-(MC)1490(OC)(FC)	NAS1149(MC)1490(OC)(FC)
AA60030-2-(MC)1616(OC)(FC)	NAS1149(MC)1616(OC)(FC)
AA60030-2-(MC)1632(OC)(FC)	NAS1149(MC)1632(OC)(FC)
AA60030-2-(MC)1663(OC)(FC)	NAS1149(MC)1663(OC)(FC)
AA60030-2-(MC)1682(OC)(FC)	NAS1149(MC)1682(OC)(FC)
AA60030-2-(MC)1690(OC)(FC)	NAS1149(MC)1690(OC)(FC)
AA60030-2-(MC)1716(OC)(FC)	NAS1149(MC)1716(OC)(FC)
AA60030-2-(MC)1732(OC)(FC)	NAS1149(MC)1732(OC)(FC)
AA60030-2-(MC)1763(OC)(FC)	NAS1149(MC)1763(OC)(FC)
AA60030-2-(MC)1782(OC)(FC)	NAS1149(MC)1782(OC)(FC)
AA60030-2-(MC)1790(OC)(FC)	NAS1149(MC)1790(OC)(FC)
AA60030-2-(MC)1816(OC)(FC)	NAS1149(MC)1816(OC)(FC)
AA60030-2-(MC)1832(OC)(FC)	NAS1149(MC)1832(OC)(FC)
AA60030-2-(MC)1863(OC)(FC)	NAS1149(MC)1863(OC)(FC)
AA60030-2-(MC)1882(OC)(FC)	NAS1149(MC)1882(OC)(FC)
AA60030-2-(MC)1890(OC)(FC)	NAS1149(MC)1890(OC)(FC)
AA60030-2-(MC)2016(OC)(FC)	NAS1149(MC)2016(OC)(FC)
AA60030-2-(MC)2032(OC)(FC)	NAS1149(MC)2032(OC)(FC)
AA60030-2-(MC)2063(OC)(FC)	NAS1149(MC)2063(OC)(FC)
AA60030-2-(MC)2082(OC)(FC)	NAS1149(MC)2082(OC)(FC)
AA60030-2-(MC)2090(OC)(FC)	NAS1149(MC)2090(OC)(FC)
AA60030-2-(MC)2116(OC)(FC)	NAS1149(MC)2116(OC)(FC)
AA60030-2-(MC)2132(OC)(FC)	NAS1149(MC)2132(OC)(FC)
AA60030-2-(MC)2163(OC)(FC)	NAS1149(MC)2163(OC)(FC)
AA60030-2-(MC)2182(OC)(FC)	NAS1149(MC)2182(OC)(FC)
AA60030-2-(MC)2190(OC)(FC)	NAS1149(MC)2190(OC)(FC)
AA60030-2-(MC)2216(OC)(FC)	NAS1149(MC)2216(OC)(FC)
AA60030-2-(MC)2232(OC)(FC)	NAS1149(MC)2232(OC)(FC)
AA60030-2-(MC)2263(OC)(FC)	NAS1149(MC)2263(OC)(FC)
AA60030-2-(MC)2282(OC)(FC)	NAS1149(MC)2282(OC)(FC)
AA60030-2-(MC)2290(OC)(FC)	NAS1149(MC)2290(OC)(FC)
AA60030-2-(MC)2416(OC)(FC)	NAS1149(MC)2416(OC)(FC)
AA60030-2-(MC)2432(OC)(FC)	NAS1149(MC)2432(OC)(FC)
AA60030-2-(MC)2463(OC)(FC)	NAS1149(MC)2463(OC)(FC)
AA60030-2-(MC)2482(OC)(FC)	NAS1149(MC)2482(OC)(FC)
AA60030-2-(MC)2490(OC)(FC)	NAS1149(MC)2490(OC)(FC)
AA60030-2-(MC)2616(OC)(FC)	NAS1149(MC)2616(OC)(FC)
AA60030-2-(MC)2632(OC)(FC)	NAS1149(MC)2632(OC)(FC)
AA60030-2-(MC)2663(OC)(FC)	NAS1149(MC)2663(OC)(FC)
AA60030-2-(MC)2682(OC)(FC)	NAS1149(MC)2682(OC)(FC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE II – Type II (-2) washer, flat – Continued.

AA60030-2-(MC)2690(OC)(FC)	NAS1149(MC)2690(OC)(FC)	AA60030-2-(MC)7125(OC)(FC)	NAS1149(MC)7125(OC)(FC)
AA60030-2-(MC)3016(OC)(FC)	NAS1149(MC)3016(OC)(FC)	AA60030-2-(MC)8125(OC)(FC)	NAS1149(MC)8125(OC)(FC)
AA60030-2-(MC)3032(OC)(FC)	NAS1149(MC)3032(OC)(FC)	AA60030-2-(MC)9125(OC)(FC)	NAS1149(MC)9125(OC)(FC)
AA60030-2-(MC)3063(OC)(FC)	NAS1149(MC)3063(OC)(FC)	AA60030-2-(MC)10125(OC)(FC)	NAS1149(MC)10125(OC)(FC)
AA60030-2-(MC)3082(OC)(FC)	NAS1149(MC)3082(OC)(FC)	AA60030-2-(MC)12125(OC)(FC)	NAS1149(MC)12125(OC)(FC)
AA60030-2-(MC)3090(OC)(FC)	NAS1149(MC)3090(OC)(FC)	AA60030-2-(MC)14125(OC)(FC)	NAS1149(MC)14125(OC)(FC)
AA60030-2-(MC)3616(OC)(FC)	NAS1149(MC)3616(OC)(FC)	AA60030-2-(MC)16125(OC)(FC)	NAS1149(MC)16125(OC)(FC)
AA60030-2-(MC)3632(OC)(FC)	NAS1149(MC)3632(OC)(FC)	AA60030-2-(MC)17125(OC)(FC)	NAS1149(MC)17125(OC)(FC)
AA60030-2-(MC)3663(OC)(FC)	NAS1149(MC)3663(OC)(FC)	AA60030-2-(MC)18125(OC)(FC)	NAS1149(MC)18125(OC)(FC)
AA60030-2-(MC)3682(OC)(FC)	NAS1149(MC)3682(OC)(FC)	AA60030-2-(MC)20125(OC)(FC)	NAS1149(MC)20125(OC)(FC)
AA60030-2-(MC)3690(OC)(FC)	NAS1149(MC)3690(OC)(FC)	AA60030-2-(MC)21125(OC)(FC)	NAS1149(MC)21125(OC)(FC)
AA60030-2-(MC)4016(OC)(FC)	NAS1149(MC)4016(OC)(FC)	AA60030-2-(MC)22125(OC)(FC)	NAS1149(MC)22125(OC)(FC)
AA60030-2-(MC)4032(OC)(FC)	NAS1149(MC)4032(OC)(FC)	AA60030-2-(MC)24125(OC)(FC)	NAS1149(MC)24125(OC)(FC)
AA60030-2-(MC)4063(OC)(FC)	NAS1149(MC)4063(OC)(FC)	AA60030-2-(MC)26125(OC)(FC)	NAS1149(MC)26125(OC)(FC)
AA60030-2-(MC)4082(OC)(FC)	NAS1149(MC)4082(OC)(FC)	AA60030-2-(MC)30125(OC)(FC)	NAS1149(MC)30125(OC)(FC)
AA60030-2-(MC)4090(OC)(FC)	NAS1149(MC)4090(OC)(FC)	AA60030-2-(MC)36125(OC)(FC)	NAS1149(MC)36125(OC)(FC)
AA60030-2-(MC)6125(OC)(FC)	NAS1149(MC)6125(OC)(FC)	AA60030-2-(MC)40125(OC)(FC)	NAS1149(MC)40125(OC)(FC)

PIN construction:

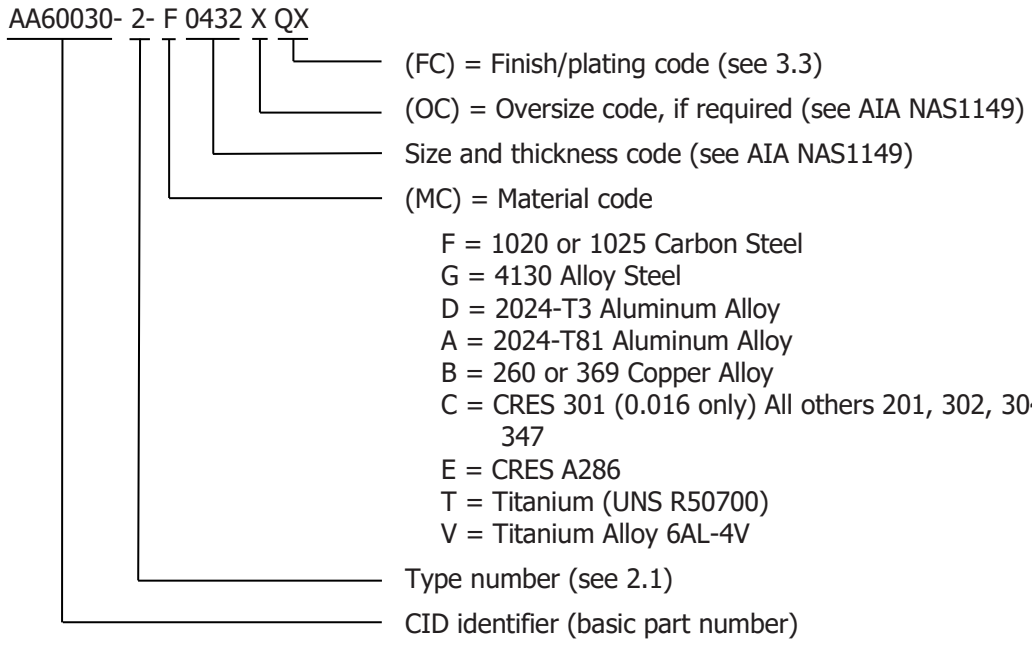

Examples of cadmium or hexavalent-chromium free part numbers:

AA60030-2-F1290QX = an AIA/NAS1149, carbon steel washer, 0.750 nominal diameter, 0.090 thick, Zinc-Nickel Type K16 finish.

AA60030-2-F1290XQX = an AIA/NAS1149, carbon steel washer, 0.750 nominal diameter, 0.090 thick, 0.0156 oversize, Zinc-Nickel Type K16 finish.

AA60030-2-G1290QX = an AIA/NAS1149, alloy steel washer, 0.750 nominal diameter, 0.090 thick, Zinc-Nickel Type K16 finish.

AA60030-2-E1290P5 = an AIA/NAS1149, CRES A286 washer, 0.750 nominal diameter, 0.090 thick, passivated.

AA60030-2-D0432J = an AIA/NAS1149, 2024-T3 Aluminum washer, 0.250 nominal diameter, 0.032 thick, chemically treated or Alodine.


AA60030-2-V0432XW = an AIA/NAS1149, 6AL-4V titanium washer, 0.250 nominal diameter, 0.032 thick, 0.0156 oversize, aluminum coated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE III – Type III (-3) washer, flat.

A-A-60030 Part Number	Reference Part Number (from AIA/NASM970)
AA60030-3-3QX	AN970-3
AA60030-3-4QX	AN970-4
AA60030-3-5QX	AN970-5
AA60030-3-6QX	AN970-6
AA60030-3-7QX	AN970-7
AA60030-3-8QX	AN970-8
AA60030-3-9QX	AN970-9
AA60030-3-10QX	AN970-10

PIN construction:

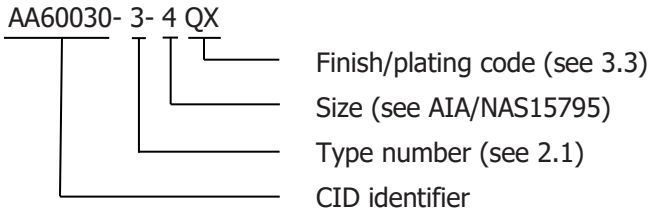

Example part number:

AA60030-3-4QX = an AIA/NASM970 - 1/4 bolt size, 0.265 ØA, 1.125 ØD and 0.063 thick steel with a Zinc-Nickel Type K16 finish.

TABLE IV – Type IV (-4) washer, flat, metal, round, general purpose.[1/]

A-A-60030 Part Number	Reference Part number (see AIA/NASM15795)	A-A-60030 Part Number	Reference Part number (see AIA/NASM15795)
CRES 300 Series Passivate	CRES 300 Series Passivate	Aluminum Alloy Anodize	AL Alloy Anodize
AA60030-4-801P5	MS15795-801	AA60030-4-744J	MS15795-744
AA60030-4-844P5	MS15795-844	AA60030-4-701J	MS15795-701
AA60030-4-802P5	MS15795-802	AA60030-4-702J	MS15795-702
AA60030-4-803P5	MS15795-803	AA60030-4-756J	MS15795-756
AA60030-4-804P5	MS15795-804	AA60030-4-703J	MS15795-703
AA60030-4-805P5	MS15795-805	AA60030-4-704J	MS15795-704
AA60030-4-806P5	MS15795-806	AA60030-4-705J	MS15795-705
AA60030-4-845P5	MS15795-845	AA60030-4-706J	MS15795-706
AA60030-4-856P5	MS15795-856	AA60030-4-745J	MS15795-745
AA60030-4-807P5	MS15795-807	AA60030-4-707J	MS15795-707
AA60030-4-841P5	MS15795-841	AA60030-4-741J	MS15795-741
AA60030-4-846P5	MS15795-846	AA60030-4-746J	MS15795-746
AA60030-4-847P5	MS15795-847	AA60030-4-747J	MS15795-747
AA60030-4-848P5	MS15795-848	AA60030-4-748J	MS15795-748
AA60030-4-849P5	MS15795-849	AA60030-4-749J	MS15795-749
AA60030-4-857P5	MS15795-857	AA60030-4-708J	MS15795-708
AA60030-4-850P5	MS15795-850	AA60030-4-742J	MS15795-742
AA60030-4-808P5	MS15795-808	AA60030-4-709J	MS15795-709
AA60030-4-842P5	MS15795-842	AA60030-4-750J	MS15795-750
AA60030-4-809P5	MS15795-809	AA60030-4-751J	MS15795-751
AA60030-4-851P5	MS15795-851	AA60030-4-752J	MS15795-752
AA60030-4-852P5	MS15795-852	AA60030-4-710J	MS15795-710


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE IV – Type IV (-4) washer, flat, metal, round, general purpose - Continued.

AA60030-4-853P5	MS15795-853	AA60030-4-711J	MS15795-711
AA60030-4-858P5	MS15795-858	AA60030-4-753J	MS15795-753
AA60030-4-810P5	MS15795-810	AA60030-4-712J	MS15795-712
AA60030-4-854P5	MS15795-854	AA60030-4-713J	MS15795-713
AA60030-4-811P5	MS15795-811	AA60030-4-754J	MS15795-754
AA60030-4-812P5	MS15795-812	AA60030-4-714J	MS15795-714
AA60030-4-813P5	MS15795-813	AA60030-4-715J	MS15795-715
AA60030-4-814P5	MS15795-814	AA60030-4-716J	MS15795-716
AA60030-4-815P5	MS15795-815	AA60030-4-717J	MS15795-717
AA60030-4-816P5	MS15795-816	AA60030-4-718J	MS15795-718
AA60030-4-817P5	MS15795-817	AA60030-4-719J	MS15795-719
AA60030-4-818P5	MS15795-818	AA60030-4-743J	MS15795-743
AA60030-4-855P5	MS15795-855	AA60030-4-755J	MS15795-755
AA60030-4-819P5	MS15795-819	AA60030-4-740J	MS15795-740
AA60030-4-843P5	MS15795-843	AA60030-4-720J	MS15795-720
AA60030-4-840P5	MS15795-840	AA60030-4-721J	MS15795-721
AA60030-4-820P5	MS15795-820	AA60030-4-722J	MS15795-722
AA60030-4-821P5	MS15795-821	AA60030-4-723J	MS15795-723
AA60030-4-822P5	MS15795-822	AA60030-4-724J	MS15795-724
AA60030-4-823P5	MS15795-823	AA60030-4-725J	MS15795-725
AA60030-4-824P5	MS15795-824	AA60030-4-726J	MS15795-726
AA60030-4-825P5	MS15795-825	AA60030-4-727J	MS15795-727
AA60030-4-826P5	MS15795-826	AA60030-4-728J	MS15795-728
AA60030-4-827P5	MS15795-827	AA60030-4-729J	MS15795-729
AA60030-4-828P5	MS15795-828	AA60030-4-730J	MS15795-730
AA60030-4-829P5	MS15795-829	AA60030-4-731J	MS15795-731
AA60030-4-830P5	MS15795-830	AA60030-4-732J	MS15795-732
AA60030-4-831P5	MS15795-831	AA60030-4-733J	MS15795-733
AA60030-4-832P5	MS15795-832	AA60030-4-734J	MS15795-734
AA60030-4-833P5	MS15795-833	AA60030-4-735J	MS15795-735
AA60030-4-834P5	MS15795-834	AA60030-4-736J	MS15795-736
AA60030-4-835P5	MS15795-835	AA60030-4-737J	MS15795-737
AA60030-4-836P5	MS15795-836	AA60030-4-738J	MS15795-738
AA60030-4-837P5	MS15795-837	AA60030-4-739J	MS15795-739
AA60030-4-838P5	MS15795-838	---	---
AA60030-4-839P5	MS15795-839	---	---

1/ The purpose of Table is to provide cadmium and hexavalent-chromium free for CRES and Aluminum washers, for all other finishes/plating options see AIA/NASM15795.

PIN construction:

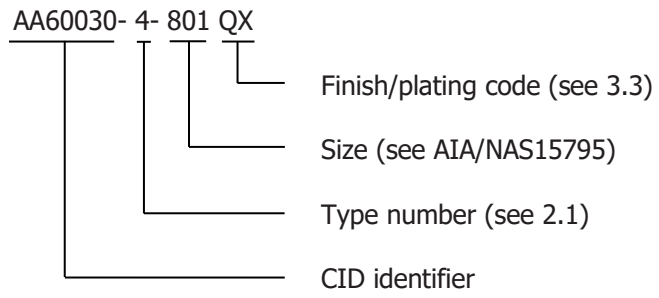

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.


Example of part numbers:

AA60030-4-837P5 = an AIA/NASM15795 – CRES, 2.625 ØA, 5.000 ØD and 0.238 thick, passivated flat round washer.
AA60030-4-739J = an AIA/NASM15795 – Aluminum Alloy, 3.125 ØA, 5.500 ØD and 0.284 thick, chemically treated (hexavalent-chromium free) flat round washer.

TABLE V – Type V (-5) washer, countersunk and plain, high strength.

A-A-60030 Part Number	Reference Part Number (see AIA/NASM20002)	A-A-60030 Part Number	Reference Part Number (see AIA/NASM20002)
COUNTERSUNK	COUNTERSUNK	PLAIN	PLAIN
AA60030-5-C4QX	MS20002C4	AA60030-5-4QX	MS20002-4
AA60030-5-C5QX	MS20002C5	AA60030-5-5QX	MS20002-5
AA60030-5-C6QX	MS20002C6	AA60030-5-6QX	MS20002-6
AA60030-5-C7QX	MS20002C7	AA60030-5-7QX	MS20002-7
AA60030-5-C8QX	MS20002C8	AA60030-5-8QX	MS20002-8
AA60030-5-C9QX	MS20002C9	AA60030-5-9QX	MS20002-9
AA60030-5-C10QX	MS20002C10	AA60030-5-10QX	MS20002-10
AA60030-5-C12QX	MS20002C12	AA60030-5-12QX	MS20002-12
AA60030-5-C14QX	MS20002C14	AA60030-5-14QX	MS20002-14
AA60030-5-C16QX	MS20002C16	AA60030-5-16QX	MS20002-16
AA60030-5-C18QX	MS20002C18	AA60030-5-18QX	MS20002-18
AA60030-5-C20QX	MS20002C20	AA60030-5-20QX	MS20002-20
AA60030-5-C22QX	MS20002C22	AA60030-5-22QX	MS20002-22
AA60030-5-C24QX	MS20002C24	AA60030-5-24QX	MS20002-24

PIN construction:

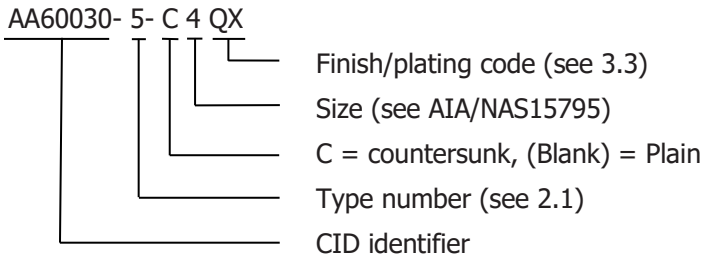

Example Part Numbers:


A-A-60030-5-C16QX = an AIA/NASM20002 – Steel, 1.625 ØA, 1.025 – 1.010 ØB, 1.160 – 1.140 ØC and 0.078 thick, Zinc-Nickel Type K16 plated, countersunk washer.
A-A-60030-5-16QX = an AIA/NASM20002 – Steel, 1.625 ØA, 1.025 – 1.010 ØB, 1.160 – 1.140 ØC and 0.078 thick, Zinc-Nickel Type K16 plated, plain washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VI – Type VI (-6) washer, lock, flat, internal tooth.

A-A-60030 Part Number	Reference Dash number (see AIA/NASM35333)	A-A-60030 Part Number	Reference Dash number (see AIA/NASM35333)	A-A-60030 Part Number	Reference Dash number (see AIA/NASM35333)
CARBON STEEL	CARBON STEEL	CRES	CRES	CRES	CRES
		COMP 410	COMP 410	300 SERIES	300 SERIES
	DASH NO.		DASH NO.		DASH NO.
AA60030-6-35QX	MS35333-35	AA60030-6-69P5	MS35333-69		---
AA60030-6-36QX	MS35333-36	AA60030-6-70P5	MS35333-70	AA60030-6-153P5	MS35333-153
AA60030-6-37QX	MS35333-37	AA60030-6-71P5	MS35333-71	AA60030-6-154P5	MS35333-154
AA60030-6-38QX	MS35333-38	AA60030-6-72P5	MS35333-72	AA60030-6-155P5	MS35333-155
AA60030-6-39QX	MS35333-39	AA60030-6-73P5	MS35333-73	---	---
AA60030-6-40QX	MS35333-40	AA60030-6-74P5	MS35333-74	---	---
AA60030-6-41QX	MS35333-41	AA60030-6-75P5	MS35333-75	---	---
AA60030-6-42QX	MS35333-42	AA60030-6-76P5	MS35333-76	---	---
AA60030-6-43QX	MS35333-43	AA60030-6-77P5	MS35333-77	---	---
AA60030-6-121QX	MS35333-121	---	---	---	---
AA60030-6-44QX	MS35333-44	AA60030-6-78P5	MS35333-78	---	---
AA60030-6-45QX	MS35333-45	---	---	---	---
AA60030-6-46QX	MS35333-46	AA60030-6-80P5	MS35333-80	---	---
AA60030-6-47QX	MS35333-47	AA60030-6-81P5	MS35333-81	---	---
AA60030-6-48QX	MS35333-48	AA60030-6-82P5	MS35333-82	---	---
AA60030-6-49QX	MS35333-49	AA60030-6-83P5	MS35333-83	---	---
AA60030-6-51QX	MS35333-51	AA60030-6-85P5	MS35333-85	---	---

PIN construction:

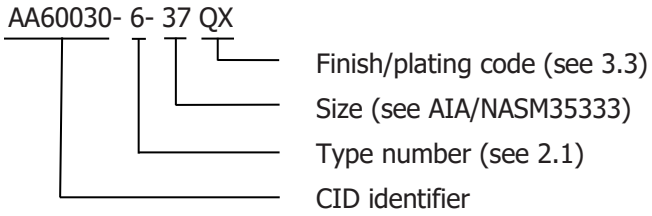

Example part numbers:

AA60030-6-37QX = an AIA/NASM35333 – Carbon steel, nominal size #6 0.138, internal tooth lock washer, Zinc-Nickel Type K16 plated.


AA60030-6-154P5 = an AIA/NASM35333 – 300 Series CRES, nominal size #6 0.138, internal tooth lock washer, passivated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VII – Type VII (-7) washer, lock-spring, helical, regular (medium) series.

A-A-60030 Part Number	Reference Dash Number (from NASM35338)r	A-A-60030 Part Number	Reference Dash Number (from NASM35338)r	A-A-60030 Part Number	Reference Dash Number (from NASM35338)r	A-A-60030 Part Number	Reference Dash Number (from NASM35338)r
Carbon Steel	Carbon Steel	PH BRZ or TIN BRS	PH BRZ or TIN BRS	CRES 300 (Series)	CRES 300 (Series)	CRES 420	CRES 420
AA60030-7-39QX	MS35338-39	AA60030-7-96QX	MS35338-96	AA60030-7-134P5	MS35338-134	AA60030-7-153P5	MS35338-153
AA60030-7-40QX	MS35338-40	AA60030-7-97QX	MS35338-97	AA60030-7-135P5	MS35338-135	AA60030-7-154P5	MS35338-154
AA60030-7-41QX	MS35338- 41	AA60030-7-98QX	MS35338-98	AA60030-7-136P5	MS35338-136	AA60030-7-155P5	MS35338-155
AA60030-7-42QX	MS35338-42	AA60030-7-99QX	MS35338-99	AA60030-7-137P5	MS35338-137	AA60030-7-156P5	MS35338-156
AA60030-7-43QX	MS35338-43	AA60030-7-100QX	MS35338-100	AA60030-7-138P5	MS35338-138	AA60030-7-157P5	MS35338-157
AA60030-7-44QX	MS35338-44	AA60030-7-101QX	MS35338-101	AA60030-7-139P5	MS35338-139	AA60030-7-158P5	MS35338-158
AA60030-7-45QX	MS35338-45	AA60030-7-102QX	MS35338-102	AA60030-7-140P5	MS35338-140	AA60030-7-159P5	MS35338-159
AA60030-7-46QX	MS35338-46	AA60030-7-103QX	MS35338-103	AA60030-7-141P5	MS35338-141	AA60030-7-160P5	MS35338-160
AA60030-7-47QX	MS35338-47	AA60030-7-104QX	MS35338-104	AA60030-7-142P5	MS35338-142	AA60030-7-161P5	MS35338-161
AA60030-7-48QX	MS35338-48	AA60030-7-105QX	MS35338-105	AA60030-7-143P5	MS35338-143	AA60030-7-162P5	MS35338-162
AA60030-7-49QX	MS35338-49	AA60030-7-106QX	MS35338-106	AA60030-7-144P5	MS35338-144	AA60030-7-163P5	MS35338-163
AA60030-7-50QX	MS35338-50	AA60030-7-107QX	MS35338-107	AA60030-7-145P5	MS35338-145	AA60030-7-164P5	MS35338-164
AA60030-7-51QX	MS35338-51	AA60030-7-108QX	MS35338-108	AA60030-7-146P5	MS35338-146	AA60030-7-165P5	MS35338-165
AA60030-7-52QX	MS35338-52	AA60030-7-109QX	MS35338-109	AA60030-7-147P5	MS35338-147	AA60030-7-166P5	MS35338-166
AA60030-7-53QX	MS35338-53	AA60030-7-110QX	MS35338-110	AA60030-7-148P5	MS35338-148	AA60030-7-167P5	MS35338-167
AA60030-7-54QX	MS35338-54	AA60030-7-111QX	MS35338-111	AA60030-7-149P5	MS35338-149	AA60030-7-168P5	MS35338-168
AA60030-7-55QX	MS35338-55	AA60030-7-112QX	MS35338-112	AA60030-7-150P5	MS35338-150	AA60030-7-169P5	MS35338-169
AA60030-7-56QX	MS35338-56	AA60030-7-113QX	MS35338-113	AA60030-7-151P5	MS35338-151	AA60030-7-170P5	MS35338-170
AA60030-7-57QX	MS35338-57	AA60030-7-114QX	MS35338-114	AA60030-7-152P5	MS35338-152	AA60030-7-171P5	MS35338-171

PIN construction:

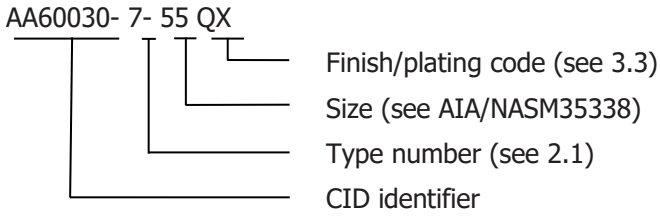

Example part numbers:

A-A-60030-7-41QX = an AIA/NASM35338 – Carbon steel, nominal size #6 (0.138), washer, lock-spring, helical, Zinc-Nickel Type K16 plated.

A-A-60030-7-150P5 = an AIA/NASM35338 – CRES 300 series, 1-1/4-inch nominal size (1.250), washer, lock-spring, helical, passivated.


A-A-60030-7-169P5 = an AIA/NASM35338 – CRES 420, 1-1/4-inch nominal size (1.250), washer, lock-spring, helical, passivated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VIII – Type VIII (-8) washer, rod end, locking.

A-A-60030 Part Number	Reference Part Number (from NAS513)
AA60030-8-4QX	NAS513-4
AA60030-8-5QX	NAS513-5
AA60030-8-6QX	NAS513-6
AA60030-8-7QX	NAS513-7
AA60030-8-8QX	NAS513-8
AA60030-8-9QX	NAS513-9
AA60030-8-10QX	NAS513-10
AA60030-8-12QX	NAS513-12
AA60030-8-14QX	NAS513-14
AA60030-8-16QX	NAS513-16
AA60030-8-18QX	NAS513-18
AA60030-8-20QX	NAS513-20
AA60030-8-22QX	NAS513-22
AA60030-8-24QX	NAS513-24
AA60030-8-26QX	NAS513-26
AA60030-8-28QX	NAS513-28
AA60030-8-30QX	NAS513-30
AA60030-8-32QX	NAS513-32
AA60030-8-34QX	NAS513-34
AA60030-8-36QX	NAS513-36

PIN construction:

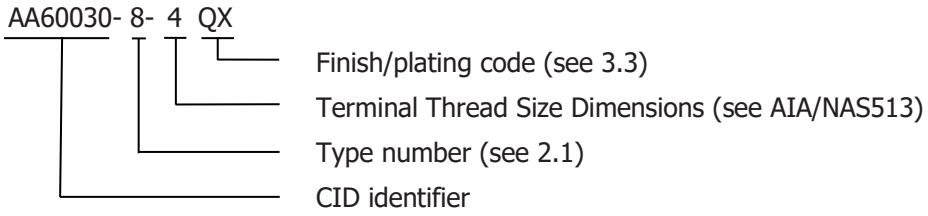

Example part numbers:

AA60030-8-4QX = an AIA/NAS513 – Washer, rod end, locking, 1/4-28 UNF-3A, spring steel, Zinc-Nickel Type K16 plated.

AA60030-8-18QX = an AIA/NAS513 – Washer, rod end, locking, 1 1/8-12 UNF-3A, spring steel, Zinc-Nickel Type K16 plated.

7.2 Source documents.

7.2.1 FAR: Copies of the Federal Acquisition Regulations are available online from https://www.acquisition.gov/browse/index/far.

7.2.2 Executive order (EO). Copies of EO 14057 are available online from https://www.fedcenter.gov/_kd/go.cfm?destination=ShowItem&Item_ID=38808

7.2.3 Military specifications: Copies of military specifications are available online from https://quicksearch.dla.mil.

7.2.4 AIA documents: Copies of Aerospace Industry Association are available online from https://www.aia-aerospace.org.

7.2.5 ASTM documents: Copies of American Society for Testing and Materials International Standards are available online from https://www.astm.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.2.6 SAE documents: Copies of Society of Automotive Engineers International are available online from https://www.sae.org.

7.3 Ordering data. The contract or order should specify the following:

a. Title, number and date of this CID.
b. National stock number, (if available).
c. Part number.

7.4 Key words:

a. Steel
b. CRES
c. Aluminum

MILITARY INTERESTS:

Custodian:
Army – AT
Navy – OS
Air Force – 71
DLA – GS

Review activities:
Army – AR, AV, CR4, MI
Navy – AS, YD
DLA – GS7

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
Army – AT

(Project 5310-2023-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.