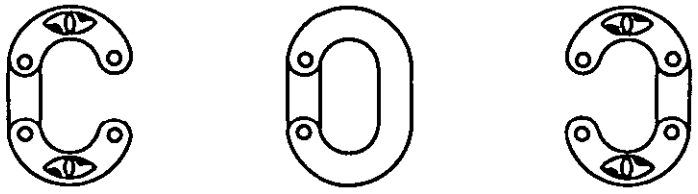

DASH NUMBER	SIZE	OUTSIDE DIMENSIONS (APPROX)	WEIGHT PER DOZEN (APPROX LBS)	Ⓐ BREAKING LOAD MIN
Ⓐ -21	3/16	1-1/4 x 3/4	3/8	2600
-1	1/4	1-1/2 x 1	3/4	4500
-2	5/16	1-11/16 x 1-3/16	1	6800
-3	3/8	2-1/16 x 1-3/8	2	9300
-4	7/16	2-3/8 x 1-1/2	3-1/8	12500
-5	1/2	2-5/8 x 1-3/4	4-1/2	16500
-6	9/16	3 x 1-15/16	6-5/8	20500
-7	5/8	3-5/16 x 2-3/16	9	25000
Ⓐ ~~-8~~	~~11/16~~	~~3-1/2 x 2-5/16~~	~~11~~	~~29300~~
-9	3/4	3-7/8 x 2-1/2	14-1/2	35400
-10	7/8	4-1/2 x 2-15/16	20-1/4	48000
-11	1	5 x 3-1/4	29	62000
-12	1-1/8	5-5/8 x 3-1/2	40	78000
Ⓐ -22	1-1/4	6-1/8 x 4	53-1/2	96000

Ⓐ *CANCELLED IN PART after 5 December 1975. No other superseding standard. See RR-C-271 for superseding links.

NOTES:

Ⓐ 1. MATERIAL: Forged carbon steel in accordance with Grade C of RR-C-271.

Ⓐ 2. PROTECTIVE COATING: Zinc coating, hot-dip galvanized, in accordance with ASTM A153 or electro deposited in accordance with QQ-Z-325, type II, class 3.

3. DIMENSIONS: All dimensions are in inches unless otherwise specified.

4. PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS87008-1.

5. Referenced documents shall be of the issue in effect on date of invitations for bid.

6. For design feature purposes this standard takes precedence over procurement documents referenced herein.

REVIEWER: CL, IS, ME, NI
USER: AT, AV

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1 JULY 63 REVISED Ⓐ 5 DEC 75

P.A.	4C
Other Cust	52 SH

TITLE: LINK, CHAIN- CONNECTING OR REPAIR

MILITARY STANDARD
MS87008

PROCUREMENT SPECIFICATION: MR-C-271

SUPERSEDES: SNDY1

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:302
Check the source to verify that this is the current version before use.