MILITARY SPECIFICATION

MANUALS, TECHNICAL: BATTLEFIELD DAMAGE ASSESSMENT AND REPAIR, PREPARATION OF

This specification is approved for use by the Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 General. This specification covers the format, style, and content requirements for preparation of technical manuals (TM) used for battlefield damage assessment and repair (BDAR) of weapon systems/equipment damaged or failed on the battlefield. It covers content requirements which are mandatory, and some which are optional but become mandatory when applicable, as determined and specified by the contracting activity. Examples at the rear of this specification are typical and may be adapted to fit the specific equipment or situation being covered.

1.2 Application. This specification is for preparation of TM's used in support of battlefield damage assessment and repair (fix forward) of major commodities/systems.

1.3 Limitation. This specification covers only assessment and repair of equipment failures occurring on the battlefield. This repair is sometimes limited to such means of fixing as bypassing, patching, or jury-rigging components, or the use of alternative procedures to restore the equipment/system performance to a minimum operating condition.

1.3.1 BDAR procedures. Fix procedures in BDAR TM's are for use in combat only. Standard maintenance procedures are used as soon as practicable.

1.3.2 BDAR training procedures. Fixes that may be performed during training will be identified in appendix E of the applicable TM. (See 3.11.7.5)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: USAMC Materiel Readiness Support Activity, ATTN: AMXMD-MP, Lexington, KY 40511-5101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC NO A4378

AREA TMSS

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

1.3.3 Maintenance level. Unless otherwise specified, repair functions covered in BDAR TM's are accomplished by the following maintenance levels:

a. Unit maintenance - performed by operator/crew or by forward organizational maintenance team (MT).

b. Intermediate maintenance - performed by intermediate direct support and intermediate general support maintenance support teams (MST), when damage exceeds unit repair capability. When required repair time or tactical conditions dictate, the damaged/failed item will be recovered or evacuated as appropriate.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications standards and handbooks. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-38784	-	Manuals, Technical: General Style and Format Requirements

STANDARDS

MILITARY

MIL-STD-12	-	Abbreviations for Use on Drawings, and in Specifications, Standards and Technical Documents
DOD-STD-100	-	Engineering Drawing Practices

HANDBOOKS

MILITARY

MIL-HDBK-63038-1	-	Technical Manual Writing Handbook

(Copies of specifications, standards, handbooks, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2.1.1 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General requirements. Battlefield damage assessment and repair (BDAR) technical manuals (TM) shall follow the format and content requirements specified herein. All requirements herein are mandatory except for "optional" requirements which are listed on the Content/Format Selection Summary List (Appendix A). Appendix A must be completed by the contracting activity before this specification can be invoked contractually. In general, unless otherwise specified herein, style and format shall be in accordance with MIL-M-38784.

3.2 Format

3.2.1 Divisions. Battlefield damage assessment and repair (BDAR) technical manuals (TM) shall be divided into volumes, chapters, sections, paragraphs, appendixes, glossary, and indexes as appropriate. Specific format and content of these divisions shall be as specified and as indicated by a completed Content/Format Selection Summary List.

3.2.1.1 Volumes. When a technical manual exceeds a thickness of two inches (about 1000 pages), the manual shall be divided into volumes which shall be numbered consecutively.

3.2.1.2 Chapters/sections/paragraphs. Numbering and format of chapters, sections, paragraphs, and sub-paragraphs shall be in accordance with MIL-M-38784 except; decimal numbering shall not be used. The boxed-in statements, "BDAR FIXES SHALL BE USED ONLY IN COMBAT OR FOR TRAINING AT THE DISCRETION OF THE COMMANDER. (AUTHORIZED TRAINING FIXES ARE LISTED IN APPENDIX E.) IN EITHER CASE, DAMAGES SHALL BE REPAIRED BY STANDARD MAINTENANCE PROCEDURES AS SOON AS PRACTICABLE," shall be centered immediately below each chapter title. See figure 1. Chapters that contain two or more procedures for repair shall have an index preceding the repair procedures as specified in 3.11.4.1c.

3.2.1.3 Appendixes/glossary/index. Location, identification, and page numbering of appendixes, glossary, and index shall be in accordance with MIL-M-38784.

3.3 Illustrations. Illustrations shall support procedural steps and other text to provide clarity of understanding so that rapid repairs can be made. Illustrations shall b e located as near to the text that they support as practical.

3.3.1 Line drawing. Illustrations shall consist of line drawings only. Exploded views shall be used to show detail of pertinent areas. See figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.2 Symbols. Symbols used on illustrations shall be in accordance with DOD-STD-100. New symbols not covered by DOD-STD-100 shall be defined in the introduction portion of the chapter/section where new symbols are used, and they shall be used only when approval is granted by the contracting activity.

3.3.3 Items/callouts. Items/callouts on figures shall be identified by item name where space permits. Where space does not permit, legends shall be used.

3.3.4 Foldouts. Unless otherwise specified, foldouts shall not be used.

3.4 Tables. Tables shall be arranged, numbered and titled in accordance with MIL-M-38784.

3.5 Warnings, cautions, and notes. Warnings, cautions, and notes shall comply to the requirements of MIL-M-38784.

3.6 Procedural steps. Detailed step-by-step procedures shall be used to instruct the user how to test/check/inspect, assess, operate, maintain/repair/fix, or perform other BDAR functions. The second person imperative mood shall be used. Each step shall begin with an action word, shall be concise, and shall contain only one action. Each set of step-by-step procedures shall be given an overall title and shall be preceded by information that the user needs (e.g., location, equipment, peculiar tools, material, time, and personnel required).

3.7 Operating procedures. Operating procedures in BDAR manuals shall be restricted to testing a system, subsystem, or component for the purpose of damage assessment, or testing after a field expedient repair has been performed. If any change to normal operating procedures is made, the new procedures to be follwed must be given.

3.8 Terminology/nomenclature. Terms used shall be familiar to the intended user and shall be used consistently throughout the BDAR manual. Items shall be referred to by their Federal item name or nomenclature when applicable.

3.9 Abbreviations and acronyms. Abbreviations and acronyms shall be held to a minimum. Abbreviations shall be in accordance with MIL-STD-12. Terms identified by acronyms shall be spelled out and identified at their first occurrence within each major division of the manual (i.e., chapters and sections).

Source: https://assist.dla.mil --Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.10 References. Unless otherwise specified, information published in a current technical manual that exceeds one page in length, shall not be repeated in manuals being developed. The manual containing this information shall be referenced in that portion of the BDAR manual where the information is needed. In addition, each referenced document shall be listed in the BDAR TM reference appendix.

3.11 Content. Unless otherwise specified, technical manuals, (TM's) prepared to provide instruction for making battlefield damage assessment and repair shall consist of data specified herein. Content shall be directed to fix-forward battlefield conditions, that is, repairs must be made as quickly as possible and to the extent necessary to restore or maintain the applicable equipment/system. Unless otherwise specified, content and order of presentation shall be as follows:

a. Front Matter.

b. Chapter 1, General Information.

c. Chapter 2, Assessing Battlefield Damage.

d. Chapter 3, General Repair.

e. Chapter 4 thru ( ), (major functional group)-Total number of chapters determined by the number of major functional groups applicable.

f. Last Chapter, Auxiliary Equipment (if applicable).

g. Appendixes.

h. Glossary.

i. Index.

3.11.1 Front matter. Front matter shall consist of a cover/title page, warning page, table of contents, and how to use this manual instructions.

3.11.1.1 Cover/title page. The cover/title page shall be configured as shown in figure 3 and include the following:

a. Technical manual designator/publication number.

b. The words "Technical Manual."

c. The manual type "Battlefield Damage Assessment and Repair" on black background.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

d. Nomenclature (i.e., item name and model number or collective equipment description)/national stock number (if applicable). When space on the cover is not adequate, this information shall continue on the back of the cover page.

e. National stock number (end item), if applicable.

f. Front cover index. Front cover index shall be in accordance with MIL-HDBK-63038-1.

g. Name of authorizing agent (e.g., Headquarters, Department of the Army).

h. The publication date.

i. Representative line drawing of end item/system.

j. Appropriate distribution statement, destruction notice, and export control warning notice (if applicable) placed on the cover in accordance with DOD Directive 5230.24 as provided by the contracting activity.

3.11.1.2 Warning page. A warning page(s), located on back of cover or immediately following the cover page, shall include each general type of warning and warning symbol used within the technical manual. This page(s) shall not list specific warnings that pertain to specific steps, but shall include general subject data (e.g., radiation, chemicals, voltages, gas pressure, laser light, etc.) as shown in figure 4.

3.11.1.3 Reporting errors/Table of contents. The table of contents shall be preceded by a Reporting Errors and Recommending Improvements block as shown in figure 5. The title, "Table of Contents," shall be centered above the table. When continued on subsequent pages, the title shall be centered at the top of each page and followed by "-CONT." Each major division of the TM shall be listed by chapter and section and the exact title of the chapter or section used within the manual. The number of the first page of each chapter and section shall be listed under the column heading "Page." Basic layout shall conform to figure 5.

3.11.1.4 How to use this manual. Instructions on how to use this manual shall begin on the page following the table of contents. The title "HOW TO USE THIS MANUAL" shall be centered at the top of the page. These instructions shall not repeat explanations that are given within the chapters or sections; such as, instructions on "how to use fault assessment tables." Illustrations charts, and tables shall be used here when text alone cannot convey the thought adequately.

3.11.2 Chapter 1, General information. This chapter and each subsequent chapter shall begin on a righthand page. This chapter shall contain information that is general in nature. It shall inform the user/reader of the purpose and scope of the manual and its relationship to user personnel, other publications, and the end item/system it supports. In addition, the chapter shall include definitions, standards, practices, identification of responsibilities, and tasks to be performed.

Source: https://assist.dla.mil --Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.11.2.1 BDAR fixes statement. Chapter 1 and each subsequent chapter shall contain the boxed-in statement as shown in figure 1. This statement shall be centered below the chapter title on the first page of each chapter.

3.11.2.2 Section 1, Introduction. This section shall state the purpose and scope of the TM and how it is applied to the task of BDAR. Terms used in the TM that are new or peculiar to BDAR shall be defined. As a minimum, this section shall contain paragraphs as follows:

a. Purpose.

b. Scope.

c. Application.

d. Definitions.

e. Quality deficiency report/equipment improvement recommendations (QDR/EIR). This paragraph shall contain the following statement: "If your (insert short item name) needs improvement, let us know. Send an EIR. You, the user, are the only one who can tell us what you don't like about your equipment. Let us know why you don't like the design. Put it on an SF 368 (Quality Deficiency Report). Mail it to us at (enter address of proponent activity). We will send you a reply."

3.11.2.3 Section II, Standards and practices. This section shall contain information pertaining to standards and practices peculiar to combat conditions. It shall include, as a minimum, the paragraph headings and data (expanded as applicable) as follows:

a. BDAR Characteristics - explanation of the expediency of repair, reason for deviation from standard maintenance practices, need to take greater risks, and other characteristics peculiar to repair under combat conditions.

b. Waiver of precautions - reference to deviations from normal peace time precautions, and if such deviations are summarized in another portion of the TM, reference shall be made to that portion.

c. Operating characteristics - minimum functional combat capability (MFCC) criteria for the applicable end item/system.

d. Training - explanation/rationale concerning use of BDAR fixes for training.

3.11.2.4 Section III, Tasks and responsibilities. This section shall consist of tasks that may be required as a result of battlefield damage. The person/group responsible for each task shall be identified. The tasks shall appear in the order in which they should be performed. This information shall be presented in narrative form. This section shall include the following paragraphs:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

a. Tagging/identifying BDAR repairs - instructions for identifying components effected by BDAR fixes.

b. Reports - instructions for completing reports resulting from BDAR fixes.

3.11.3 Chapter 2, Assessing battlefield damage. Chapter 2 shall provide information for assessing battlefield damage to the end item/component covered in the BDAR TM. The chapter shall contain Section I, Introduction, and Section II, General Fault Assessment Tables.

3.11.3.1 Section I, Introduction. The primary purpose of this section shall be to introduce the assessment table(s) in Section II. It shall contain paragraphs that will cover the scope of the chapter and application of assessment tables.

3.11.3.2 Section II, General fault assessment tables. This section shall contain assessment tables that pertain to the overall system or major subsystems and its capability to perform its mission essential functions. These tables shall be so developed that they will lead the user to a decision or another chart/table in the associated chapter that will further aid in analyzing/assessing damage. As specified by the contracting activity, the format of assessment tables shall be either a flow chart diagram, figure 6, or table, figure 7.

3.11.4 Chapter 3, General repair. Unless otherwise specified, chapter 3 shall provide information for battlefield repair of items that are not necessarily associated with a specific component or subsystem of the end item.

3.11.4.1 Section I, Introduction. This section shall contain paragraphs as follows:

a. Scope - brief statement that describes the purpose and application of the overall coverage of the chapter.

b. Assessment procedure - a general statement(s) concerning the assessment of damage and repair required pertaining to type of repairs covered.

c. Repair procedure index - list of all procedures contained in the chapter, listed in the order in which they appear and formatted in accordance with figure 8. Procedures authorized for training and listed in appendix E of the TM shall be boxed in.

3.11.4.2 Section II, (_____). This section and each subsequent section in the chapter shall be titled to represent the repair item covered therein. The format and content of this section shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Delete 4.8. D, page 188, Review Activities, Army TM:

a. General - remarks concerning general nature and causes related to the damage and repair of the item. These remarks shall be brief.

b. (Item name, trouble) - item name and the trouble shall be used as the paragraph sidehead. The sidehead shall be followed with a general statement(s) concerning the particular type of trouble and repair to be made. Statement(s) shall be brief and as concise as possible. Subparagraphs shall be as follows:

(1) Limitations - this statement(s) shall identify the limits that would be imposed on the equipment/end item, in relation to operational capability, if the fix that follows is performed.

(2) Personnel/time required - the number of personnel and time required to accomplish the fix shall be listed as follows:

1 soldier - 1.0 hrs (express time in decimal point hours to the nearest one-tenth hour).

(3) Materials/tools - list of materials and tools (peculiar) needed to make the BDAR fix. Following each item listed shall be a reference (in parenthesis) to that item number and appendix (e.g., "hose, (item 4, appx c))." Reference to tools shall reference instructions for tool fabrication when applicable. Any other necessary information (such as quantities and sizes) shall be provided.

(4) Procedural steps - each step shall be listed numerically and placed in sequential order in which it will be performed. Steps shall be as prescribed in 3.6. The last procedural step for every BDAR fix shall be: "Record BDAR action taken. When mission is complete, as soon as practical, repair the equipment/system using standard maintenance procedures."

c. Options - more than one method of making the same repair/fix. Options shall be listed in order of effectiveness and listed consecutively as option 1, option 2, etc. Each option provided under the item name/trouble paragraph sidehead (b. above) shall contain subparagraphs: Limitations, Personnel/time required, Materials/tools, and Procedural steps. Alternatives that do not include fixes shall also be listed as options.

d. (Item name, category) - when the basic item, identified in the section title, is divided into categories or types, each specific item shall be titled and covered within a separate paragraph. Each of these paragraphs shall contain only the information that applies to that specific item. For example: Information or procedures under a heading "high pressure" shall pertain to high pressure; low pressure information/procedures (if applicable) shall appear under the heading, "low pressure."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.11.4.3 Section III, IV, V, etc. ( ). The total number of sections required for chapter 3 shall be determined by the nature and complexity of the end item. The format and content for these sections shall be as specified in 3.11.4.2.

3.11.5 Chapter 4 thru ( ), (Major functional group). Unless otherwise specified, these chapters shall be titled, arranged, and correspond to the functional groups as they appear in the maintenance allocation chart (MAC) and the repair parts and special tools list (RPSTL). The total number of chapters in the BDAR TM shall be determined by the number of major functional groups applicable to the equipment/system covered by the manual.

3.11.5.1 Section I, Introduction. This section shall contain paragraphs as follows:

a. Scope - brief statement that describes the purpose and application of the overall coverage of the chapter.

b. Assessment procedure - flow chart or table formatted in accordance with figure 6 or 7. This assessment procedure shall apply to the subsystem or major component identified by the chapter title. The procedure shall direct or reference the user to the instructions for making fixes/repairs. References shall indicate chapter, section, paragraph, or another document, as appropriate. The assessment procedure shall be developed and arranged so that logical and expedient methods are used to locate trouble.

c. Repair procedure index - list of all procedures contained in the chapter, listed in the order in which they appear and formatted in accordance with figure 8. Procedures authorized for training and listed in appendix E of the TM shall be boxed in.

3.11.5.2 Section II, ( ). This section and each subsequent section in the chapter (the total number of sections shall be determined by the nature and complexity of the subsystem or major component) shall follow the format specified in 3.11.4.2.

3.11.6 Last chapter, chapter ( ) auxiliary equipment. Auxiliary equipment shall be covered in the last chapter of the BDAR TM. The format and content, in general, shall conform to the same requirements established for the chapters covering major functional groups. (See 3.11.5.)

3.11.7 Appendixes. Appendixes shall be used with BDAR TM's to provide lists of supplies specifically provided, or available to aid in performing BDAR fixes. When applicable, appendixes shall immediately follow the last chapter and shall appear in the order as presented in 3.11.7.1 through 3.11.7.5. Each appendix shall have a brief introduction stating its purpose. All tables and charts shall be simple and self explanatory. The BDAR fix statement is required at the beginning of each appendix. See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.11.7.1 Appendix A, references. Publications referenced in the TM text shall appear in alphanumerical order by publication number. The title of publications shall be on the same horizontal line as the publication number. See figure 9.

3.11.7.2 Appendix B, special or fabricated tools. All tools and test equipment called out in the TM that are not common or require fabrication to perform BDAR fixes shall be listed by an appropriate tool name or function. When fabrication is required, instructions (and material list) shall be included. See figure 10.

3.11.7.3 Appendix C, expendable/durable supplies and materials. This appendix shall contain a list of expendable/durable supplies and materials that are available for BDAR fixes. Material shall be listed alphabetically by item name. A brief description shall follow the item name. An item number shall be assigned to the item for reference/identification only. For example see figure 11 and 12.

3.11.7.4 Appendix D, substitute materials/parts. This appendix shall list materials and parts that may be used for BDAR fixes. Lists or tables shall include the primary material/part, the substitute/alternate material/part, and remarks (when applicable) that identify the limitations or degradation effected by use of the substitutes. The appendix shall be divided into sections by material type. When sections are required, Section I shall be titled introduction and shall provide a general explanation of the purpose and content of the other sections. When applicable, a section shall be dedicated to petroleum, oil and lubricant (POL) substitutes. For example of alternate/substitute material listing see figure 13.

3.11.7.5 Appendix E, BDAR training procedures. This appendix shall list all BDAR fixes that have been approved for training. The fix (training) procedures shall be grouped by major system(s) or components(s) as they appear in the TM. Each procedure shall be cross-referenced to the paragraph where it appears. For example see figure 14.

3.11.7.6 Appendixes - other. When applicable, other appendixes shall be included.

3.12 Glossary. Unless otherwise specified, the BDAR TM shall contain a glossary containing terms and acronyms that are peculiar to the TM. See MIL-M-38784.

3.13 Index. The BDAR TM shall contain an alphabetical index listing pertinent subjects under every topic for which users are likely to look. See MIL-M-38784.

4. QUALITY ASSURANCE PROVISIONS

4.1 Validation. The contractor shall perform all (i.e., 100 percent) repair (fix) procedures contained in the BDAR TM to validate accuracy and adequacy of the content. When approved by the contracting activity,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

the contractor shall perform simulated procedures in lieu of performing actual procedures that would damage the equipment. The contractor, at the request of the Government, shall make provisions for the Government to observe the contractor during performance of validation. Content that is not technically accurate, shall be corrected by the contractor to meet validation requirements.

4.2 Validation certification. When specified in the contract or order, a validation certification shall be completed at the end of each validation effort (see 6.2.2).

4.3 Verification. The contractor shall provide facilities and access for the Government to verify content accuracy of the BDAR TM prior to, or concurrently with, acceptance of the BDAR technical manual.

5. PACKAGING

(See MIL-M-38784).

6. NOTES

6.1 Intended use. Battlefield damage assessment and repair manuals prepared in accordance with this specification are for use on the battlefield where repair is limited to such means as bypassing, patching, or jury-rigging components to restore the equipment/system performance to a minimum operating condition.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type of equipment/system publication required (3.1).

c. Distribution statement, destruction notice, export control warning 3.11.1.1.

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirement list (CDRL), the data requirement(s) identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with CDRL incorporated in the contract. When the provisions of DOD FAR Supplement Subpart 27.475-1 are invoked and use of DD Form 1423 is not required, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the paragraph indicated below.

Paragraph	Data Requirement	Applicable DID No.
4.2	Validation certification	DI-M-2196

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

(Copies of DID's required by contractors in connection with specific acquisition functions should be obtained from the Naval Publications Form Center or as directed by the Contracting Officer.)

6.3 Definitions.

6.3.1 Battlefield damage. This term includes all incidents such as combat damage, random failures, operator errors, accidents, and wear-out failures that occur on the battlefield and which prevent the equipment/end item from accomplishing its mission.

6.3.2 Damage assessment. A procedure to rapidly determine what is damaged, whether it is repairable, what assets are required to make the repair, who can do the repair, (e.g., crew, maintenance team (MT), or maintenance support team (MST)), and where the repair should be made. The assessment procedure includes the following steps:

1. Determine if the repair can be deferred, or if it must be done.
2. Isolate the damaged areas and components.
3. Determine which components must be fixed.
4. Prescribe fixes.
5. Determine if parts or components, materials, and tools are available.
6. Estimate the manpower and skill required.
7. Estimate the total time (clock-hours) required to make the repair.
8. Establish the priority of the fixes.
9. Decide if recovery is necessary and to what location.

6.3.3 Evacuation. A combat service support function which involves the movement of recovered materiel from a main supply route, maintenance collection point, or maintenance activity to higher categories of maintenance. The materiel may be returned to the user, to the supply system for reissue, or to property disposal activities.

6.3.4 Maintenance collection point. A point operated by intermediate (AVIM and AVIM intermediate) support maintenance units for the collection of equipment for repair.

6.3.5 Maintenance support team (MST). A team consisting of direct support/general support mechanics and technical specialists, who are trained in assessing battle damage in addition to their specialty.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.3.6 **Maintenance team (MT).** A team consisting of organizational mechanics, who may be trained in assessing battle damage and field repair procedures.

6.3.7 **Recovery.** Retrieval of immobile, inoperative, or abandoned materiel from the battlefield or immediate vicinity, and its movement to a maintenance collection point, the main supply route, or a maintenance activity for disposition, repair or evacuation.

6.3.8 **Repair or fix.** Any expedient action that returns a damaged part or assembly to acceptable operating condition.

6.4 **Subject term (key word) listing.**

1. Battlefield damage.
2. Damage assessment.
3. Evacuation.
4. Recovery.
5. Repair or fix.

6.5 **Supersession data .** This supersession includes allowance for BDAR fixes to be used for training, when authorized. Supersession or changes are indicated by change bars next to the change on the outer edge of the page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

CHAPTER 4

TRANSMISSION AND FINAL DRIVES

BDAR FIXES SHALL BE USED ONLY IN COMBAT OR FOR TRAINING
AT THE DISCRETION OF THE COMMANDER
(AUTHORIZED TRAINING FIXES ARE LISTED IN APPENDIX E)
IN EITHER CASE DAMAGES SHALL BE REPAIRED BY STANDARD
PROCEDURES AS SOON AS PRACTICABLE

SECTION I. Introduction

4-1. Scope.

This chapter contains the fault assessment and expedient repair procedures available to find and fix battlefield damage to the transmission (including transmission oil cooler, steering, and brakes) and the final drives.

FIGURE 1. Example - BDAR fixes statement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

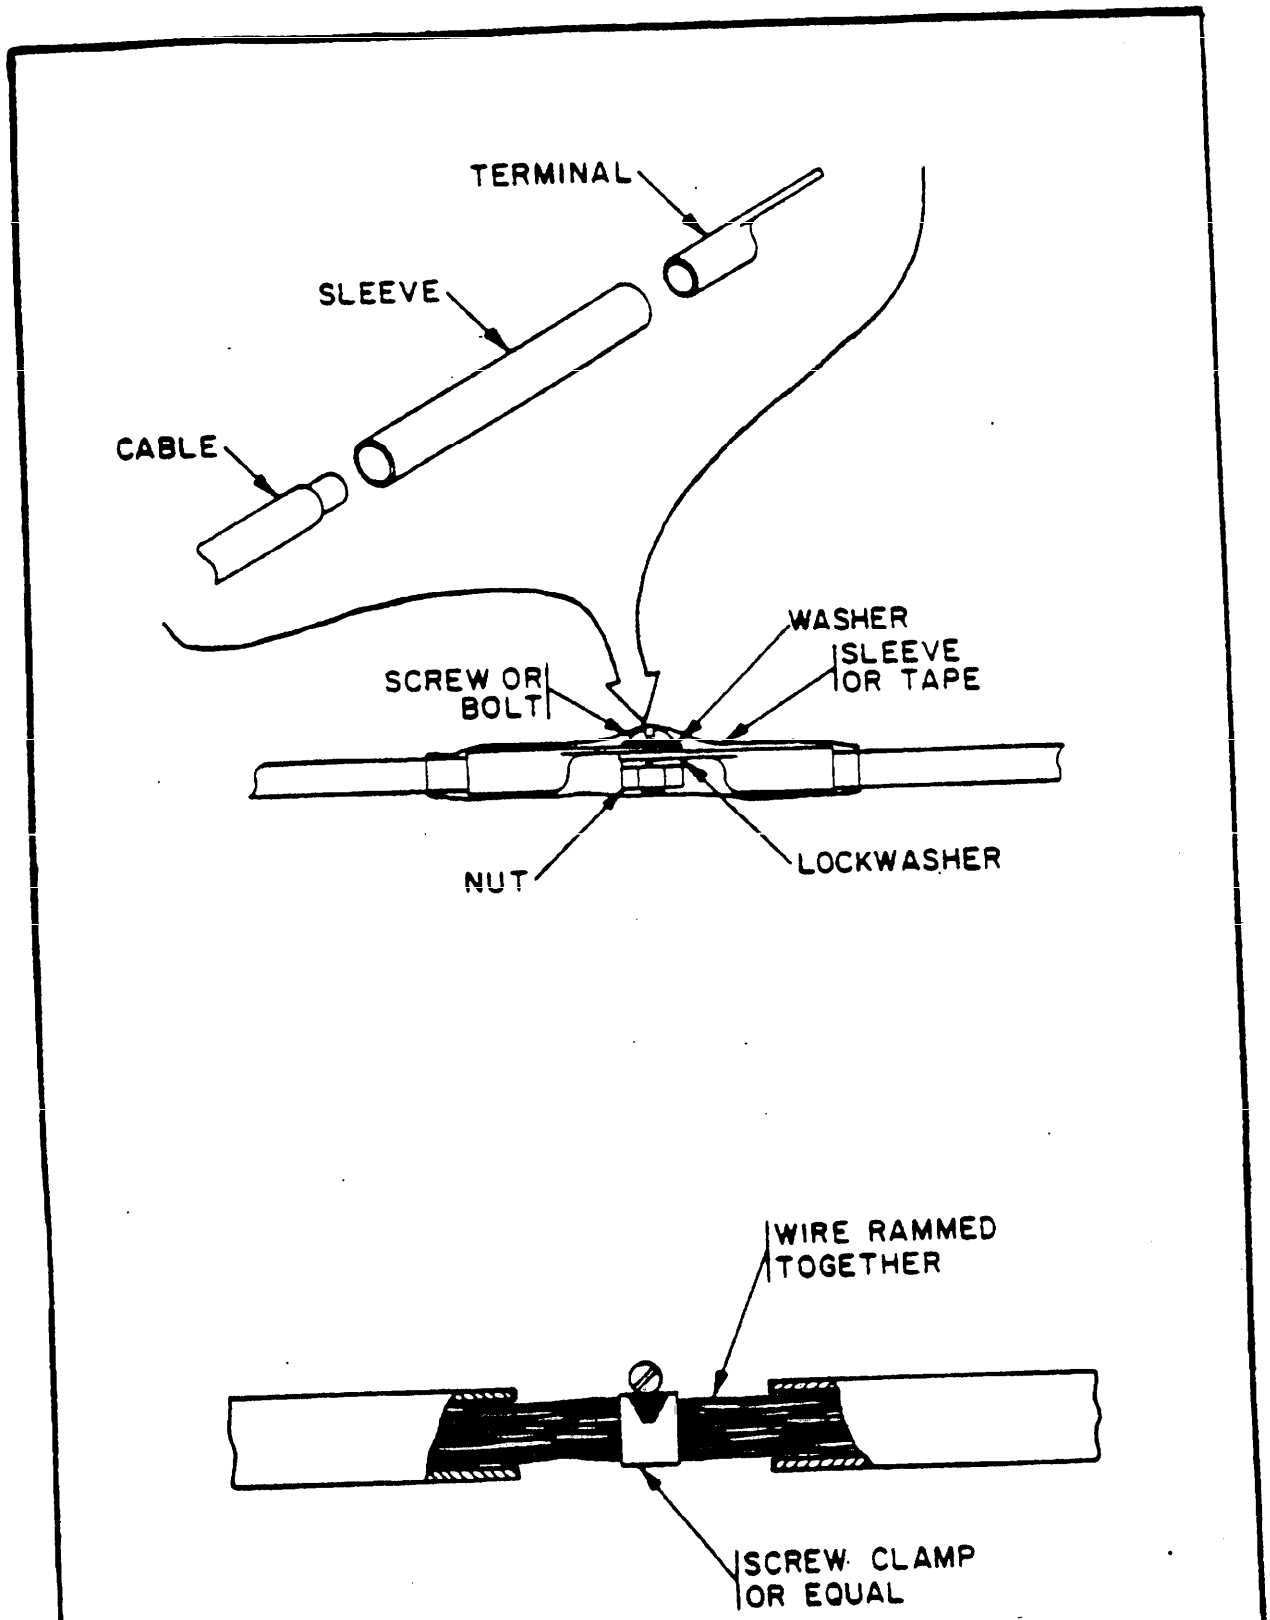


FIGURE 2. Example - line drawings.

Source: https://assist.dla.mil - Downloaded: 2026-10-26 10:42:22
Check the source to verify that this is the current version before use.

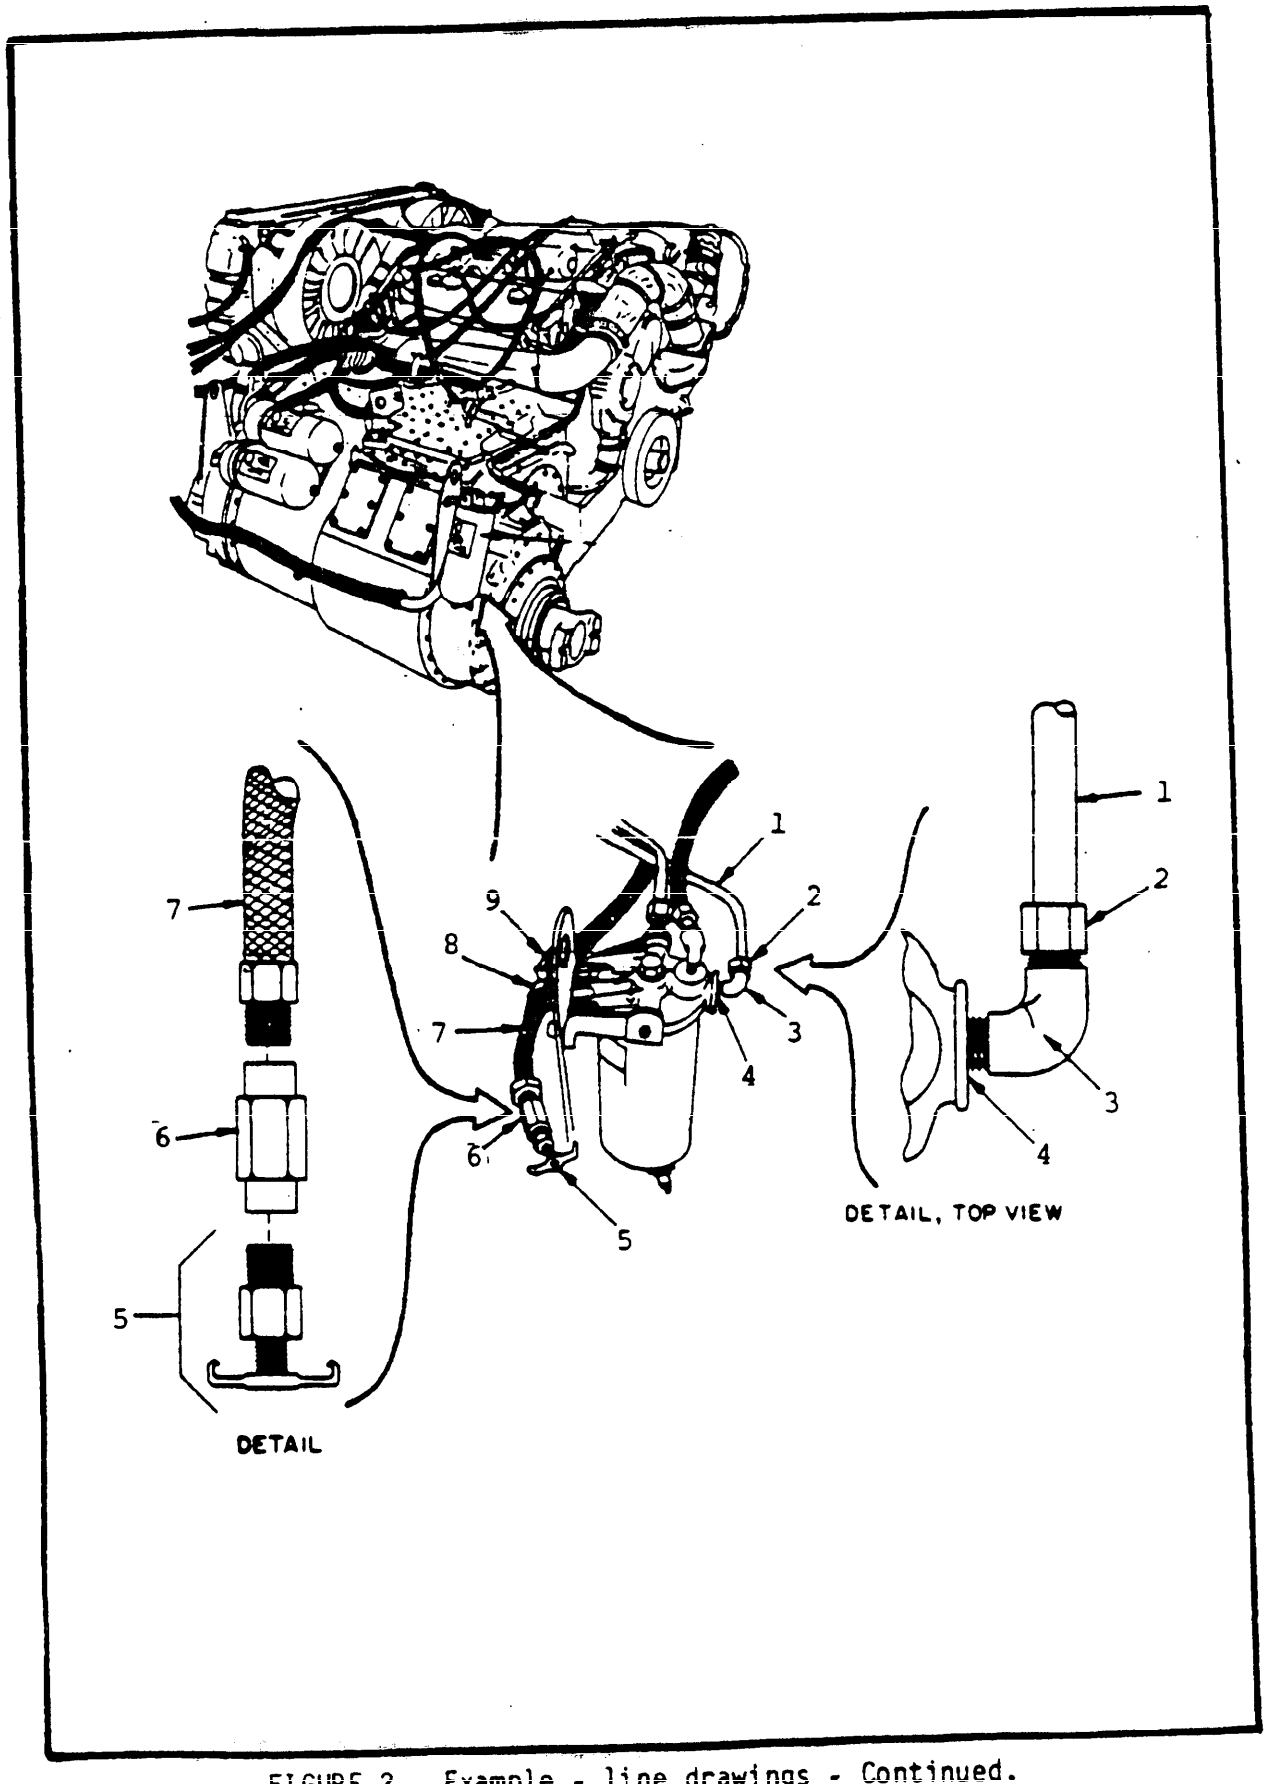


FIGURE 2. Example - line drawings - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

corrective activity or as directed by the contracting ... be obtained from the


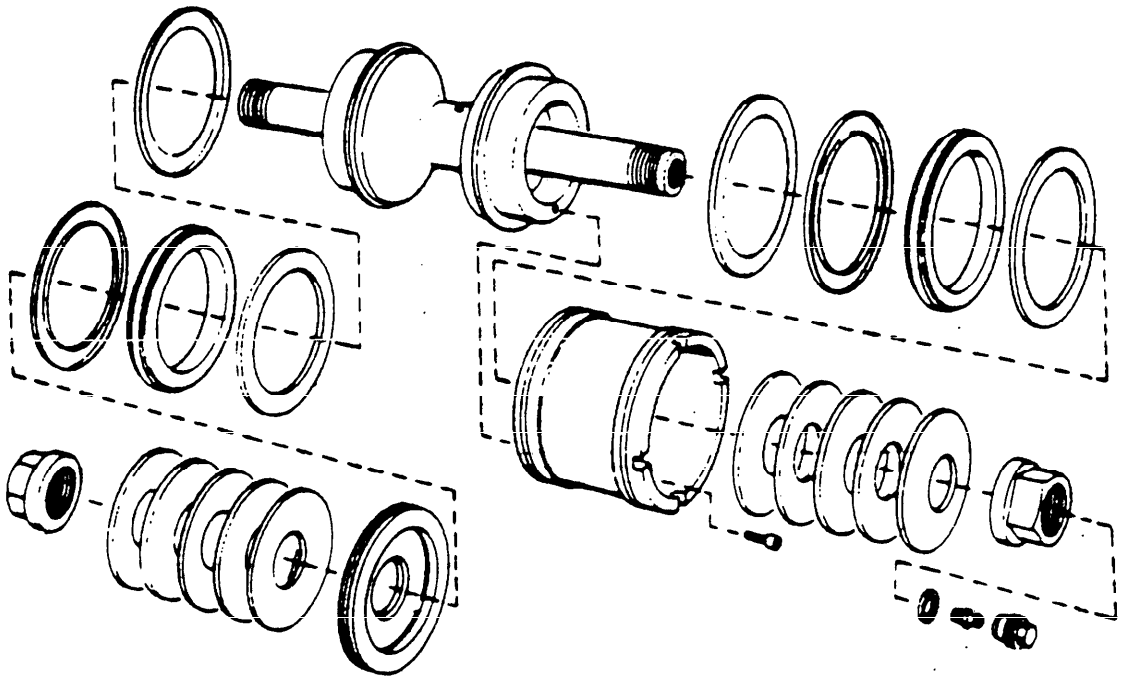


FIGURE 2. Example - line drawings - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM 9-XXXX-XXX-BD

TECHNICAL MANUAL

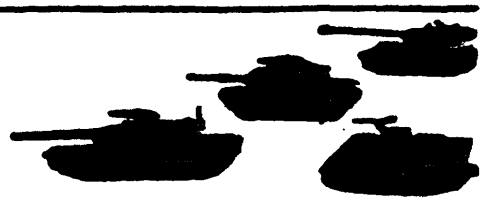

BATTLEFIELD DAMAGE ASSESSMENT AND REPAIR

FOR

COMBAT VEHICLES

ITEM NSN INSIDE FRONT COVER

CHAPTER 1 INTRODUCTION
CHAPTER 2 ASSESSING BATTLEFIELD DAMAGE
CHAPTER 3 GENERAL AUTOMOTIVE COMPONENTS
CHAPTER 4 ENGINE
CHAPTER 5 FUEL SUPPLY STSTEM
CHAPTER 6 COOLING SYSTEM
CHAPTER 7 ELECTRICAL SYSTEM
CHAPTER 8 POWERTRAIN/STEERING
CHAPTER 9 BRAKES
CHAPTER 10 TRACK AND SUSPENSION
CHAPTER 11 HYDRAULIC SYSTEM
CHAPTER 12 ARMOR
CHAPTER 13 ARMAMENT AND FIRE CONTROL
CHAPTER 14 COMMUNICATION SYSTEM
APPENDIX A ALTERNATE SOURCES OF SUPPLY
APPENDIX B SPECIAL AND FABRICATED TOOLS
APPENDIX C POL SUBSTITUTES

HEADQUARTERS, DEPARTMENT OF THE ARMY

(date—month—year)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FIGURE 3. Example - cover/title page.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

WARNING

RADIATION HAZARD



Co 60

Tube types OA2 and 6630/PL 35 (TR tube) used in this equipment contain radioactive material (para 0-0). These tubes are potentially hazardous when broken, see qualified medical personnel and the Safety Director if you are exposed to or cut by broken tubes. for first aid instructions see TB 750-237 and AR 755-15. Use extreme care in replacing these tubes (para 0-0) and follow safe procedures in their handling, storage, and disposal (para 0-0). Refer to paragraph 0-0 and to TB 750-237 and AR 755-15 for instructions on handling, storage, and disposal of radioactive material.

Never place radioactive tubes in your pocket.

Use extreme care not to break radioactive tubes while handling them.

Never remove radioactive tubes from cartons until ready to use them.

ELECTROMAGNETIC RADIATION

DO NOT STAND IN THE DIRECT PATH OF THE ANTENNA WHEN THE POWER IS ON! DO NOT WORK ON THE WAVE GUIDES WHILE THE POWER IS ON!

High freqency electromagnetic radiation can cause fatal internal burns. It can literally "cook" internal organs and flesh if you feel the slightest warming effect while near the equipment MOVE AWAY QUICKLY!

FIGURE 4. Example - warning page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXXX-XXX-BD

Technical Manual

X-XXXX-XXX-BD

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC

Technical Manual
for
BATTLEFIELD DAMAGE ASSESSMENT AND REPAIR
Tank, Combat, Full-Tracked: 105 -MM Gun, M1
(2350-01-061-2445)
General Abrams

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS
You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publication and Blank Forms), or DA Form 2028-2 (enter name of address of preparing activity). A reply will be furnished to you.

TABLE OF CONTENTS

		PAGE
	HOW TO USE THIS MANUAL	iv
CHAPTER 1	GENERAL INFORMATION	1-1
Section I	Introduction	1-1
Section II	Standards and Practices	1-5
Section III	Responsibilities and Tasks	1-7
CHAPTER 2	ASSESSING BATTLEFIELD DAMAGE	2-1
Section I	Introduction	2-1
Section II	General Fault Assessment Tables	2-4
CHAPTER 3	ENGINE SYSTEMS	3-1
Section I	Introduction	3-1
Section II	Fault Assessment Tables and Procedures	3-14
Section III	Repair Procedures	3-31
Section IV	Detailed Assessment and Repair Procedures Indexes	3-86

FIGURE 5. Example - reporting of errors/table of contents

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXXX-XXX-80

Table 2-1. Vehicle/System Assessment.

ITEM/ACTION	FAULT ISOLATION	BDAR REFERENCE

NOTE

Items checked in this procedure must work to provide minimum functional combat capability. Even if all systems work the vehicle may be unsafe and may not satisfy normal required operating capabilities or may not receive mission-essential maintenance.

A. MOBILITY ASSESSMENT.

1. VISUALLY INSPECT....

a. TRACK AND SUSPENSION:
Inspect → Damage visible:
- Evaluate extent of damage using procdures in.....CHAPTER 10.
- Determine if.....

No damage visible

Damage can be repaired
- Note repair requirements

Damage cannot be repaired
- Note extent of damage

Continue assessments

RECOVER

b. DRIVER CONTROLS:
Inspect → Damage visible:
- Evaluate extent of damage using procedures in..... CHAPTERS 7, 8, and 9
- Determine if.....

No damage visible

Damage can be repaired
- Note repair requirements

Damage cannot be repaired
- Note extent of damage

Continue assessments

RECOVER

FIGURE 6. Example - assessment flow chart diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXX-XXX-BD

2-10. How to use fault assessment tables.

a. A fault assessment table is organized so the user can quickly assess a particular system or capability by asking a series of questions.

b. First, ask a question. Your only reply will be either a "yes" or "no." If it is "yes", then you have no problem so go to the next question.

c. If it is "no", then proceed to the page listed.

Table 2-1. Mobility

Does engine start/run?	If no, go to table 3-1, page 3-14.
Does tank move in "D" and "R"?	If no, go to table 4-1, page 4-6.
Are the track and suspension intact?	If no, go to Chapter 7.
Does tank steer/pivot?	If no, go to table 4-1, page 4-6.
Does tank brake?	If no, go to table 4-1, page 4-6.
Does tank have full power?	If no, go to table 3-1, page 3-14.

FIGURE 7. Example - assessment table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

5-3. Repair Procedure Index.

Para

Fuel Tank Leaks.....5-5
Bladder Cell Leakage.....5-6
Fuel Tank Substitute.....5-7
Fuel Pump, In-tank Interchangability.....5-9
Fuel Pump, Mechanical Failure.....5-10
Seals, Fuel System, Leak.....5-12
Fittings Leaking.....5-13
Fuel Line (Low Pressure Rupture).....5-14
Fuel Injector Line, Rupture.....5-15
Fuel Filter Clogged or Frozen.....5-17

FIGURE 8. Example - repair procedure index.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXX-XXX-BD

APPENDIX A

REFERENCES

Publication Number	Title
TM 9-1430-510-12/1 C1 through C5	Check Procedures for Radar Set AN/MPQ-37
TM 9-1430-510-12-12/2 C1 through C6	Functional and Theory Schematics for Radar Set AN/MPQ-37
TM 9-1430-510-12/8 C1 through C8	Radar Set AN/MPQ-37
TM 9-1430-510-20 C1 through C5	Schematics for Radar Set AN/MPQ-37
TM 9-1430-510-34/1 C1 through C6	Units of Radar Set AN/MPQ-37 Tested at CW/Pulse Console
TM 9-1430-510-84/2 C1 and C3	Radar Set AN/MPQ-37


FIGURE 9. Example - appendix A, references.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXX-XXX-BD

FABRICATED TOOLS - CONT

Item Number	Description
7	Voltmeter, 18-30Vdc, 5Vdc or less

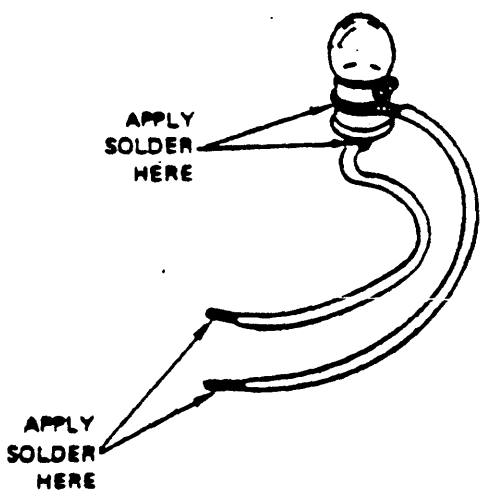

Material list

1. 1 bulb
2. Wire, length as required
3. Solder

Fabrication/Test Procedure:

1. Solder a wire to the center terminal and another wire to the case of a bulb. (Voltage rating of bulb should be close to the expected value being measured) 18-30 volt bulbs from the driver's instrument panel can be used. 5 volt bulbs from a 2-battery flashlight can be used. See figure

2. Test voltage by touching soldered wire ends to voltage source. (Polarity need not be observed - even AC voltage can be tested).

FIGURE 10. Example - appendix B, special fabricated tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM 9-XXXX-XXX-BD

APPENDIX C

EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST

SECTION I. INTRODUCTION

C-1. SCOPE

This appendix equipment/system lists expendable supplies and materials you will need to make BDAR fixes on the (enter name). Items are listeed alphabetically by the item name shown in the Description column. These items are authorized to you by CTA 50-970, Expendable/Durable Items (Except Medical, Class V, Repair Parts, and Heraldic Items) or CTA 8-100.

C-2. EXPLANATION OF COLUMNS (SECTION II)

a. Column(1)-Item number. This number is assigned to the entry in the listing and is referenced in the narrative instructions to identify the material (e.g., "Use cleaning compound, item 5, App. D").

b. Column (3)-National Stock Number. This is the National stock number assigned to the item; use it to request or requisition the item.

c. Column(4)-Description. Indicates the Federal item name and, if required, a description to identify the item. The last line for each item indicates the Commercial and Government Entity Code (CAGEC) in parentheses followed by the part number.

d. Column(5)-Unit of Issue(U/I). Is the abbreviation of the types of units under which material is issued.

C-1

FIGURE 11. Example - appendix C, expendable/durable supplies and materials, section I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

TM 9-XXXX-XXX-BD

APPENDIX C

SECTION II EXPENDABLE/DURABLE SUPPLIES AND MATERIALS

ITEM NUMBER	NSN	DESCRIPTION	U/I
1	5330-00-233-5845	Gasket, material, 1/64 in. (w.o.g. resistant) (81348) HHP96	sh
2	5330-00-467-3615	Gasket, material, 1/32 in. (w.o.g. resistant) (81348) HHP96 TYPE 1	sh
3	4720-00-623-9178	Hose, non-metallic, 1/4 in. ID (81889) 5TS	ft
4	4720-00-169-5112	Hose, non-metallic, 1/2 in. ID (96906) MS39262-8A	ft
5	4720-00-288-9873	Hose, non-metallic, 3/4 in. ID (81349) MIL-H-24135	ft
6	8010-00-515-2487	Lacquer, insulating, electrical (58536) A-A-665	pt
7	5310-00-297-3751	Nut Assortment (81348) FFN836	at
8	5330-00-966-8657	Packing Assortment (O-rings) (73160) OK311	ea

C-2

FIGURE 12. Example - appendix C, expendable/durable supplies and materials, section II.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXXX-XXX-BD

Table D-1

Part I: Substitute Fuels for Diesel Fuel VV-F-800, DF-1, and NATO F-S4

Primary Fuel	Alternate Fuel	Remarks
Diesel Fuel: VV-F-800 (DF-1), NATO-F-54	See Below *Automotive Diesel: ASTM-D-975 (1-D and 2-D) Kerosene: ASTM-D-3699 Fuel Oil: ASTM-D-396 (Number 1 and number 2) Distillate: NATO-F-75 (Low pour point) Kerosene: NATO-F-5B Aviation Turbine: MIL-T-5624 (JP4 and JP-5) NATO-F-40 NATO-F-44	

FIGURE 13. Example-appendix D, substitute materials/parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TM X-XXXX-XXX-BD

APPENDIX E

BDAR FIXES AUTHORIZED FOR TRAINING

BDAR TRAINING FIXES SHALL BE
USED ONLY AT THE DISCRETION OF THE COMMANDER
DAMAGES SHALL BE REPAIRED BY STANDARD MAINTENANCE
PROCEDURES AS SOON AS PRACTICABLE

REPAIR PROCEDURE	PARAGRAPH NO.
POWER GENERATOR AND DISTRIBUTION	
Battery Failure	3.4
Fuel Cell Leakage	3.5
Fan Inoperative	3.7
Stuck Valve	3.8
ERECTION/RETRACTION SYSTEM	
Ball Nut Freeze	4.4
Limit Switch Failure	4.6
Uplock Switch Failure	4.7
MECHANICAL ELEMENTS	
Steering Linkage Damage	5.7

FIGURE 14. Example - appendix E, BDAR fixes authorized for training.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

CONTENT/FORMAT SELECTION SUMMARY

FOR

BATTLEFIELD DAMAGE ASSESSMENT AND REPAIR (BDAR) TECHNICAL MANUALS

10. SCOPE

10.1 Scope. This appendix is to be used to specify which optional requirements are to be contractually imposed in the acquisition of BDAR TM(s) for the equipment/system and contract identified on the reverse side of this sheet. This appendix is a mandatory part of this specification and is applicable (intended for compliance) when the Content/Format Selection Summary List is completed by the Government.

10.2 Application. This appendix is intended to be copied/reproduced, completed, used for contract solicitation, and become part of the contract.

10.3 Tailoring. The contracting activity should evaluate the individual requirements of this specification to determine the extent to which they are most suitable for the acquisition and modify the requirements to ensure that each achieves an optimal balance between operational needs and cost. Exclusion of sections, paragraphs, or sentences shall be indicated on the Content/Format Selection Summary List. When necessary, remarks should be expanded and included on a separate sheet of paper attached to the Summary List. In all cases, tailoring shall be compatible with this specification.

10.4 Limitation. When more than one BDAR TM is required on a contract, a separate Content/Format Selection Summary List shall be completed for each TM. This appendix is applicable to BDAR TM's only.

20. APPLICABLE DOCUMENTS. This section is not applicable to this appendix.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

CONTENT/FORMAT SELECTION SUMMARY LIST - BDAR TM

Equipment name/nomenclature _____

Contract/order No. _____

Paragraph Number	Optional Requirement	Option Selected	Remarks
3.3.4	Foldouts		
3.10	References		
3.11	Content		
3.11.4	Chapter 3 General Repair		
3.11.5	Chapter 4 thru ( )		
3.12	Glossary		

The content/format requirements identified with an "X" in the Option Selected or Remarks column above are herewith established as mandatory requirements of MIL-M-63003A(TM) and are binding on this contract.

Authorized Signature _____ Date _____

Representatives Title _____

Activity _____

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

INDEX

	Paragraph
ABBREVIATIONS	3.9
ACQUISITION REQUIREMNENTS	6.2.1
ACRONYMS	3.9
ASSESSING BATTLEFIELD DAMAGE	3.11c, 3.11.3
ASSESSMENT PROCEDURES	3.11.5.1
ASSESSMENT TABLE	3.11.3.2
AUXILIARY EQUIPMENT	3.11.6
BDAR CHARACTERISTICS	3.11.2.3a
BDAR FIX STATEMENT	3.11.2.1
BDAR TRAINING PROCEDURES	1.3.2, 3.11.7.5
CHAPTERS	3.2.1
CONTENT	3.11
COVER/TITLE PAGE	3.11.1.1
DATA REQUIREMENTS	6.2.2
DEFINITIONS	6.3
DIVISIONS	3.2.1
END ITEM	3.11.1.1i
END ITEM LINE DRAWING	3.11.1.1i
EQUIPMENT INPROVEMENT RECOMMENDATIONS	3.11.2.2e
EXPENDABLE/DURABLE SUPPLIES	3.11.7.3
FABRICATED TOOLS	3.11.7.2
FIX PROCEDURES	1.3.1
FOLDOUTS	3.3.4
FORMAT	3.2
FRONT MATTER	3.11a
GENERAL INFORMATION	3.11b, 3.11.2
GENERAL REPAIR	3.11.4
GLOSSARY	3.11h, 3.12
HALFTONES	3.3.1
HOW TO USE THIS MANUAL	3.11.1.4
ILLUSTRATIONS	3.3
INDEX	3.2.1.3
FRONT COVER	3.11.1.1g
REPAIR PROCEDURE	3.11.4.1c
INTERMEDIATE MAINTENANCE	1.3.3b
INTRODUCTION	3.11.2.2, 3.11.3.1, 3.11.4.1, 3.11.5.1
LEGENDS	3.3.3
LIMITATIONS	3.11.4.2b(1)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

	Paragraph
MAINTENANCE LEVEL	1.3.3
MATERIALS/TOOLS	3.11.4.2b(3)
NOMENCLATURE	3.8
NOTES	3.5
OPERATING CHARACTERISTICS	3.11.2.3c
OPERATIONAL PROCEDURES	3.7
ORDERING DATA	6.2
PARAGRAPHS	3.2.1.2
PERSONNEL/TIME REQUIRED	3.11.4.2b(2)
PROCEDURAL STEPS	3.6
PUBLICATION DATE	3.11.1.1h
QUALITY ASSURANCE PROVISIONS	4
QUALITY DEFICIENCY REPORT	3.11.2.2e
REFERENCES	3.10
REFERENCES, APPENDIX	3.11.7.1
REPAIR PROCEDURES	3.6
REPAIR PROCEDURE INDEX	3.11.4c, 3.11.5.1c
REPORTING ERRORS	3.11.1.3
RESPONSIBILITIES AND TASKS	3.11.2.4
SECTIONS	3.2.1.2
SPECIAL TOOLS	3.11.7.2
STANDARDS AND PRACTICES	3.11.2.3
STYLE	3.1
SUBSTITUTE MATERIAL/PARTS	3.11.7.4
SYMBOLS	3.3.2
TABLES	3.4
TABLE OF CONTENTS	3.11.1.3
TASKS AND RESPONSIBILITIES	3.11.2.4
TERMINOLOGY	3.8
TITLE PAGE/COVER	3.11.1.1
TRAINING FIXES	3.11.2.3d
UNIT MAINTENANCE	1.3.3a
VALIDATION	4.1
VALIDATION RECORD	4.2
VERIFICATION	4.3
VOLUMES	3.2.1.1
WAIVER OF PRECAUTIONS	3.11.2.3b
WARNINGS, CAUTIONS, NOTES	3.5
WARNING PAGE	3.11.1.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - TM

Review activities:
Army - AL, AR, AT, AL, MI, TE

User activities:
Army - CR, CU

Preparing activity:
Army - TM

(Project No. TMSS A236)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USAMC Materiel Readiness Support Activity
ATTN: AMXMD-MP
Lexington, KY 40511-5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-63003A(TM)	TECHNICAL MANUALS: BATTLEFIELD DAMAGE ASSESSMENT AND REPAIR, PREPARATION OF

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.