[INCH - POUND]

PPP-C-58B
January 13, 1992
SUPERSEDING
PPP-C-58A
August 20, 1973

FEDERAL SPECIFICATION

CAN, TELESCOPE TOP

The General Services Administration has authorized the use of this specification by all federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for cylindrical, paperboard, liquid-tight containers, with reinforced set-in bottom and outside fitting cover (see figure I).

1.2 Classification. Cans in accordance with this specification shall be of the following types and sizes as specified (see 6.2).

Type I - Plain (unlined)
  Size A - 16 ounce
  Size B - 1 quart

Type II - Lined
  Size B - 1 quart
  Size C - 2 quart
  size D - 4 quart.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-636 - Box, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

DISTRIBUTION STATEMENT A : Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington DC, 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Laws and Regulations

21 CFR 174 - Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder

Public Law 94-580, Resource Conservation and Recovery Act, is part of U.S. Code, Title 42.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal Agency responsible for the issuance thereof.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois. 60606.)

3. REQUIREMENTS

3.1 Material. The material used for constructing paper cans furnished under this specification shall conform to the applicable requirements specified hereinafter, and shall be free from any defects which may impair serviceability or proper functioning under service conditions. All material shall conform with the Federal Food, Drug and Cosmetic Act as amended and Regulations Promulgated Thereunder. Supplier must submit evidence of compliance to that effect.

3.1.1 Adhesive. The adhesive used for bonding shall be of a suitable type, free from objectionable odor.

3.1.2 Paperboard. The paperboard used for constructing cans shall be heavy white sulfate board. The material shall be able to take the adhesive without penetration through the sheet.

3.1.3 Covers. The covers shall be manufactured from stock of the same material as the body. The material shall withstand forming into covers without cracking and shall be able to retain shape of cover after drying. Fit shall be sufficiently tight so that cover will not fall off by its own weight when empty container is held in an inverted position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3.1.4 Thickness of paperboard.. The wall thickness of the body and cover, shall be not less than 0.026 inch and the cover disc not less than 0.017 inch or as specified in contract or order (see 6.2).

3.1.5 Type II only. Liners used shall not exhibit any reaction with the contents. Moisture and grease-resistant and anti-corrosive liners, such as parchment, plastic coated glassine, aluminum foil, duplex kraft, cellulose acetate, polyethylene and others are available commercially and may be specified in contract or order (see 6.2).

3.1.6 Recovered materials. The manufacturer shall utilize recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

3.2 Fabrication.

3.2.1 Body. All types of tubes shall either be spirally or convolutely wound and shall be constructed of materials as specified under 3.1.

3.2.2 Butt joints. All plies of spirally wound tubes shall be wound with butt joints whose maximum gap shall not exceed 1/16 inch.

3.2.3 Seams. The seams on convolutely wound tubes shall be tapered or beveled so as to form a smooth seam.

3.2.4 Inside diameter. Tolerance on inside diameter shall be plus or minus 1/32 of an inch.

3.2.5 Inside length. Tolerance on inside length shall be plus 3/8 inch, minus 0 inch.

3.3 Design and construction. Design and construction of all types of cans and their closures shall conform to figure 1 which shall form a part of this specification.

3.4 Workmanship. All containers shall be manufactured in accordance with best commercial practice. The finished article shall be clean, free of foreign matter, and free from any defects which may affect the appearance or serviceability, such as surface scuffing, inadequate adhesion between plies, ragged joints or burrs on inside edge and other defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

4. Quality Assurance

Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth herein, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

Each lot of cans shall be inspected for conformance to the requirements herein. Inspection shall be in accordance with MIL-STD-105 using the sampling plans specified below.

4.1 Visual characteristics - Inspection level S-4 with an Acceptable Quality level (AQL) of 4.0 percent defective. The sample unit shall be a single can.

4.2 Dimensional characteristics - Inspection level S-2 with an Acceptable Quality level (AQL) of 4.0 percent defective. The sample unit shall be one can.

4.3 Preservation, Packaging, Packing, Labeling and Marking - Inspection level S-2 with an AQL of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

5. PACKAGING

5.1 Preservation. Assembled cans with telescope top in place shall be packed as specified in paragraph 5.2.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A. Cans of like description in quantities as specified in table I shall be packed in a box conforming to PPP-B-636, class-weather resistant. The box shall be closed, waterproof sealed and strapped in accordance with the appendix to the box specification. The gross weight shall not exceed the weight limitations of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Cans of like description in quantities as specified in table I shall be packed in a box conforming to PPP-B-636, class-domestic. The box shall be closed in accordance with the appendix to the box specification.

TABLE I. Packing Quantities

Size	Quantity per container
16-oz. unlined	200
1-qt. unlined	100
1-qt. lined	100
2-qt. lined	50
4-qt. lined	50

5.2.3 Level C. Cans in quantities as specified (see 6.2), shall be packed in containers to assure carrier acceptance and safe arrival at destination in compliance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Cans conforming to this specification are suitable for use as containers for handling foods and liquids.

6.2 Ordering data. Procurement documents shall specify the following:


(a) Title, number and date of this specification.
(b) Quantity required.
(c) Any other sizes not specified.
(d) Type and size (see 1.2).
(e) Level of preservation and packing (see 5.1):
(f) Thickness of Paperboard (see 3.1.4).
(g) Type of liner required (see 3.1.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

6.3 Item Identifiers/Reference Part Number System (for cataloging use only)

Part Reference Numbers:
PPPC58-1A This example describes a can, plain, 16 oz capacity

```
        ||
        ||
        ||----- Size - A - 16 oz
        |               B - 1 quart
        |               C - 2 quart
        |               D - 4 quart
        |
        |-------Type - 1 - plain
                       2 - lined
```

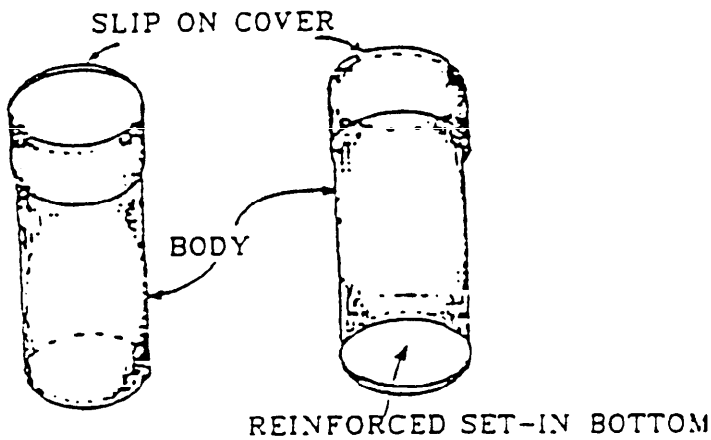

CAN, TELESCOPE TOP

FIGURE 1

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 69

Civil Agency Coordinating Activities:

GSA-FSS
USDA-AFS

Review Activities

DLA - GS
Air Force - 82

Preparing Activity

GSA-FSS

Ccordinating Activity

Army - GL

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.