FED. SUP CLASS
5305

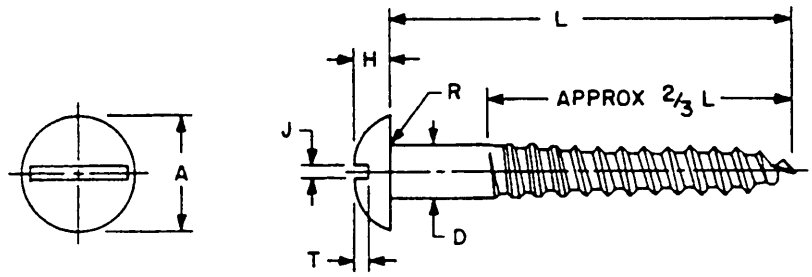


TABLE I

NOMINAL SIZE		2	3*	4	5*	6	7*	8	9*	10	12	14	16	18
D SCREW DIA	BASIC	.086	.099	.112	.125	.138	.151	.164	.177	.190	.216	.242	.268	.294
	MAX	.090	.103	.116	.129	.142	.155	.168	.181	.194	.220	.246	.272	.298
	MIN	.079	.092	.105	.118	.131	.144	.157	.170	.183	.209	.235	.261	.287
A HEAD DIA	MAX	.162	.187	.211	.236	.260	.285	.309	.334	.359	.408	.457	.506	.555
	MIN	.146	.169	.193	.217	.240	.264	.287	.311	.334	.382	.429	.476	.523
H_s HEAD HEIGHT	MAX	.069	.078	.086	.095	.103	.111	.120	.128	.137	.153	.170	.187	.204
	MIN	.059	.067	.075	.083	.091	.099	.107	.115	.123	.139	.155	.171	.187
J SLOT WIDTH	MAX	.031	.035	.039	.043	.048	.048	.054	.054	.060	.067	.075	.075	.084
	MIN	.023	.027	.031	.035	.039	.039	.045	.045	.050	.056	.064	.064	.072
T SLOT DEPTH	MAX	.048	.053	.058	.063	.068	.072	.077	.082	.087	.096	.106	.115	.125
	MIN	.037	.040	.044	.047	.051	.055	.058	.062	.065	.073	.080	.087	.094
R FILLET RADIUS	MAX	.02	.02	.02	.03	.03	.03	.03	.03	.03	.03	.05	.05	.05
THREADS PER INCH		26	24	22	20	18	16	15	14	13	11	10	9	8

NOTES:

(D) * Inactive, see sheet 2.

1. MATERIAL: Carbon steel, 1010 thru 1022 or 1108 thru 1118 in accordance with QQ-S-631, QQ-S-634, QQ-S-637 or QQ-W-405.
(D) Brass, alloy no. 260 or 268, quarter-hard in accordance with QQ-B-613 or QQ-B-626; or alloy no. 260 or 270, quarter-hard in accordance with QQ-W-321.

2. PROTECTIVE COATING: Steel - Cadmium plated in accordance with QQ-P-416, Type II, Class 3 or MIL-C-81562, Type II, Class 3; or zinc coated in accordance with QQ-Z-325,
(D) Type II, Class 3 or MIL-C-81562, Type II, Class 3.
Brass - Plain, uncoated.

3. THREADS: Maximum permissible variation in number of threads per inch shall be plus or minus 10 percent.

5. DIMENSIONS: All dimensions are in inches.

6. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS35495-1.

7. Referenced documents shall be of the issue in effect on date of invitations for bid.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(D) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

APPROVED 4 DEC 1956 REVISED (A) 18 OCT 1966 (B) 1 JUN 1967 (C) 20 MAY 1968 (D) 15 AUG 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC
Other Cust YD
82

TITLE
SCREW, WOOD, ROUND HEAD, SLOTTED, STEEL AND BRASS

MILITARY STANDARD
MS 35495

PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE II

STEEL, CADMIUM OR ZINC PLATED

NOMINAL SIZE		2	3	4	5	6	7	8	9	10	12	14	16	18
L LENGTH	TOL.	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.25 .38 .50 .62	+.00 -.03	1 2 3 4		9 10 11 12	22 23 24	34 35 36	49 50 51	63 64 65	77 78	92 93	108			
.75 .88 1.00 1.25 1.50	+.00 -.05	5	7	13 14 15 16 17	25 26 27 28 29	37 38 39 40 41	52 53 54 55 56	66 67 68 69 70	79 80 81 82 83	94 95 96 97 98	109 110 111 112 113	124 125 126 127 128	141 142 143	157 158
1.75 2.00 2.25 2.50 2.75	+.00 -.06					42 43 44 45	57 58 59 60	71 72 73 74 75	84 85 86 87 88	99 100 101 102 103	114 115 116 117 118	129 130 131 132 133	144 145 146 147 148	159 160 161 162 163
3.00 3.50 4.00 4.50 5.00	+.00 -.09							76	89	104 105	119 120 121	134 135 136 137 138	149 150 151 152 153	164 165 166

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

TABLE III

BRASS, PLAIN, UNCOATED

NOMINAL SIZE		2	3	4	5	6	7	8	9	10	12	14	16
L LENGTH	TOL.	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.25 .38 .50 .62	+.00 -.03	201 202 203 204	902 903 904	209 210 211 212	219 220 221	229 230 231		248 249	259	268			
.75 .88 1.00 1.25 1.50	+.00 -.05	205	905	213 214 215	222 223 224	232 233 234 235 236	240 241 242 243 244	250 251 252 253 254	260 261 262 263 264	269 270 271 272 273	281 282 283 284 285	295 296 297	
1.75 2.00 2.25 2.50	+.00 -.06							255 256		274 275 276 277	286 287 288 289	298 299 301	308 310
3.00 3.50	+.00 -.09										291 292	303	312

* NOTE: (D) Crossed-out dash numbers (sizes 3, 5, 7 and 9) are INACTIVE FOR NEW DESIGN AFTER 15 August 1974.

INTERCHANGEABILITY

Steel, cadmium plated screws covered by dash numbers 501 thru 666 given in revision A of this standard are canceled after 1 June 1967. Brass, black oxide coated screws covered by dash numbers 701 thru 812 given in revision B of this standard and screws covered on AN545 in part are canceled after 20 May 1968. The canceled screws should be used for maintenance purposes until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with Table IV (see sheet 3).

APPROVED 4 DEC 1956 REVISED (C) 20 MAY 1968 (D) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust YD 82	TITLE SCREW, WOOD, ROUND HEAD, SLOTTED, STEEL AND BRASS	MILITARY STANDARD MS 35495	
PROCUREMENT SPECIFICATION FF-S-111	SUPERSEDES: AN545 in part and BCRX series	SHEET 2 OF 3	

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE IV - INTERCHANGEABILITY

PART NUMBER	
CANCELED	SUPSD BY
MS35495	MS35495
501	1
502	2
503	3
504	4
505	5
509	9
510	10
511	11
512	12
513	13
514	14
515	15
516	16
517	17
522	22
523	23
524	24
525	25
526	26
527	27
528	28
529	29
534	34
535	35
536	36
537	37
538	38
539	39
540	40
541	41
542	42
543	43
544	44
545	45
549	49
550	50
551	51
552	52
553	53
554	54
555	55
556	56
557	57
558	58
559	59
560	60
563	63
564	64
565	65
566	66
567	67
568	68
569	69
570	70
571	71
572	72
573	73
574	74
577	77
578	78
579	79
580	80
581	81
582	82
583	83
584	84
585	85
586	86
587	87
589	89
592	92
593	93
594	94

PART NUMBER	
CANCELED	SUPSD BY
MS35495	MS35495
595	95
596	96
597	97
598	98
599	99
600	100
601	101
602	102
604	104
605	105
608	108
609	109
610	110
611	111
612	112
613	113
614	114
615	115
616	116
617	117
619	119
620	120
621	121
625	125
626	126
627	127
628	128
629	129
630	130
631	131
632	132
634	134
635	135
636	136
641	141
642	142
643	143
644	144
645	145
646	146
647	147
649	149
650	150
651	151
657	157
658	158
659	159
660	160
661	161
662	162
664	164
665	165
666	166
701	201
702	202
703	203
704	204
705	205
709	209
710	210
711	211
712	212
713	213
714	214
715	215
719	219
720	220
721	221
722	222
723	223
724	224
729	229
730	230

PART NUMBER	
CANCELED	SUPSD BY
MS35495	MS35495
731	231
732	232
733	233
734	234
735	235
736	236
740	240
741	241
742	242
743	243
744	244
748	248
749	249
750	250
751	251
752	252
753	253
754	254
755	255
756	256
759	259
760	260
761	261
762	262
763	263
764	264
768	268
769	269
770	270
771	271
772	272
773	273
774	274
775	275
777	277
781	281
782	282
783	283
784	284
785	285
786	286
787	287
789	289
791	291
795	295
796	296
797	297
798	298
799	299
801	301
803	303
808	308
810	310
812	312

AN545	MS35495
2-2	1
2-3	2
2-4	3
2-5	4
2-6	5
3-6	7
4-2	9
4-3	10
4-4	11
4-5	12
4-6	13
4-7	14
4-8	15

PART NUMBER	
CANCELED	SUPSD BY
AN545	MS35495
4-10	16
4-12	17
6-3	34
6-4	35
6-5	36
6-6	37
6-7	38
6-8	39
6-10	40
6-12	41
6-14	42
6-16	43
6-18	44
6-20	45
8-3	63
8-4	64
8-5	65
8-6	66
8-7	67
8-8	68
8-10	69
8-12	70
8-14	71
8-16	72
8-18	73
8-20	74
8-22	75
8-24	76
10-4	92
10-5	93
10-6	94
10-7	95
10-8	96
10-10	97
10-12	98
10-14	99
10-16	100
10-18	101
10-20	102
10-22	103
10-24	104
10-28	105
12-5	108
12-6	109
12-7	110
12-8	111
12-10	112
12-12	113
12-14	114
12-16	115
12-18	116
12-20	117
12-22	118
12-24	119
12-28	120
12-32	121
14-6	124
14-7	125
14-8	126
14-10	127
14-12	128
14-14	129
14-16	130
14-18	131
14-20	132
14-22	133
14-24	134
14-28	135
14-32	136
14-36	137
14-40	138
16-8	141

PART NUMBER	
CANCELED	SUPSD BY
AN545	MS35495
16-10	142
16-12	143
16-14	144
16-16	145
16-18	146
16-20	147
16-22	148
16-24	149
16-28	150
16-32	151
16-36	152
16-40	153
B2-2	201
B2-3	202
B2-4	203
B2-5	204
B2-6	205
B3-3	902
B3-4	903
B3-5	904
B3-6	905
B4-2	209
B4-3	210
B4-4	211
B4-5	212
B4-6	213
B4-7	214
B4-8	215
B5-3	219
B5-4	220
B5-5	221
B5-6	222
B5-7	223
B5-8	224
B6-3	229
B6-4	230
B6-5	231
B6-6	232
B6-7	233
B6-8	234
B6-10	235
B6-12	236
B8-4	248
B8-5	249
B8-6	250
B8-7	251
B8-8	252
B8-10	253
B8-12	254
B8-14	255
B8-16	256
B10-5	268
B10-6	269
B10-7	270
B10-8	271
B10-10	272
B10-12	273
B10-14	274
B10-16	275
B10-18	276
B10-20	277
B12-6	281
B12-7	282
B12-8	283
B12-10	284
B12-12	285
B12-14	286
B12-16	287
B12-18	288
B12-20	289
B12-24	291
B12-28	292

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

APPROVED 4 DEC 1956 REVISED (C) 20 MAY 1968 (D) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC
Other Cust YD 82

PROCUREMENT SPECIFICATION FF-S-111

TITLE
SCREW, WOOD, ROUND HEAD, SLOTTED, STEEL AND BRASS

SUPERSEDES: AN545 in part and BCRX series.

MILITARY STANDARD
MS 35495
SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.