FED SUP CLASS
5310

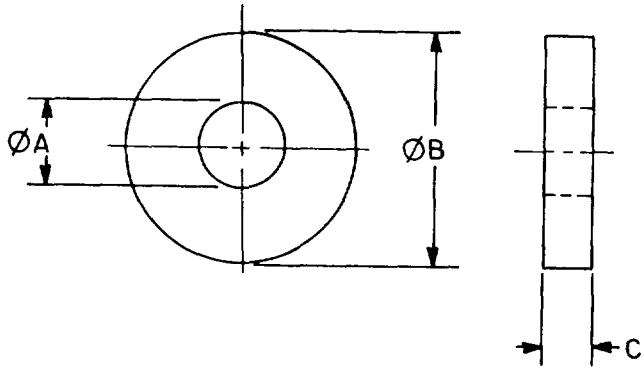


TABLE I. DASH NUMBERS AND DIMENSIONS

SIZE	ØA I.D. MIN	ØA I.D. MAX	ØB O.D. MIN	ØB O.D. MAX	C THICKNESS MIN	C THICKNESS MAX	DASH NUMBER BRASS	DASH NUMBER COPPER
NO. 4	0.256	0.261	0.870	0.880	0.068	0.074	1	13
NO. 5	.223	.228	.808	.864	.061	.067	2	14
NO. 6	.203	.208	.623	.661	.054	.060	3	15
NO. 7	.176	.181	.495	.568	.047	.053	4	16
NO. 8	.165	.170	.495	.505	.038	.044	5	17
NO. 9	.148	.153	.433	.474	.037	.043	6	18
NO. 10	.134	.139	.401	.411	.033	.039	7	19
NO. 11	.128	.133	.370	.396	.027	.033	8	20
NO. 12	.124	.129	.354	.365	.026	.032	9	21
NO. 13	.106	.111	.338	.348	.022	.028	10	22
NO. 14	.093	.098	.307	.320	.018	.024	11	23
NO. 15	.086	.091	.276	.286	.017	.023	12	24

REQUIREMENTS:

1. MATERIAL: COPPER ALLOY (BRASS LEADED) UNS C34000 IN ACCORDANCE WITH ASTM B121, TEMPER H02 (1/2 HARD). COPPER, UNS C10400 IN ACCORDANCE WITH ASTM B152, TEMPER H02 (1/2 HARD) TO H08 (SPRING TEMPER).

2. SURFACE FINISH: BRASS, BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495 COPPER, NATURAL BRIGHT COPPER FINISH.

3. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER.

EXAMPLE: MS51936-1
- DASH NUMBER
- BASIC MS NUMBER

MS51936-1 INDICATES - WASHER, FLAT (BURR) BRASS, INSIDE DIAMETER .256; OUTSIDE DIAMETER .870; THICKNESS .068.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICTATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. THE NUMBERS IN "SIZE" COLUMN ARE COMPATIBLE WITH RIVET SIZES.

USER ACTIVITIES:
ARMY – AT
NAVY – MC

REVIEWER ACTIVITIES:
ARMY-GL, ME, MI
NAVY-SA
DLA-IS

APPROVED 22 APR 63
REVISED (B) 31 DEC 87

(B) ENTIRE STANDARD REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AR Other Cust NAVY-YD		WASHER, FLAT (BURR)	MS51936
PROCUREMENT SPECIFICATION FF-R-556	SUPERSEDES BMAX2.1		PAGE 1 OF 1

STRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
s military standard is approved for use by all Departments and Agencies of the Department of Defense.
ection for all new engineering and design applications and for repetitive use shall be made from this
ument when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.