MIL-T-52806A(ME)
4 March 1980
SUPERSEDING
MIL-T-52806(ME)
24 May 1974

MILITARY SPECIFICATION

TABLE, VEHICULAR-MOUNTED, FLAT TOP, 2 DRAWER

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a flat top, vehicular-mounted table with two drawers.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
AA-F-359	- Filing Cabinets, Steel, Legal and Letter Size, Vertical.
NN-P-530	- Plywood, Flat Panel.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/1283 FSC 6675

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

MMM-A-187	- Adhesive, Epoxy Resin Base Low and Intermediate Strength, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-T-75	- Tape, Preservation and Sealing.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-17171	- Plastic, Laminate, Decorative, High Pressure.

STANDARDS

FEDERAL

FED. STD. No. 595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36 - Structural Steel.
A 109 - Steel, Carbon, Cold-Rolled Sheet, Commercial Quality.
A 519 - Seamless Carbon and Alloy Steel Mechanical Tubing.
A 366 - Steel Sheet, Cold-Rolled, Commercial Quality.
B 209 - Aluminum-Alloy Sheet and Plate.

(Copies may be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The table shall consist of two symmetrical parts as shown in Figure 1 and as specified herein for use with a two-drawer filing cabinet conforming to AA-F-359, Type 1, Size 2.

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

3.2.1 Steel.

3.2.1.1 Sheet. Sheet steel for forming drawers shall be cold-rolled sheet, commercial quality conforming to ASTM A 366, edge and finish as specified (see 6.2).

3.2.1.2 Strip. Strip steel for forming drawer runners shall be cold-rolled carbon steel strip conforming to ASTM A 109, half-hard temper, edge and finish as specified (see 6.2).

3.2.1.3 Tubing. Steel tubing for forming table legs shall conform to ASTM A 519, seamless carbon, condition normalized, square cross section.

3.2.1.4 Angle. Angle steel for forming braces and mounting attachments shall conform to ASTM A 36.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

3.2.2 Aluminum. Aluminum plate for forming table top molding shall conform to ASTM B 209, UNS A1100, Temper 0.

3.2.3 Plywood. Plywood shall conform to NN-P-530, Group B, Interior Type, sanded two sides and shall be 0.75 inch thick.

3.2.4 Plastic. Plastic for table top coverings shall conform to MIL-P-17171, Type I. Color shall be green conforming to FED. STD. No. 595, Color No. 24525.

3.3 Construction.

3.3.1 Joints. Joints shall be welded, bolted, or riveted at the option of the contractor.

3.3.2 Braces. The table legs and top shall be braced by securely fastened angles so as to form a rigid and stable structure.

3.3.3 Table top covering. The plastic table top covering shall be bonded to the plywood surface with adhesive conforming to MMM-A-187.

3.3.4 Molding. The molding around the edge of the table top shall be flush with or slightly below the surface of the plastic covering. The molding shall fit tightly around the perimeter of the table top to prevent seepage of fluids between the covering and the molding.

3.3.5 Drawers. Drawers shall be not less than 24 inches in length, 21 inches in width and 3 inches in height. Minus tolerances of 0.50-inch in length and width, and 0.25-inch in height are permissible. Drawers shall be mounted in slides and shall fit flush under the table top. Slides may be affixed to either the table top or the angle braces. When mounted in the slides and latched, the drawer shall not extend beyond the outer edge of either leg.

3.3.5.1 Drawer locks. Each drawer shall have a key-operated latch fabricated so as to prevent drawer opening during shock and vibration. A single key shall lock and unlock both drawers. Not less than two keys shall be furnished with each table.

3.3.6 Mounting attachments. Mounting attachments shall be angles securely fastened to the underside of the table top and flush with the table end opposite the legs. The side of the angle which will contact the filing cabinet shall be drilled with 0.375 inch holes at three points which are equidistant from the inner top and bottom edges of the angle and spaced equally from front to back. The drawer slide shall not interfere with the mounting holes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

3.4 Treatment and painting. The portions of the table normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A. Color shall be green conforming to FED. STD. No. 595, Color No. 24525.

3.5 Workmanship.

3.5.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the material. Corners shall be square and true. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination.

4.3.2.1 Samples. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 4.0 percent defective for major defects and 10.0 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The table shall be examined as specified herein for the following defects.

Major

101. Table not in accordance with Figure 1.
102. Material not as specified.
103. Drawer locks not as specified.
104. Keys missing or number incorrect.
105. Keys do not lock/unlock both drawers.
106. Construction not as specified.
107. Workmanship not as specified.

Minor

201. Treatment and painting not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:34Z
Check the source to verify that this is the currentversion before use.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials, methods, and containers not as specified. Each incorrect material, method or container shall be considered one defect.
109.	Disassembly not as specified for Level A.
110.	Drawers not secured in the closed position for Level A.
111.	Table top not protected as specified for Level A.
112.	Blocking, bracing, and cushioning not as specified for Level A or Level B.
113.	Closure and strapping of shipping containers not as specified for Level A or Level B.
114.	Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. The table shall be disassembled to the maximum practicable extent in order to effect a reduction in cubage and to protect those parts vulnerable to damage.

5.1.1.2 Preservation. All unprotected ferrous metal hardware such as nuts, bolts, or screws requiring a preservative shall be coated with P-1 preservative in accordance with MIL-P-116. Parts requiring lubrication shall be lubricated with the contractor's recommended lubricant.

5.1.1.3 Fasteners. Any removed fasteners shall be preserved by Method IC-1 or IC-3 of MIL-P-116.

5.1.1.4 Drawers. Drawers shall be secured in the closed position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

5.1.1.5 Table top. The table top shall be completely covered with polyethylene film not less than 1.50 mil thick. The film covering shall conform to L-P-378 and shall be taped to the underside of the top with tape conforming to PPP-T-75.

5.1.2 Commercial. The table shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. The tables shall be packed in boxes conforming to PPP-B-601, Overseas Type, Grade B or PPP-B-621, Class 2. Blocking, bracing, and cushioning of the tables shall be in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the appendix of the applicable box specification.

5.2.2 Level B. The tables shall be packed as specified in 5.2.1 for Level A, except the boxes shall be Domestic Type; or in accordance with PPP-B-636, V2s, V11c or V13c or PPP-B-640, Class 2. Fiberboard boxes shall be waterproof-sealed in accordance with the appendix to the applicable box specification.

5.2.3 Commercial. The table, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. Military marking shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The table is intended, when assembled with the filing cabinet specified in 3.1, for use as a surveyor's work table to be used in the field, mounted in a van.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Edge and finish required on steel sheet and strip (see 3.2.1).
(c) Degree of preservation and degree of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification.


Custodian:
Army - ME

Review acitivity:
DLA - GS

Preparing activity:
Army - ME

Project No. 6675-A225

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

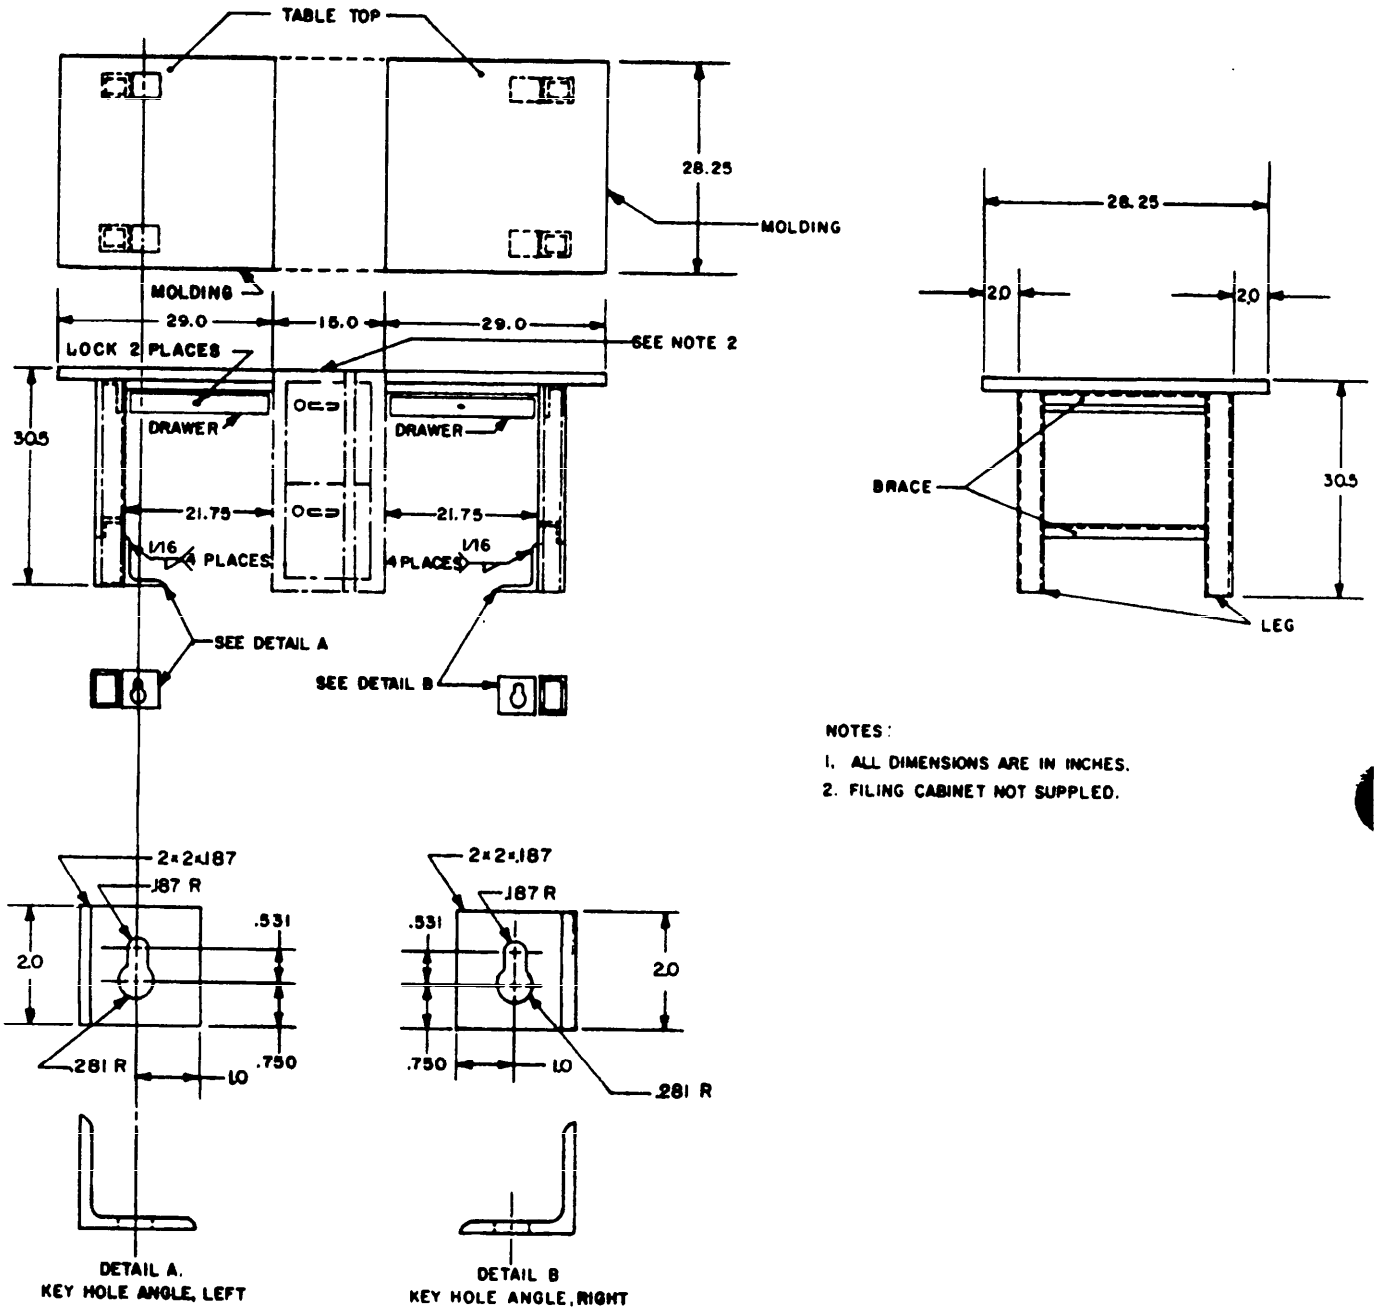

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. FILING CABINET NOT SUPPLED.

FIGURE 1. Table vehicular mounted, flat top, 2 drawer.

X-2692A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-52806A(ME) Table, Vehicular-Mounted, Flat Top, 2 Drawer

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.