MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, MODULES, ELECTRONIC, FEEDBACK TYPE, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the module described herein shall consist of this document and the latest issue of specification MIL-T-81714.



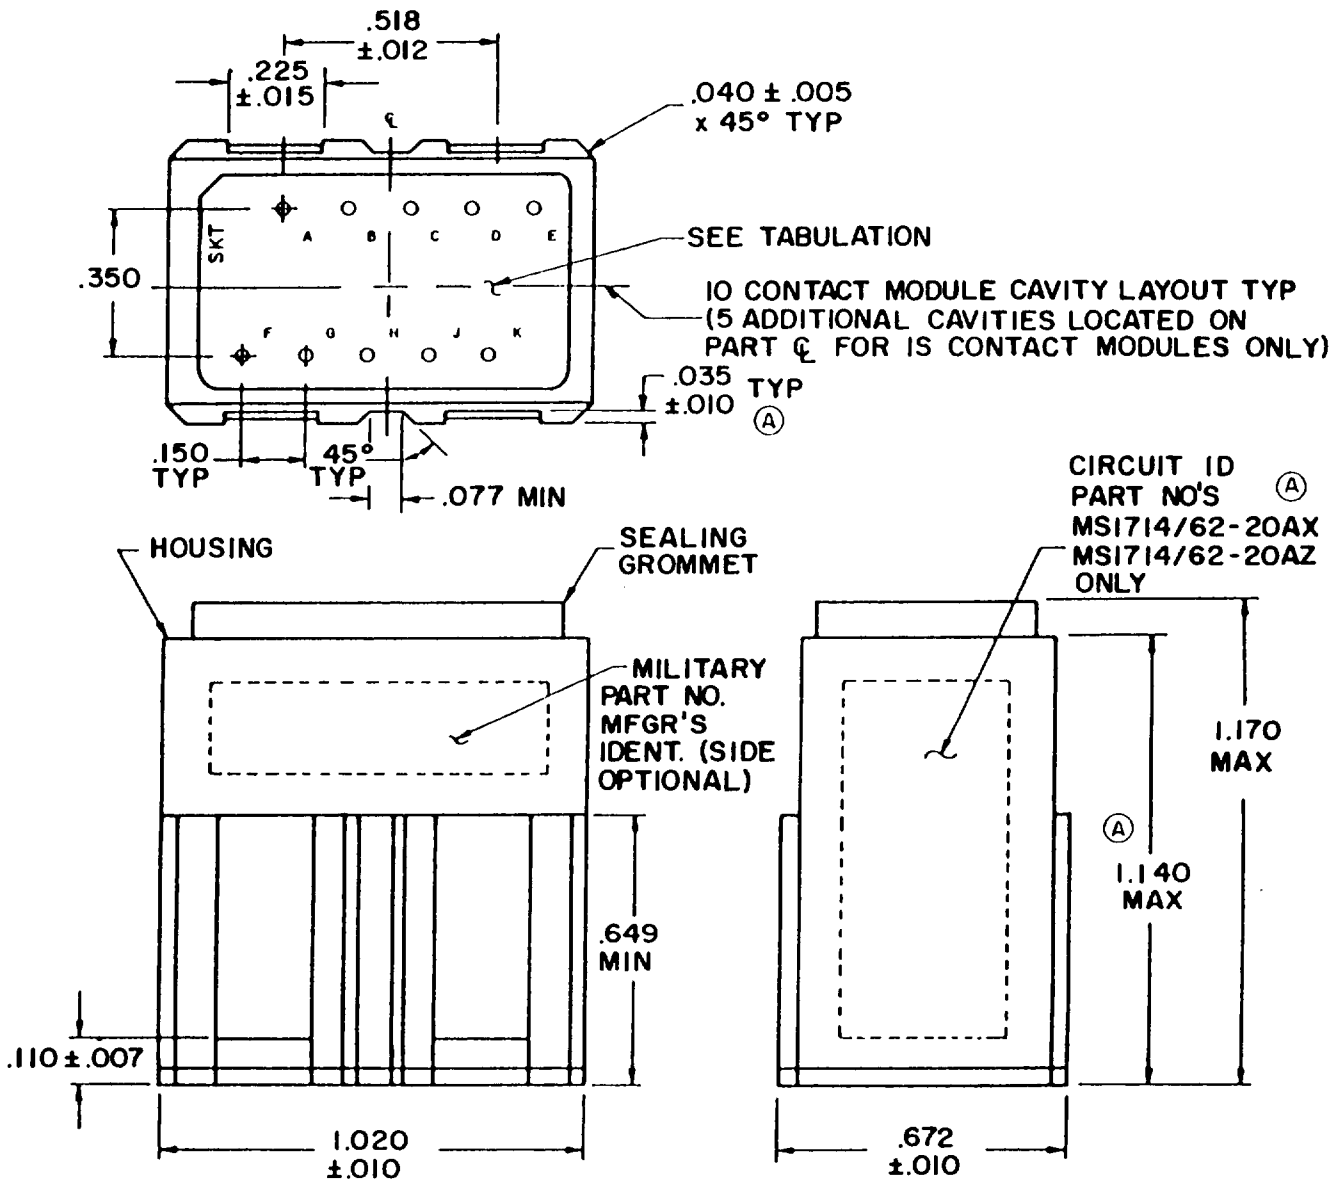


FIGURE 1.


DISTRIBUTION STATEMENT A. Approved for public release; distribution in unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

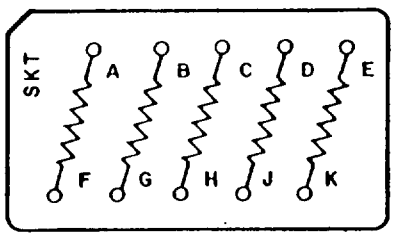


AA

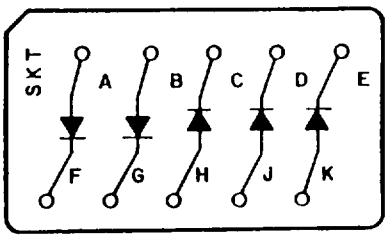


AF

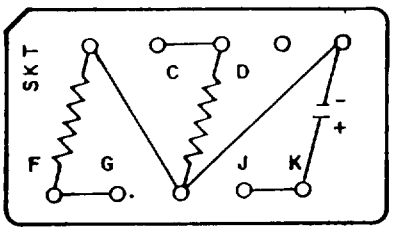


Ⓐ AB

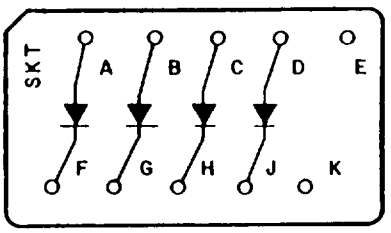


AG

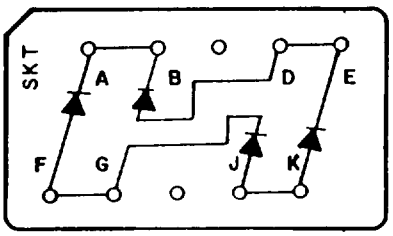


Ⓐ AC

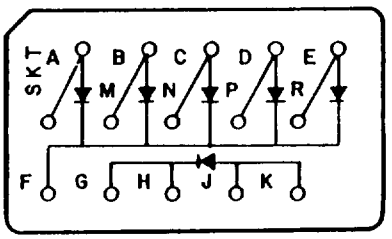


AH

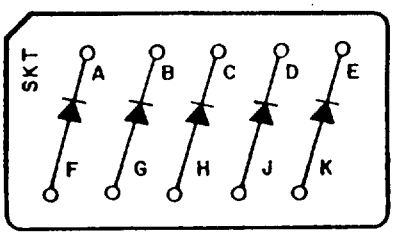


Ⓐ AD

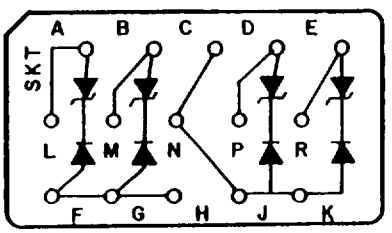

AJ

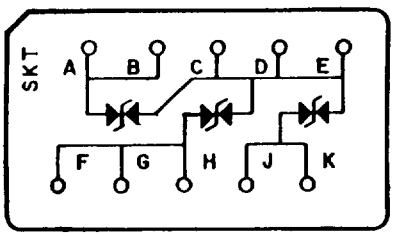

AE

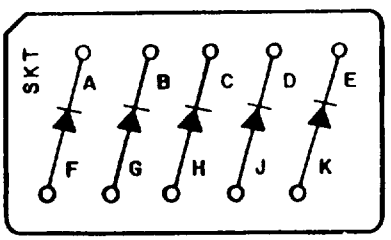

AK

FIGURE 2. Grommet cavity idenntification marking (see part number breakdown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

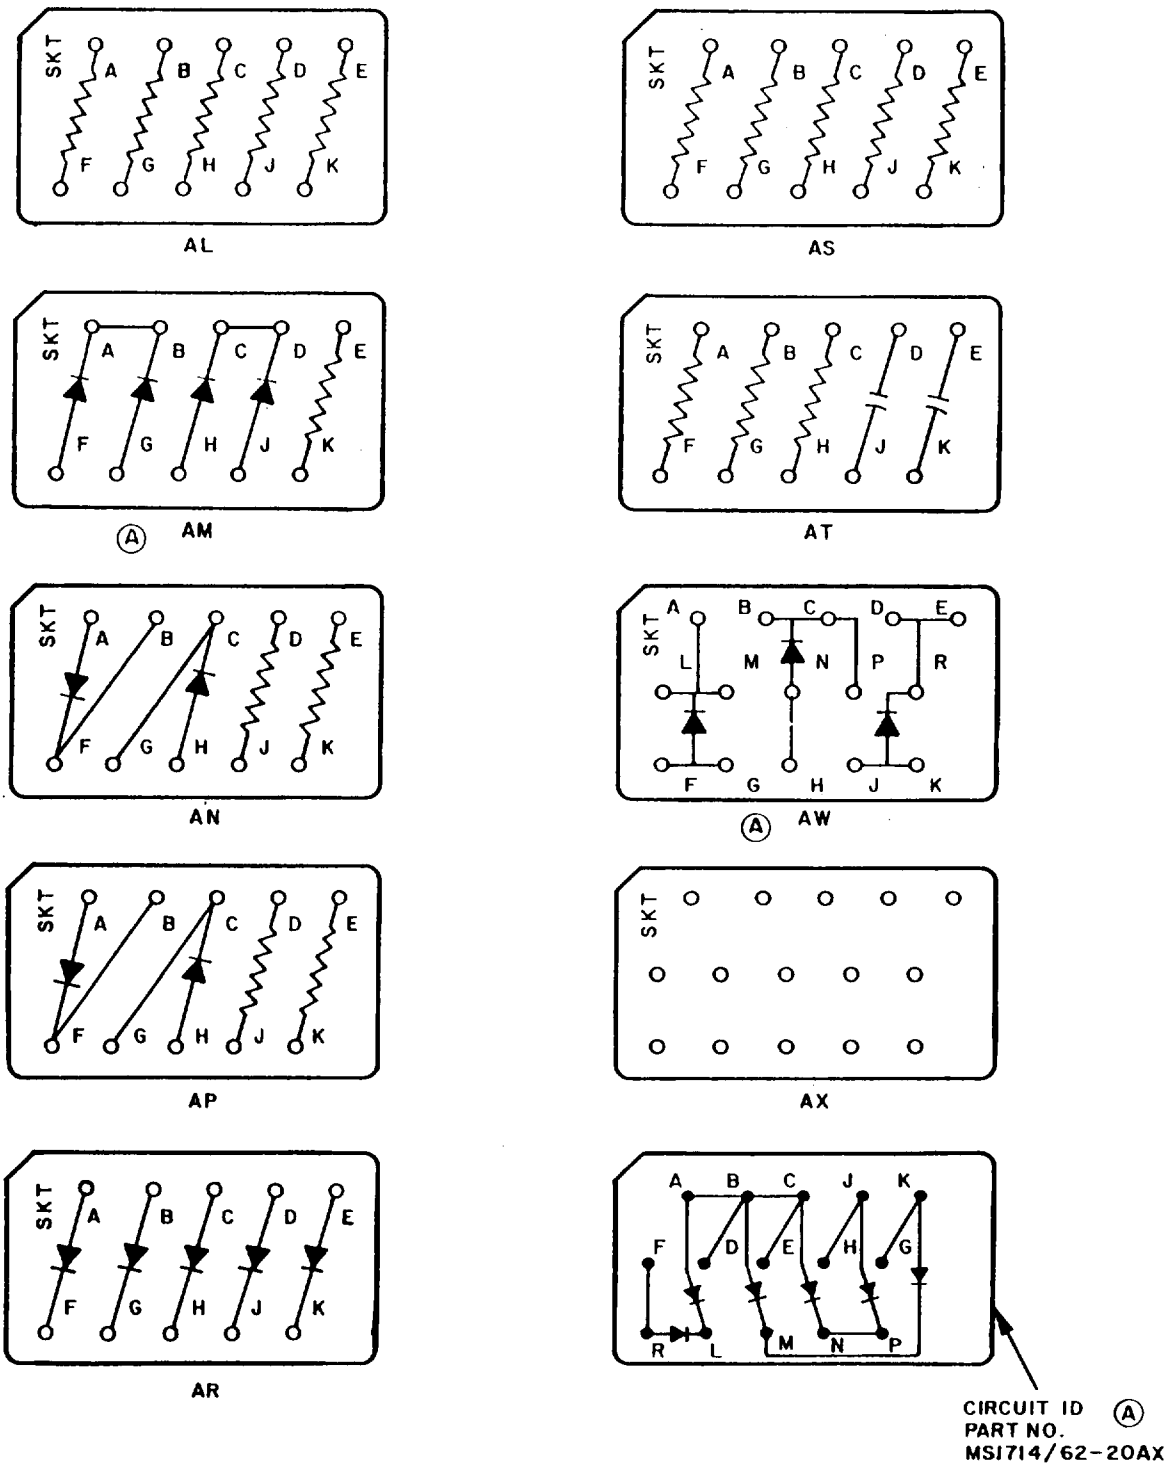


FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

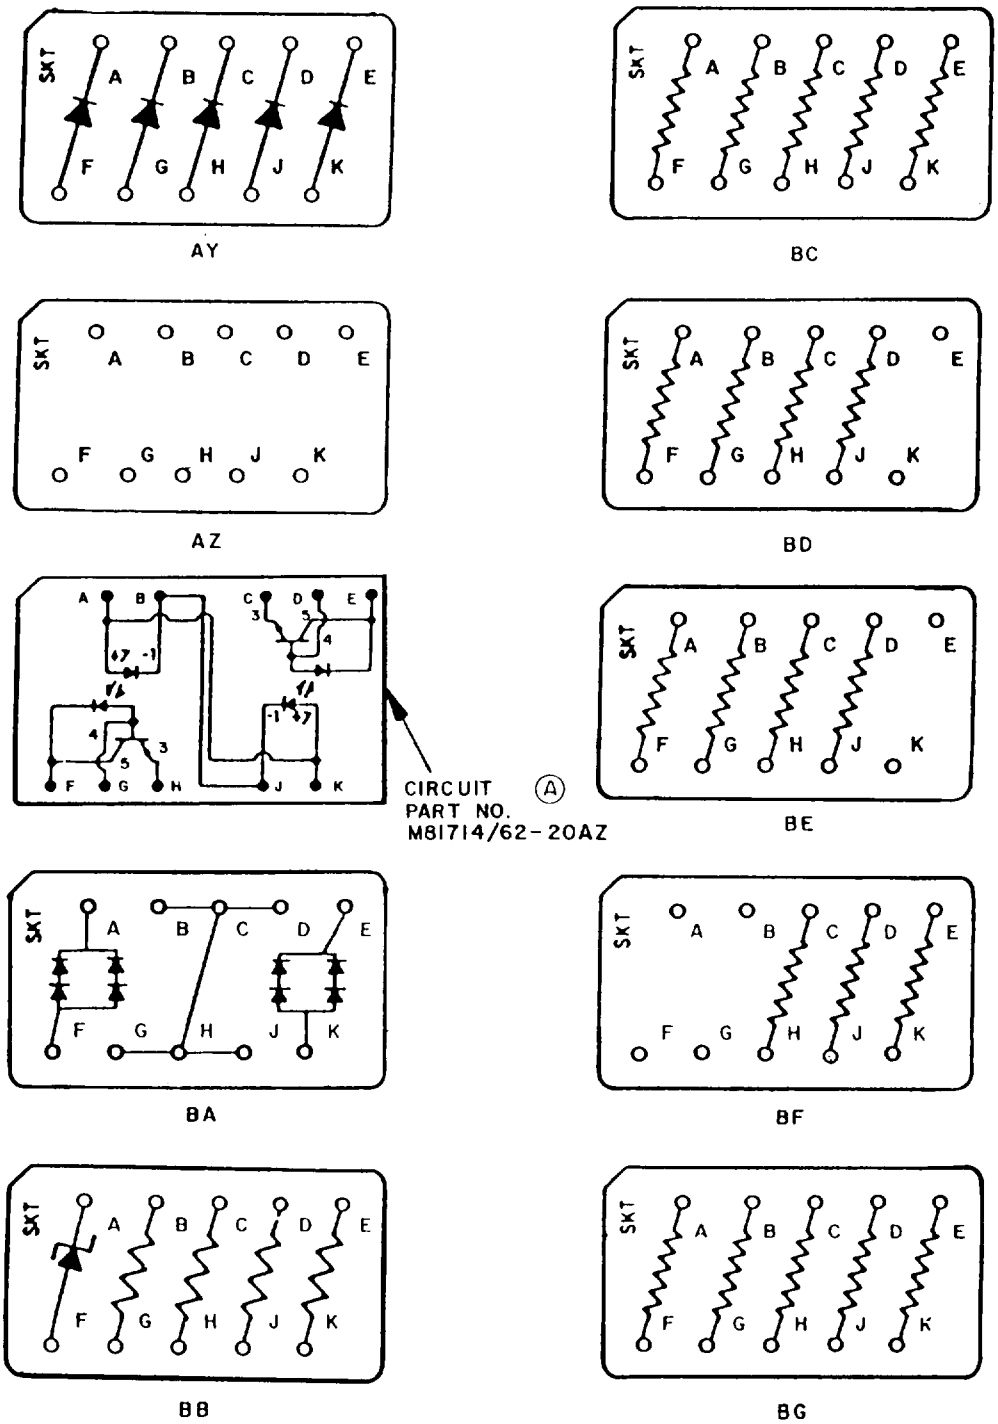


FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.



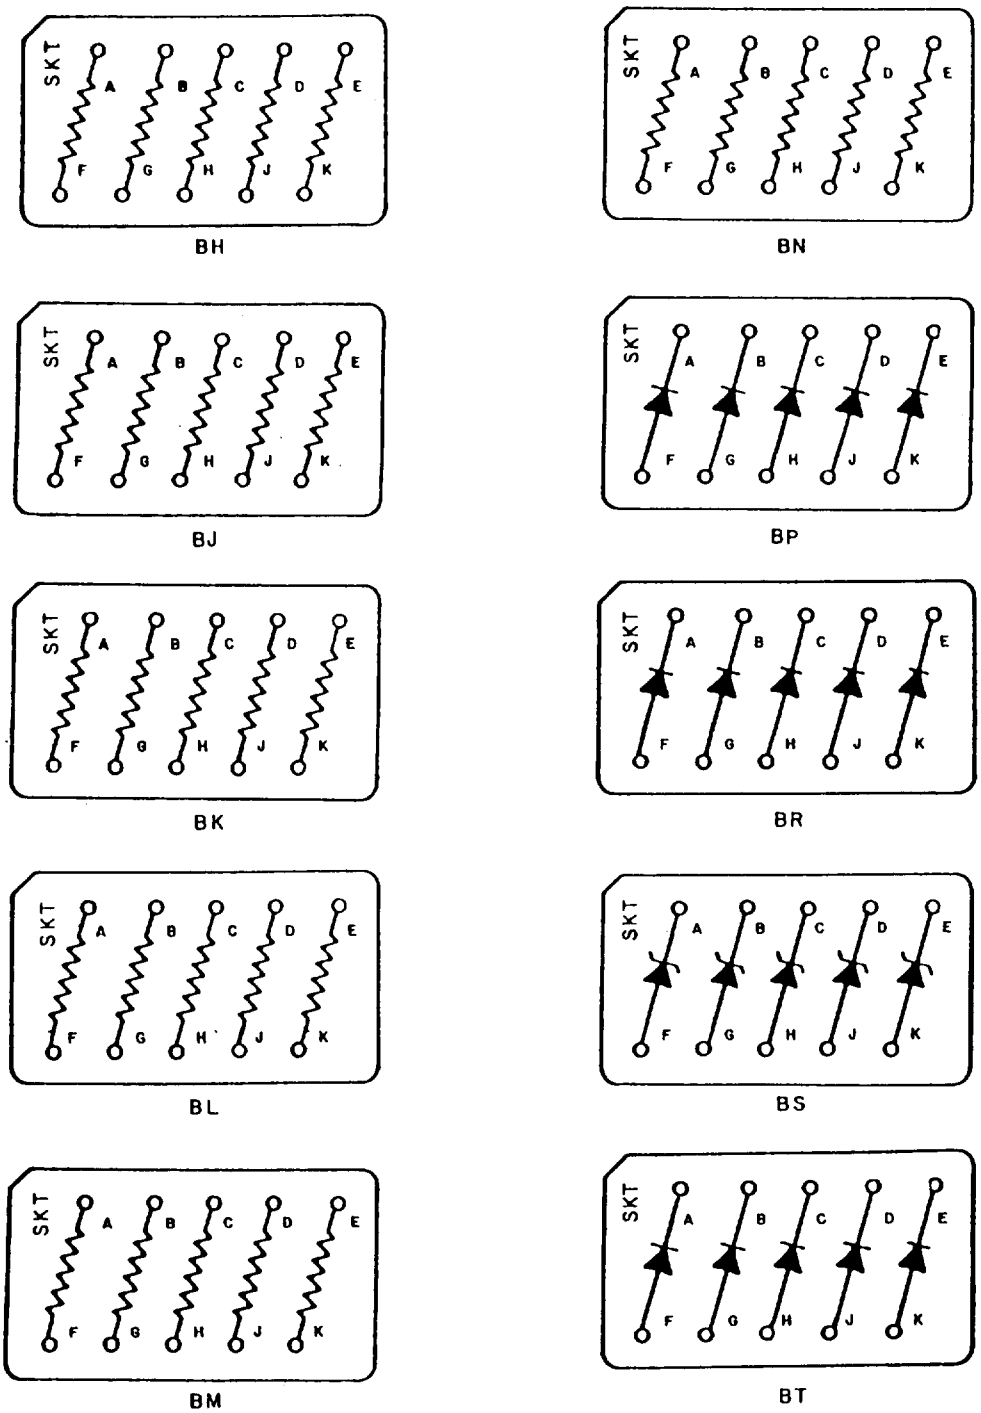


FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

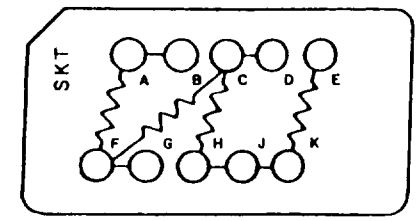


BW

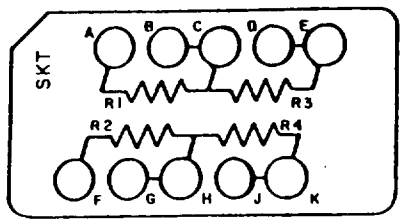


CB

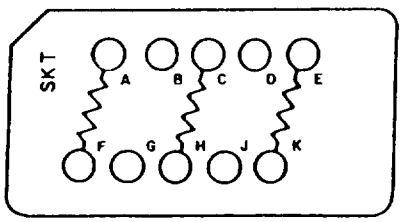


BX

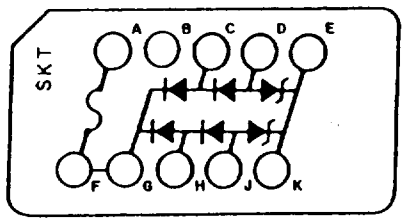


CC

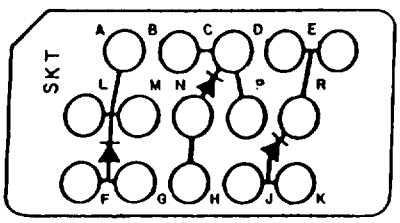


BY

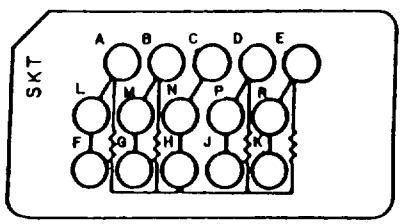


CD

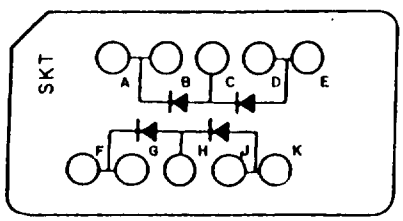


BZ

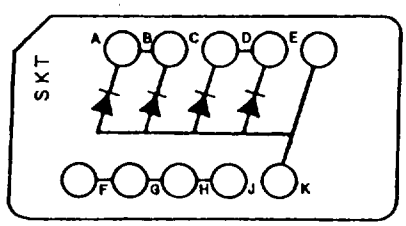

CE

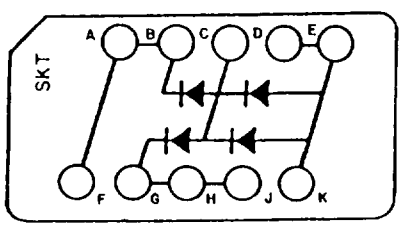

CA

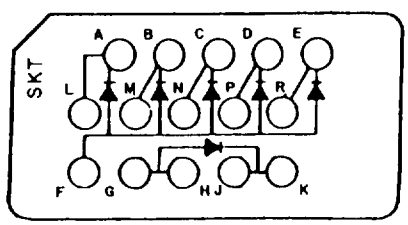

CF

FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.



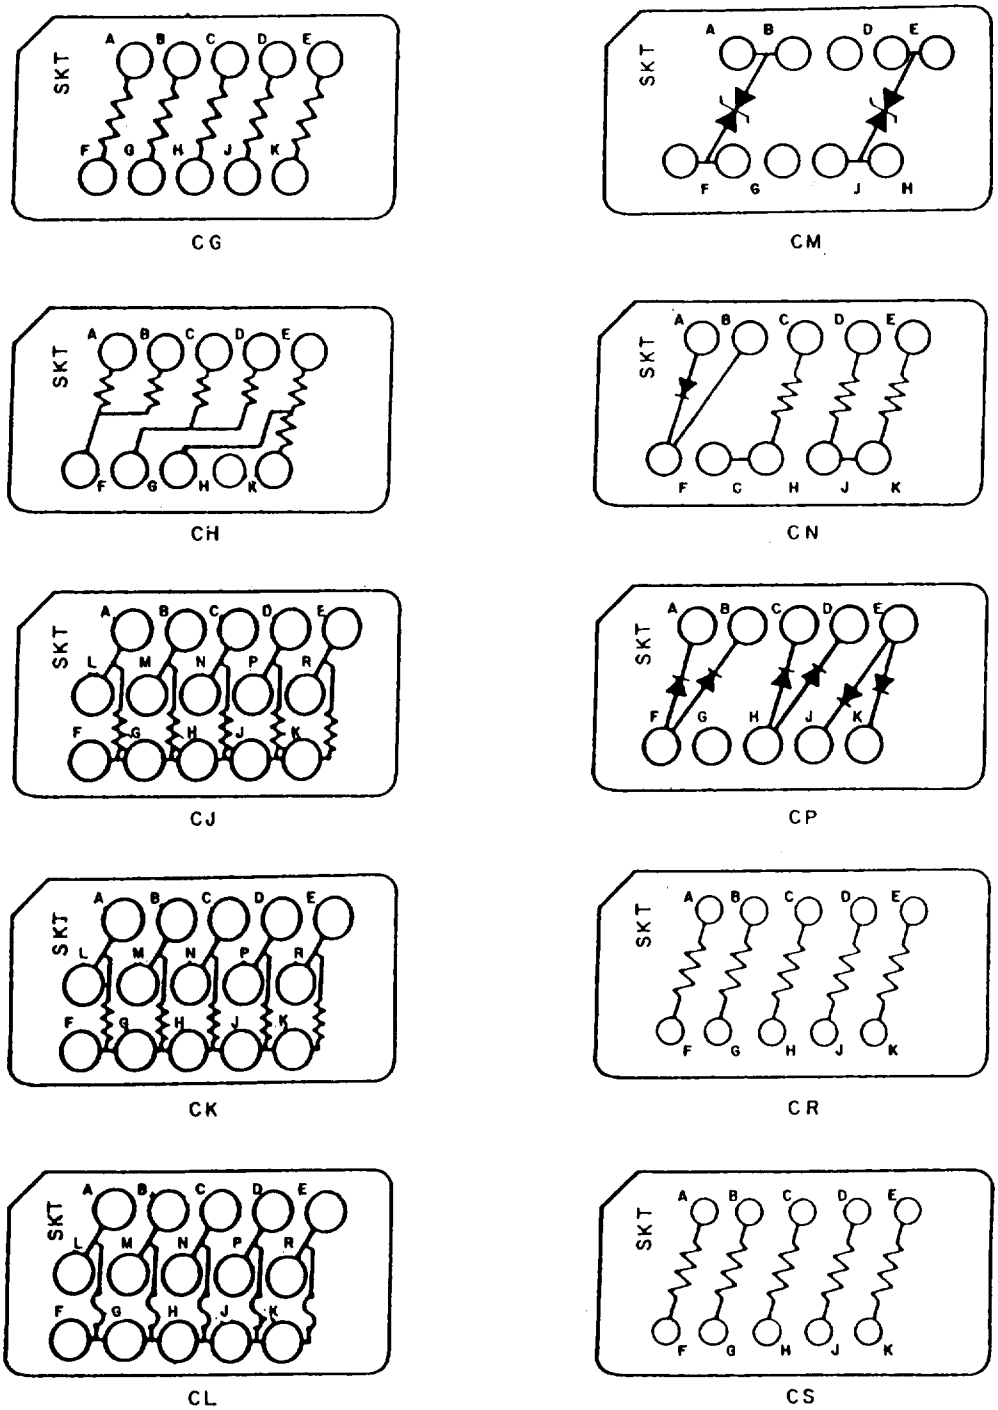


FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

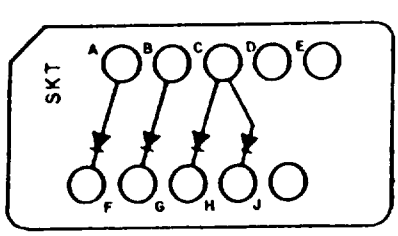


CT

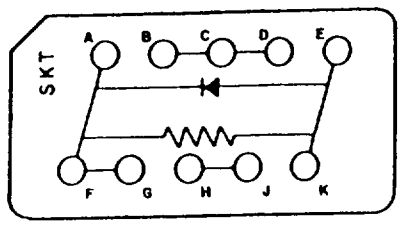


CZ

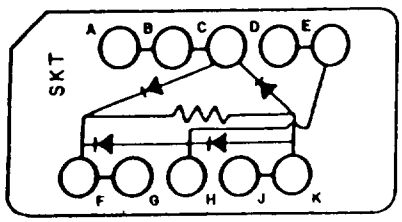


CW

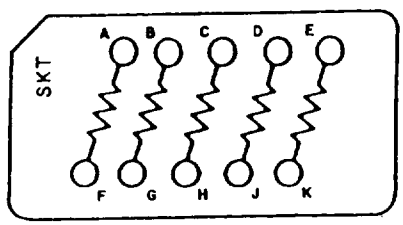


DA

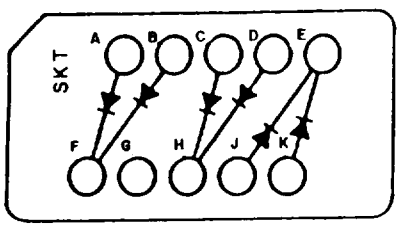


CX

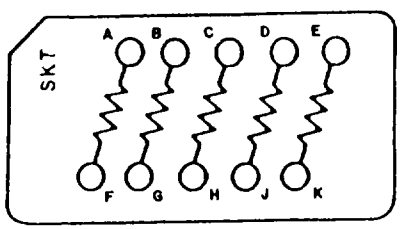

DB

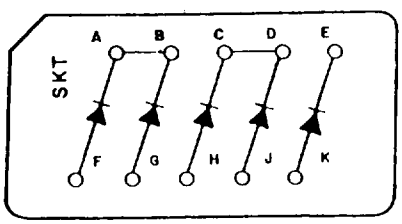

CY

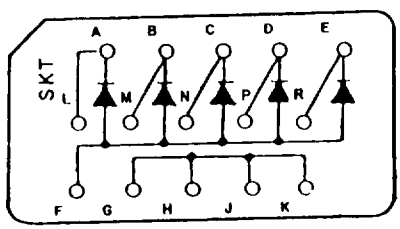

DC

FIGURE 2. Grommet cavity identification marking (see part number breakdown) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Module electronic component description.

Part Number	Component (Quantity)/Description
M81714/62-20AA	(5) - 150 OHM, 1/4 W Per MIL-R-39008A Resistors
M81714/62-20AB	(2) - 150 OHM, 1/4 W Per MIL-R-39008A Resistors (1) - 10 Microfarads 35 WVDC Capacitor
M81714/62-20AC	(4) - W110 Varo Rectifier
M81714/62-20AD	(5) - JANTX 1N5616 Per MIL-S-19500/427 Rectifiers
M81714/62-20AE	(3) - JANTX 1N6054A Per MIL-S-19500/507 Zener Diodes
M81714/62-20AF	(2) - JANTX 1N645 Per MIL-S-19500/256 (3) - JANTX 1N3613 Per MIL-S-19500/228 Diodes
M81714/62-20AG	(4) - JANTX 1N5618 Per MIL-S-19500/427 Rectifiers
M81714/62-20AH	(6) - JANTX 1N3613 Per MIL-S-19500/228 Rectifiers
M81714/62-20AJ	(4) - JANTX 1N4478A Per MIL-S-19500/406 Zener Diodes* *Alternate 1N4753 (4) - JANTX 1N3613 Per MIL-S-19500/228 Rectifier
M81714/62-20AK	(5) - JANTX 1N5618 Per MIL-S-19500/427 Rectifiers

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20AL	(5) - 10K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20AM	(4) - JANTX 1N5618 Per MIL-S-19500/427 Rectifiers (1) - 200 OHM, 1/8 W Per MIL-R-55182/3 Resistor
M81714/62-20AN	(2) - JANTX 1N5618 Per MIL-S-19500/427 Rectifier Diode (2) - 10K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20AP	(2) - JANTX 1N5618 Per MIL-S-19500/427 Diodes (1) - 110 OHM, 1/10 W Per MIL-R-55182/1 Resistor (1) - 10K OHM, 1/10 W Per MIL-R-55182/1 Resistor
M81714/62-20AR	(5) - JANTX 1N3613 Per MIL-S-19500/228 Rectifiers
M81714/62-20AS	(2) - 10K OHM, 1/10 W (1) - 1400 OHM, 1/10 W (1) - 1100 OHM, 1/10 W (1) - 20K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20AT	(2) - Microfarads 50 WVDC Per MIL-C-39014/2-1411 Capacitor (2) - 3610 OHM, 1/10 W Per MIL-R-55182/1 Resistor (1) - 100K OHM, 1/10 W Per MIL-R-55182/1 Resistor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20AW	(3) - JANTX 1N5550 Per MIL-S-19500/420 Rectifiers
M81714/62-20AX	(6) - JANTX 1N5809 Diodes
M81714/62-20AY	(5) - JANTX 1N5620 Per MIL-S-19500/427 Rectifiers
M81714/62-20AZ	(2) - Teledyne Relays Model 4N50 Opto-Isolator Per MIL-S-19500
M81714/62-20BA	(8) - JANTX 1N5550 Per MIL-S-19500/420 Rectifiers
M81714/62-20BB	(1) - JANTX 1N4954 Per MIL-S-19500/356 Diode (2) - 10K OHM, 1/10 W Resistors (2) - 1430 OHM, 1/10 W Resistors
M81714/62-20BC	(4) - 20K OHM, 1/10 W (1) - 10K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BD	(2) - 20K OHM, 1/10 W (2) - 10K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BE	(2) - 10K OHM, 1/10 W (1) - 1430 OHM, 1/10 W (1) - 1110 OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BF	(1) - 196K OHM, 1/10 W (1) - 357K OHM, 1/10 W (1) - 2K OHM, 1/10 W Per MIL-R-55182/1 Resistors

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20BG	(5) - 150 OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BH	(5) - 10.2K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BJ	(5) - 2.8K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20BK	(5) - 23.2K OHM, 1/20 W Per MIL-R-55182/7 Resistors
M81714/62-20BL	(5) - 24.9K OHM, 1/20 W Per MIL-R-55182/7 Resistors
M81714/62-20BM	(5) - 41.2K OHM, 1/20 W Per MIL-R-55182/7 Resistors
M81714/62-20BN	(5) - 49.9K OHM, 1/20 W Per MIL-R-55182/7 Resistors
M81714/62-20BP	(5) - JTXY 1N5550 Per MIL-S-19500/420 Diodes
M81714/62-20BR	(5) - JTXV 1N5418 Per MIL-S-19500/411 Rectifiers
M81714/62-20BS	(5) - JTXY 1N827 Per MIL-S-19500/159 Zener Diodes
M81714/62-20BT	(5) - JANTX 1N5552 Per MIL-S-19500/420 Diodes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20BW	(1) - A to F-40K, 1/10 W Resistor (1) - C to F-50K, 1/10 W (1) - C to H-50K, 1/10W (1) - E to H-40K, 1/10 W Resistors Per MIL-R-55182/1
M81714/62-20BX	(3) - 60.4 OHM, 2W Resistors Per MIL-R-390
M81714/62-20BY	(3) - JANTX 1N5618 Diodes Per MIL-S-19500/427 600 PIV - 1 AMP FWD Current - Med Recovery Rectifier
M81714/62-20BZ	(4) - JANTX 1N5416 Diodes Per MIL-S-19500/411 100 PIV - 3 AMP FWD Current - Fast Recovery Rectifier
M81714/62-20CA	(4) - JANTX 1N5416 Diodes Per MIL-S-19500/411 100 PIV - 3 AMP FWD Current - Fast Recovery Rectifier
M81714/62-20CB	(1) - A to C-3.3K, 1/4W (1) - C to D-4.5K, 1/4W (1) - F to G-3.3K, 1/4 W (1) - G to K-5.1K, 1/4 W Per MIL-R-39017 Resistors
M81714/62-20CC	(4) - JANTX 1N5416, Per MIL-S-19500/411 (2) - JANTX 1N4965 Per MIL-S-19500/356 Zener Diodes (1) - 2 AMP Fuse
M81714/62-20CD	(4) - 150 OHM, 1/4 W, MIL-R-11 RC Resistors

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20CE	(4) - JANTX 1N5416 Diodes Per MIL-S-19500/411 Current - Fast Recovery Rectifier
M81714/62-20CF	(6) - JANTX 1N5618 Diodes Per MIL-S-19500/427 PIV 1 AMP FWD Current - General Purpose Rectifier
M81714/62-20CG	(5) - 150 OHM, 1/4 W Per MIL-R-39017 Resistors
M81714/62-20CH	(6) - 4.7K, 1/4 W Per MIL-R-39017 Resistors
M81714/62-20CJ	(5) - 6.2K, 1/4 W Per MIL-R-39008 Resistors
M81714/62-20CK	(5) - 3K, 1/4 W Per MIL-R-39008 Resistors
M81714/62-20CL	(5) - 5 AMP - 125V Fuses Per MIL-STD-202
M81714/62-20CM	(2) - JANTX 1N6052A Diodes Per MIL-S-1900/507
M81714/62-20CN	(1) - JANTX 1N5618 Diode Per MIL-S-19500/427 (3) - RNC60H1002BP Resistors
M81714/62-20CP	(6) - JANTX 1N649-1 Diodes Per MIL-S-19500/228
M81714/62-20CR	(5) - 150 OHM Resistors
M81714/62-20CS	(1) - 820 OHM Resistor E-K (3) - 150 OHM Resistors A-F, B-G, C-H (1) - 51 OHM Resistor D-J

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Module electronic component description (continued).

Part Number	Component (Quantity)/Description
M81714/62-20CT	(4) - JANTX 1N5551 Diodes Per MIL-S-19500/420
M81714/62-20CW	(4) - JANTX 1N5619 Diodes Per MIL-S-19500/429 (1) - RLR20C2003FP Resistor
M81714/62-20CX	(6) - JANTX 1N649-1 Diodes Per MIL-S-19500/228
M81714/62-20CY	(5) - JANTX 1N5618 Diodes Per MIL-S-19500/427
M81714/62-20CZ	(1) - JANTX 1N5550 Diode Per MIL-S-19500/420 (1) - RWR81S100FR Resistor
M81714/62-20DA	(5) - 5.1K OHM, 1/10 W Per MIL-R-55182/1 Resistors
M81714/62-20DB	(5) - 600 OHM, 1/4 W Per MIL-R-39008 Resistors
M81714/62-20DC	(5) - JANTX 1N5618 Diodes Per MIL-S-19500/427 Silicon Rectifiers


Inch	mm	Inch	mm	Inch	mm	Inch	mm
.005	0.13	.015	0.38	.110	2.79	.649	16.48
.007	0.17	.035	0.89	.225	5.72	1.020	25.91
.010	0.25	.040	1.02	.350	8.89	1.040	26.42
.012	0.30	.077	1.96	.518	13.16	1.170	29.72

NOTES:

1. Dimensions are in inches.
2. Module is designed for installation in MIL-T-81714/67 rack or MIL-T-81714/68 bracket.
Ⓐ 3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

4. The part number consists of the letter M, specification sheet number, component designator and electronic component/circuit.

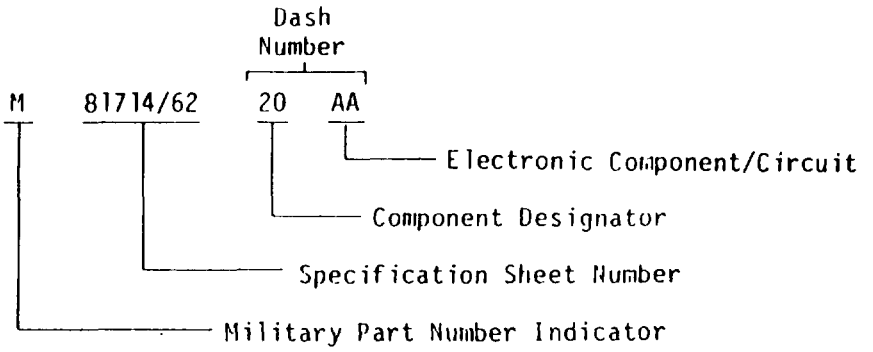

Part Number example:

M81714/62-20AA

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity
Air Force - 85
Project Number 5940-1103

Agent:
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.