[METRIC]
A-A-55817
13 November 1995
SUPERSEDING
MIL-C-28777/11A
13 April 1978

COMMERCIAL ITEM DESCRIPTION

CABLE ASSEMBLY, (TYPE II), ELECTRONIC TEST EQUIPMENT, (2 POLES, 3 WIRES, GROUNDED, 250 VOLTS, 10 AMPERES, 50 OR 60 HERTZ), GROUNDING PLUG CONNECTOR, AND STRAIGHT MOLDED TYPE II EQUIPMENT CONNECTOR

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-S-28777/11 for all federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description covers the requirements for a cable assembly, (type II), electronic test equipment, (2 poles, 3 wires, grounded, 250 volts, 10 amperes, 50 or 60 Hertz), grounding plug connector, also commonly known as a 250 volt power supply cord.

1.2 Intended use. This cable assembly is to be used with modified commercial off-the-shelf (COTS) equipment.

2. SALIENT CHARACTERISTICS.

2.1 Requirements. The cable assembly shall provide for the transmission of 250 volt, 10 ampere, 50 or 60 hertz ac power and shall be configured in accordance with figure 1. The cable shall meet the requirements of UL 62 for a class 43, AWG 18, SVT cable rated at 90°C (194°F). Unless otherwise specified (see 6.1), the cable shall be unshielded. The cable jacket shall be marked in accordance with section 71 of UL 62. The plug connector shall be molded to the jacket in accordance with section 56 of UL 817 and shall conform to NEMA WD-1 and figure 6-15 of NEMA WD-6. The equipment connector shall be a straight molded connector conforming to Standard Sheet E, Amendment 1, of ANSI/IEC 320-2-2. Unless otherwise specified (see 6.1), the length of the cable assembly shall not be less than 2,360 mm (93 in.) and not greater than 3,000 mm (118 in.).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VCA, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

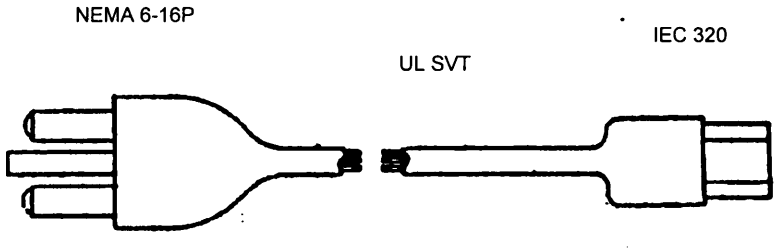

FIGURE I. Cable assembly

3. REGULATORY REQUIREMENTS.

3.1 Recycled, recovered or envionmentally preferable materials. Recycled, recovered or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

3.2 Environmental protection. The cable assembly shall meet all applicable Environmental Protection Agency Code of Regulation (CFR) in effect on the date of the contract. These regulations apply to the emission of material hazardous to the environment or the operator's health and shall be met during manufacturing, service, transportation, storage and operation.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Product certification. The product shall have been certified by a nationally recognized laboratory for compliance with the requirements of UL 817.

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery, and thereafter, as may be otherwise provided under the provisions of the contract.

4.3 Market acceptability. The item offered must have been sold to the government or commercial market.

5. PACKAGING. Unless otherwise specified (see 6.1), preservation, packing and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

6. NOTES.

6.1 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. Quantity required.
c. Shielded cable, if required (see 2.1).
d. Cable length, if different (see 2.1).
e. Packaging requirements, if different (see 5).

6.2 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

CID AA55817 shall replace the previous part number M28777/11-1

6.3 Source of documents.

6.3.1 Copies of Military and Federal documents may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

6.3.2 Copies of industry documents/standards referenced in this commercial item description may be obtained from the following addresses:

6.3.2.1 National Electrical Manufacturers Association (NEMA) 2101 L Street, Washington, D.C. 20037.

6.3.2.2 Underwriters Laboratories Inc. (UL) 1285 Walt Whitman Road, Melville, NY 11747.

6.3.2.3 American National Standards Institute Inc. (ANSI) 1430 Broadway, New York, NY 10018.

6.4 National stock numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSNs: 6150-00-565-5991

6.5 Known sources. The following is a list of sources known to meet the requirements of this commercial item description:

a. Belden Wire & Cable Company, P.O. Box 1980, Richmond, IN 47375
b. Quail Electronics Inc., 3987 First Street, Suite A, Livermore, CA 94550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

A-A-55817

MILITARY INTERESTS:

Custodians
Air Force - 99

Reviewers
Army - ME
Navy - SH
Air Force - 11, 85
DLA - ES

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - 7FXE

PREPARING ACTIVITY:
DLA - GS

Project 6150 - 0256

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.