INCH-POUND

A-A-52304
May 15, 1992

COMMERCIAL ITEM DESCRIPTION

LETTERING SETS AND ACCESSORIES

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GG-L-256.

This description covers drafting equipment consisting of lettering sets and accessories.

Salient characteristics:

Design: The lettering sets shall be as specified herein and as shown on figures 1 through 5. The scribers shall be as specified and as shown on figures 1 and 3. They shall consist of a metal base and shall accept all pens and lead holders that are designed to be used with the scriber. The templates shall be as described and as shown on figure 2. Pens shall be as specified, each containing a self-contained free-floating cleaning pin, point, and either an integral inkwell or reservoir. A lead holder shall receive and hold the lead firmly and fit the scriber for use in pencil lettering.

Classification: Lettering sets and accessories shall be of the following types, sets, styles, classes, kinds, sizes, symbols, series, and designs:

Lettering sets:

Type I - Lettering sets using a scriber in conjunction with an engraved lettering template (for complete contents see table I):

Set 1 - Eleven templates, ten standard pens.
Set 2 - Nine templates, ten standard pens.
Set 3 - Eight templates, ten standard pens.
Set 4 - Five templates, five standard pens.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and other data which may improve this document should be sent by letter to: Commander, U.S. Army Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Set 9 - Thirty templates, six standard pens.
Set 10 - Thirteen templates, five standard pens.
Set 11 - Seven templates, three standard pens.
Set 12 - Four templates, two standard pens.
*Set 13 - Twelve templates, nine reservoir pens.
*Set 14 - Eight templates, eight reservoir pens.
*Set 15 - Five templates, five reservoir pens.
*Set 16 - Three templates, three reservoir pens.
*Set 17 - Eleven templates, eleven standard pens, seven reservoir pens.
*Set 18 - Eight templates, ten standard pens, seven reservoir pens.
*Set 19 - Five templates, five standard pens, five reservoir pens.
*Set 20 - Three templates, three standard pens, two reservoir pens.

*Add "J" for jewel-tipped reservoir pens (e.g., Set 17J).

Type II - Lettering sets using lettering pens with templates with cut-out character guide slots (see figure 5):

Class 1 - Vertical lettering.
Class 2 - Slant Lettering.

Set 5 - Five templates, class 1 or 2, upper case letters and numerals; five pens.
Set 6 - Two templates, class 1, upper and lower case letters and numerals; one pen.
Set 7 - Three templates, class 1, upper and lower case letters and numerals; four pens.
Set 8 - One template, class 1 or 2, upper and lower case letters and numerals; one pen.

Note. For accessories of each set, see table II.

Accessories: Individual accessories shall be as specified in the acquisition requirements and shall be as shown in tables I and II.

I Scribers:

Style 1 - For use with an engraved lettering template with groove.
Style 2 - For use with an engraved lettering template with grooved holder.

Kind 1 - For use with templates up to 0.650 characters.
Kind 2 - For use with templates larger than 0.700 characters.

Symbol a - Fixed scriber.
Symbol b - Adjustable scriber.

II Templates:

Series 1 - Templates with engraved characters and groove.
Series 2 - Templates with cut-out character guide slots.
Series 3 - Templates with engraved characters for use with grooved holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

III Pens:

Design 1 - Standard pen (inkwell).
Design 2 - Reservoir pen.

IV Penholders:

Size 1 - For standard pen Sizes 0000 to 8.
Size 2 - For standard pen Sizes 9 to 14.

Materials:

Templates: Templates shall be made from methacrylate plastic sheet or rigid vinyl chloride polymer and vinyl chloride-vinyl acetate copolymer with a final durometer reading of 83 ±3. The templates shall be three or more laminates (0.120 ±0.005 inch thick) with an inner black core 0.100 inch thick and two outer white laminates 0.010 ±0.002 inch thick.

Scribers: Scribers shall have a metal base. Methacrylate plastic can be used for other molded parts.

Pens: Pens shall be fabricated of a molded methacrylate plastic. The tip inserts of narrow line standard pens up to size 1 and reservoir pens up to size 5 shall be stainless steel. The inkwell for the standard pens shall be leaded brass. Wide line standard pens above size 1 points shall be made of leaded brass. Cleaning pins of narrow line standard pens up to size 1 and reservoir pens up to size 5 shall be stainless steel. Cleaning pins of wide line standard pens above size 1 shall be made of leaded brass. Cleaning pins of wide line reservoir pens above size 5 shall be made of copper alloy.

Lead holders: The lead holder shall be metal with a plastic or metal handle.

Metal plating: Points of narrow line reservoir pens up to size 5 shall be chrome-plated. Points and cleaning pins of wide line standard pens shall be nickel-plated.

Finish: All surfaces shall have a smooth finish. Metal surfaces shall have a corrosion-resistant finish.

Cases: Each lettering set shall have a fitted hardwood or molded plastic case with a hinged lid to be fastened with one or more latches or fasteners.

Design details:

Type I:

Templates: Grooves for forming each of the characters shall be of equal width and depth so that when used with the scriber the resultant formed characters will not be uneven or wavy. The grooves shall also be engraved through the white outer plastic layer into the black center layer to provide black letters on a white background. Each

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

character shall be engraved so that when the template is in use the bottom of each lettered character shall be in line so that no deviation from a straight baseline is apparent. All long edges shall be straight and parallel. The ends shall be at right angles to the long edges with the corners slightly rounded.

Series 1: The templates shall have a groove for the tailpin of the scriber incorporated into each template. The groove shall be of such width so as to fit the tailpin of the scriber. When in use, the tailpin shall move freely in the groove with just enough clearance to avoid sticking, yet provide straight and even-lettered characters. Only one size of character shall be incorporated on any one template. Upper case letters and numerals may be on one side and lower case letters and numerals and punctuation marks on the other side, at the discretion of the contractor. When both sides are used, the resultant lettering shall not deviate from a straight line when the template is reversed.

Series 3: The template shall rest on the upper surface of a template holder and shall be movable to right or left by the hand of the operator. Grooves for forming the characters may be engraved on one or both sides of the template. The template holder shall incorporate the groove for the tailpin of the scriber. A nonslip feature shall be provided on the undersurface of the holder so that it is not necessary to hold it in position. When both sides are used, the resultant lettering shall not deviate from a straight line when the template is reversed.

Scribers:

Styles 1 and 2 (see figures 1 and 3): The scribers shall consist of a metal base and shall accept all pens and lead holders which are designed to be used with the scriber. A clamping device, screw, lever, or threaded metal bushing for securing the pen or lead holder shall be incorporated into the scriber arm. This device shall allow inserting, securing, and removing of the pen and lead holder with ease. A stand (integral or separate) shall be provided with each scriber to hold the pen free of the work surface when not in use. The tracer pin arm of the symbol "b" scriber shall be adjustable so that vertical characters are formed when the arm is in the closed position and 22-1/2 degrees shall be formed when the arm is set between the open and closed positions. Symbol "a" scribers shall form vertical characters when used with series 1 templates listed in table I. Kind I scribers shall be fitted with a double-ended reversible tracer pin to fit both regular and fine groove templates. A cover shall be provided for the tracer pin when not in use.

Pens:

Design 1: Design 1 pen for the type I set shall consist of a pen with integral inkwell and a self-contained free-floating cleaning pin. The bottom of the inkwell shall form a shoulder to facilitate correct seating of the pen in the scriber. The shank of the pen below the inkwell shall be 0.118 inch, ±0.002 inch. The point sizes shall be to the contractor's specifications for various line widths.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Design 2: Design 2 pen for the type I set shall be a reservoir-type pen having a self-contained free-floating cleaning pin, a point and a sealed refillable translucent unbreakable reservoir. A cap shall be provided to protect the tip when the pen is not in use. The tip shall have a step in the diameter to eliminate the risk of smearing caused by capillary action when the pen is in use. The component parts of each pen shall be identified and color coded by size. When specified in the acquisition requirements, a reservoir pen shall be provided with a jeweled point to permit longer wearing and shall be identified by a capital "J". The jeweled point shall be furnished with a cleaning pin which has been treated for longer wearing quality. The reservoir pens shall fit their respective scribers. Point sizes shall be to the contractor's specifications for various line widths. Design 2 pens shall be designed to be used with a holder for hand drawing and lettering.

Lead holder: The lead holder shall receive and hold the lead firmly, and shall fit the scriber for use in pencil lettering. The lead holder shall be of the mechanical type with mechanical advance of the lead. The shank shall be of chrome-plated brass and shall fit the scriber for use in pencil lettering.

Standard socket adapter and penholder: The standard socket adapter and penholder shall be either a separate metal adjustable socket adapter designed so as to hold the lettering pen at the correct angle which fits into a separate penholder, or a combined metal socket adapter and penholder equipped with a clamp which permits easy insertion of and removal of pens.

Reservoir penholder: The reservoir penholder shall be of a tubular type normally used for reservoir lettering pens.

Type II:

Class 1 instruments:

Templates, series 2: The templates shall be suitable for use with lettering pens specified below for forming vertical letters, numerals, or other characters. The guide slots for forming the characters shall be cut entirely through the templates. The templates shall be made of transparent plastic and shall provide clearance of wet ink on previously lettered work.

Technical pens: Class 1 pens shall consist of a tubular holder, self-contained free-floating cleaning pin, a point, and a sealed refillable translucent unbreakable reservoir. A cap with clip shall be provided to protect the point when the pen is not in use. The point shall have a step in the diameter to eliminate the risk of smearing caused by capillary action when the pen is in use. The component parts of each pen shall be identified and color coded by size. When specified in the acquisition requirements, a technical pen shall be provided with a jeweled point to permit longer wearing and shall be identified by a capital "J". The jeweled point shall be furnished with a cleaning pin which has been treated for longer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

wearing quality. Point sizes shall be to the contractor's specification for various line widths.

Class 2 instruments: Class 2 instruments shall be identical to class 1 instruments, except that the templates shall be designed for forming slant letters, numerals, or other characters.

Workmanship: The instruments shall be free from defects which could impair their accuracy or serviceability. The instruments shall have no rough edges, burrs, cracks, chips, or scratches.

Certification of commercial item: The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements: In accordance with Federal Acquisition Regulation, section 23.403, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the supplier's employees to undue hazards from the recovered materials.

Preservation, packing, and marking: Preservation, packing, and marking shall be as specified in the contract or purchase order.


Quality assurance: The lettering sets and accessories shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Type not as specified.
2. Class, sets, style, kind, symbols, series, and size not as specified.
3. Material not as specified.
4. Design not as specified.
5. Workmanship not as specified.
6. Metal plating not as specified.
7. Finish not as specified.
8. Case not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

CID based part identification number: The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Part or identifying number (PIN): The PIN to be used for lettering sets and accessories acquired to this commercial item description are created as follows:

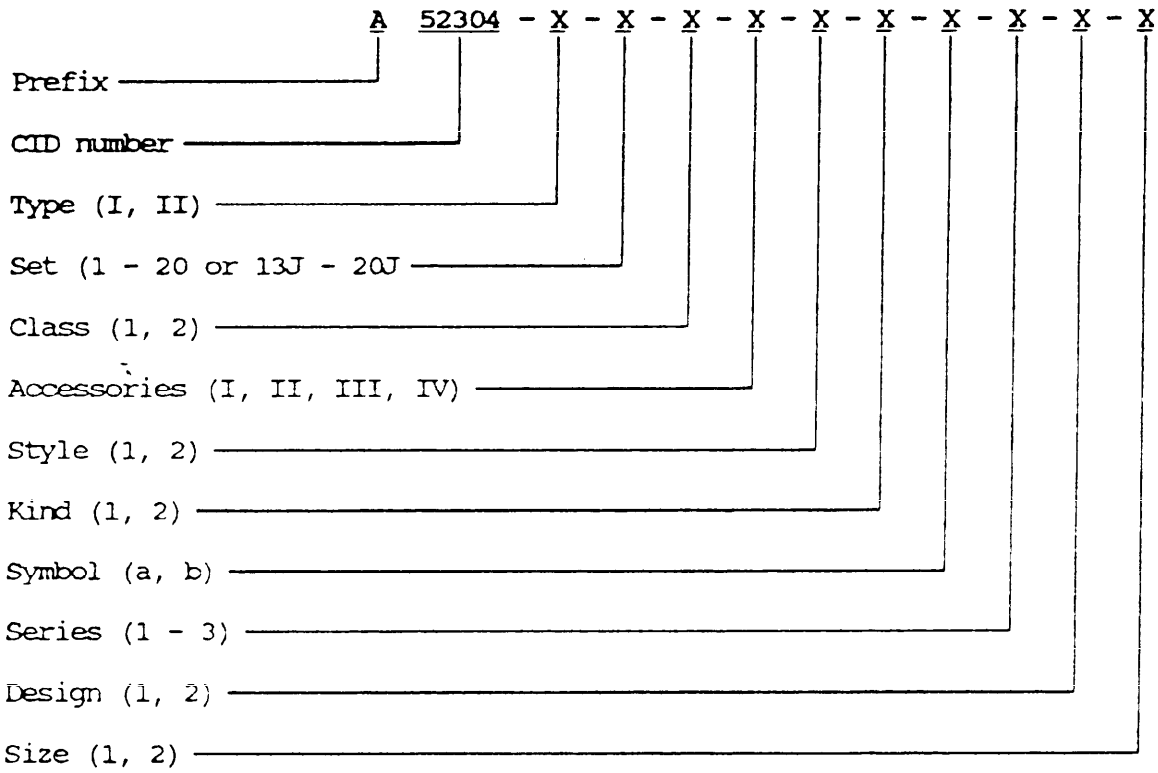

Notes:

Intended use: The lettering sets are intended for use in lettering reports, charts, maps, and engineering and architectural drawings.

The procuring agency should specify the preferred options permitted herein and include the following information in procurement documents:

1. Title, number, and date of this item description.
2. Type, set, class, style, kind, symbol, series, design, and size, as applicable, of lettering set and accessories required.
3. Certification that the model offered meets all requirements of this item description.
4. When this commercial item description is used for procurement, the commercial item certification clause must appear in the solicitation.
5. When a PIN number is required.
6. FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

The following are suggested sources of supply for this item description (Competition is not limited to these sources).

1. Alvin and Company, Inc., P. O. Box 188, Windsor, CN 06095-0705.
2. Keufel and Esser Co., Department TR, Ford Road, Rockaway, NJ 07866.
3. Lutz Superdyne Inc., 815 Broad Ave., P. O. Box 57, Ridgefield, NJ 07657.

Preparing activity for this CID is: Commander, US Army Belvoir RD&E Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

MILITARY INTERESTS:

Custodians

Army - ME
Air Force - 99

Review Activity

DLA - GS

User Activities

Army - AR
Navy - MC, YD

CIVIC AGENCY COORDINATING ACTIVITIES:

GSA - FSS
HEW - NIH

PREPARING ACTIVITY:

Army - ME

Project 6675-0963

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Table I. Type I Lettering Sets and Accessories

Each set shall contain templates for capital and lower case letters and numerals, as indicated by "x"
Series 1 or 3 templates 1/3/

Contents of Type I lettering sets

Type of characters: 2/ C - Capital letters L - Lower case N - Numerals	Height of letters in inches ±0.002	Set No. 1	Set No. 2	Set No. 3	Set No. 4	Set No. 9	Set No. 10	Set No. 11	Set No. 12	Set No. 13	Set No. 14	Set No. 15	Set No. 16	Set No. 17	Set No. 18	Set No. 19	Set No. 20
60 CLN	0.060					x				x							
80 CN	0.080		x			x											
80 CLN	0.080	x								x	x			x			
90 CN	0.090					x											
100 L	0.100					x	x										
100 CN	0.100		x			x	x										
100 CLN	0.100	x		x						x	x	x	x	x	x		x
120 L	0.120					x	x										
120 CN	0.120		x			x	x										
120 CLN	0.120	x		x						x	x	x		x	x		
140 L	0.140					x	x	x									
140 CN	0.140					x	x	x	x								
140 CLN	0.140	x	x	x	x					x	x	x	x	x	x	x	x
175 L	0.175					x	x	x									
175 CN	0.175					x	x	x	x								
175 CLN	0.175	x	x	x	x					x	x	x		x	x	x	
200 L	0.200					x	x										
200 CN	0.200					x	x										
200 CLN	0.200	x	x	x						x	x	x	x	x	x		
240 C	0.240					x	x	x	x								
240 L	0.240					x	x	x									
240 N	0.240					x	x	x	x								
240 CN	0.240																
240 CLN	0.240	x	x	x	x												
290 C	0.290					x				x				x	x	x	x

X-3480

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:08Z
Check the source to verify that this is the current version before use.

Table I. Type 1 Lettering Sets and Accessories (Continued)

Each set shall contain templates for capital and lower case letters and numerals, as indicated by "x"

Contents of Type 1 lettering sets

Series 1 or 3 templates 1/3/ (continued)

Type of characters: 2/ C - Capital letters L - Lower case N - Numerals	Height of letters in inches ±0.002	Set No. 1	Set No. 2	Set No. 3	Set No. 4	Set No. 9	Set No. 10	Set No. 11	Set No. 12	Set No. 13	Set No. 14	Set No. 15	Set No. 16	Set No. 17	Set No. 18	Set No. 19	Set No. 20
290 L	0.290					x											
290 N	0.290					x											
290 CN	0.290																
290 CLN	0.290	x															
350 C	0.350									x				x			
350 L	0.350					x											
350 N	0.350					x											
350 CN	0.350		x			x											
350 CLN	0.350	x		x	x												
425 C	0.425									x	x			x	x	x	
425 L	0.425					x											
425 N	0.425					x											
425 CN	0.425					x											
425 CLN	0.425	x															
500 C	0.500									x				x			
500 L	0.500					x											
500 N	0.500					x											
500 CN	0.500		x			x											
500 CLN	0.500	x		x	x												
625 C	0.625									x	x			x	x	x	
625 L	0.625					x											
625 N	0.625					x											
625 CN	0.625					x											
625 CLN	0.625																

Source: https://assist.dla.mil -- Downloaded: 20260-26T09:08Z
Check the source to verify that this is the current version before use.

Table I. Type I Lettering Sets and Accessories (Continued)

Contents of Type I lettering sets

Size No.	Line Width ±0.003 in.	Set No. 1	Set No. 2	Set No. 3	Set No. 4	Set No. 9	Set No. 10	Set No. 11	Set No. 12	Set No. 13	Set No. 14	Set No. 15	Set No. 16	Set No. 17	Set No. 18	Set No. 19	Set No. 20
Design 1 standard pens 1/																	
0000	0.008																
000	0.010																
00	0.013	x	x	x		x	x							x			
0	0.017	x	x	x		x	x	x						x	x		x
1	0.021	x	x	x	x									x	x		
2	0.026	x	x	x	x	x	x	x	x					x	x	x	x
3	0.035	x	x	x	x	x	x	x	x					x	x	x	x
4	0.043	x	x	x	x									x	x	x	
5	0.055	x	x	x		x	x							x	x	x	
6	0.067	x	x	x	x	x								x	x		
7	0.083	x	x	x										x	x		
8	0.093	x	x	x										x			
9	0.125																
10	0.150																
12	0.200																
14	0.250																
Design 2 reservoir pens 1/																	
0000	0.008									x	x						
000	0.010									x	x						
00	0.013									x	x	x	x	x	x		x
0	0.017									x	x	x	x	x	x	x	x
1	0.021									x	x	x	x	x	x	x	
2	0.026									x	x	x	x	x	x	x	
3	0.035									x	x	x	x	x	x	x	
4	0.043									x	x	x	x	x	x	x	
5	0.055									x	x			x	x	x	
6	0.065									x	x			x	x	x	
7	0.083									x	x						
8	0.098																

A-A-52304

X-3482A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

TABLE I. Type I Lettering Sets and Accessories.-(Continued)

Contents of Type I lettering sets

Size No.	Line Width ±0.003 In.	Set No.1	Set No.2	Set No.3	Set No.4	Set No.9	Set No.10	Set No.11	Set No.12	Set No.13	Set No.14	Set No.15	Set No.16	Set No.17	Set No.18	Set No.19	Set No.20
Design 2 reservoir pens 1/ (continued)																	
9	0.125																
10	0.150																
12	0.200																
14	0.250																
Styles 1, and 2 Scribers 1/3/																	
Kind 1, Symbol a									x								
Kind 2, Symbol a		x	x	x	x	x	x	x		x	x	x	x	x	x	x	x
Kind 1, Symbol b																	
Kind 2, Symbol b																	
Standard Pen Socket Adapter and Penholder																	
Size 1		x	x	x	x	x	x	x	x					x	x	x	x
Size 2										x	x	x	x	x	x	x	x
Reservoir Pen Holder										x	x	x	x	x	x	x	x
Lead Holder		x	x	x	x					x	x	x	x	x	x	x	x
Case with Tray		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Ink Cartridge		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Template Holder 4/		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x

X-3483A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Table I. Type I Lettering Sets and Accessories.-(Continued)

*When jewel-tipped reservoir or technical pens are required, add "J" after size (i.e., 00J).

1/ Scribers, Kind 1, pen sizes No. 8 and smaller are designed for use with templates for 0.5-inch characters and smaller. Scribers, Kind 2, pen sizes No. 9 to 14 are designed for use with templates for 0.7- to 2.0-inch characters.

2/ Provisions for forming the following additional characters shall be included on each size of templates: ( ), %, &, ", =, and ,.

3/ Use Series 1 and 3 templates with either Style 1 or 2 scribers.

4/ Template holder is only required with Series 3 templates.

Note 1. Capital letters, lower case letters, and numerals for each type of letter may be supplied as one or more templates based on Contractor's standard commercial practice.

Note 2. Size numbers may vary in accordance with Contractor's standard commercial practice, but the widths of line shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

X-3484B

Table II. Type II Lettering Sets and Accessories.

Each set shall contain one each of the items indicated by "X"			Contents of Type II lettering sets			
Templates 1/			Set No. 5	Set No. 6	Set No. 7	Set No. 8
Type of characters: C-upper case L-lower case N-numerals	Class	Height of letters in inches (height of lower case letters is height of capital letters with which used)	class 1 or 2 instruments	class 1 instruments	class 1 instruments	class 1 or 2 instruments
CN	1 or 2	0.09	---	---	---	---
CN	1 or 2	.120	---	---	---	---
LCN	1 or 2	.125	---	---	---	---
CN	1 or 2	.140	X	---	---	---
CN	1 or 2	.175	X	---	---	---
LCN 2/	1	.185	---	X	---	---
LCN	1 or 2	.188	---	---	---	---
CN	1 or 2	.240	X	---	---	---
LCN 2/	1	.250	---	X	X	---
CN	1	.290	---	---	---	---
CN	1 or 2	.350	X	---	---	---
CN 2/	1	.375	---	---	---	---
LCN	1 or 2	.375	---	---	X	X
CN	1	.425	---	---	---	---
CN	1	.500	X	---	---	---
CN	1	.500	---	---	---	---
LCN	1 or 2	.500	---	---	X	---
CN 2/	1	.625	---	---	---	---
CN	1 or 2	.200	---	---	---	---
LCN	1 or 2	.250	---	---	---	---

X-3485A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

TABLE II. Type II Lettering Sets and Accessories-(Continued)

Each set shall contain one each of the items indicated by "x"		Contents of Type II lettering sets.			
Pens		Set No. 5	Set No. 6	Set No. 7	Set No. 8
Size No.	Width of line formed in inches ± 0.002 in.				
2	0.063	x	---	x	---
3	.049	x	---	x	---
4	.035	x	---	x	x
5	.026	x	---	x	---
6	.026	x	x	---	---
7	017	---	---	---	---
Case, wood or plastic.		x	x	x	3/

1/ Templates for forming characters of a single size, grade, and class may be furnished as three separate templates or less (such as one each for capital letters, lower case letters, and numerals).

2/ Shall form either standard or condensed vertical Gothic characters.

3/ Not required.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T09:08Z
Check the source to verify that this is the current version before use.

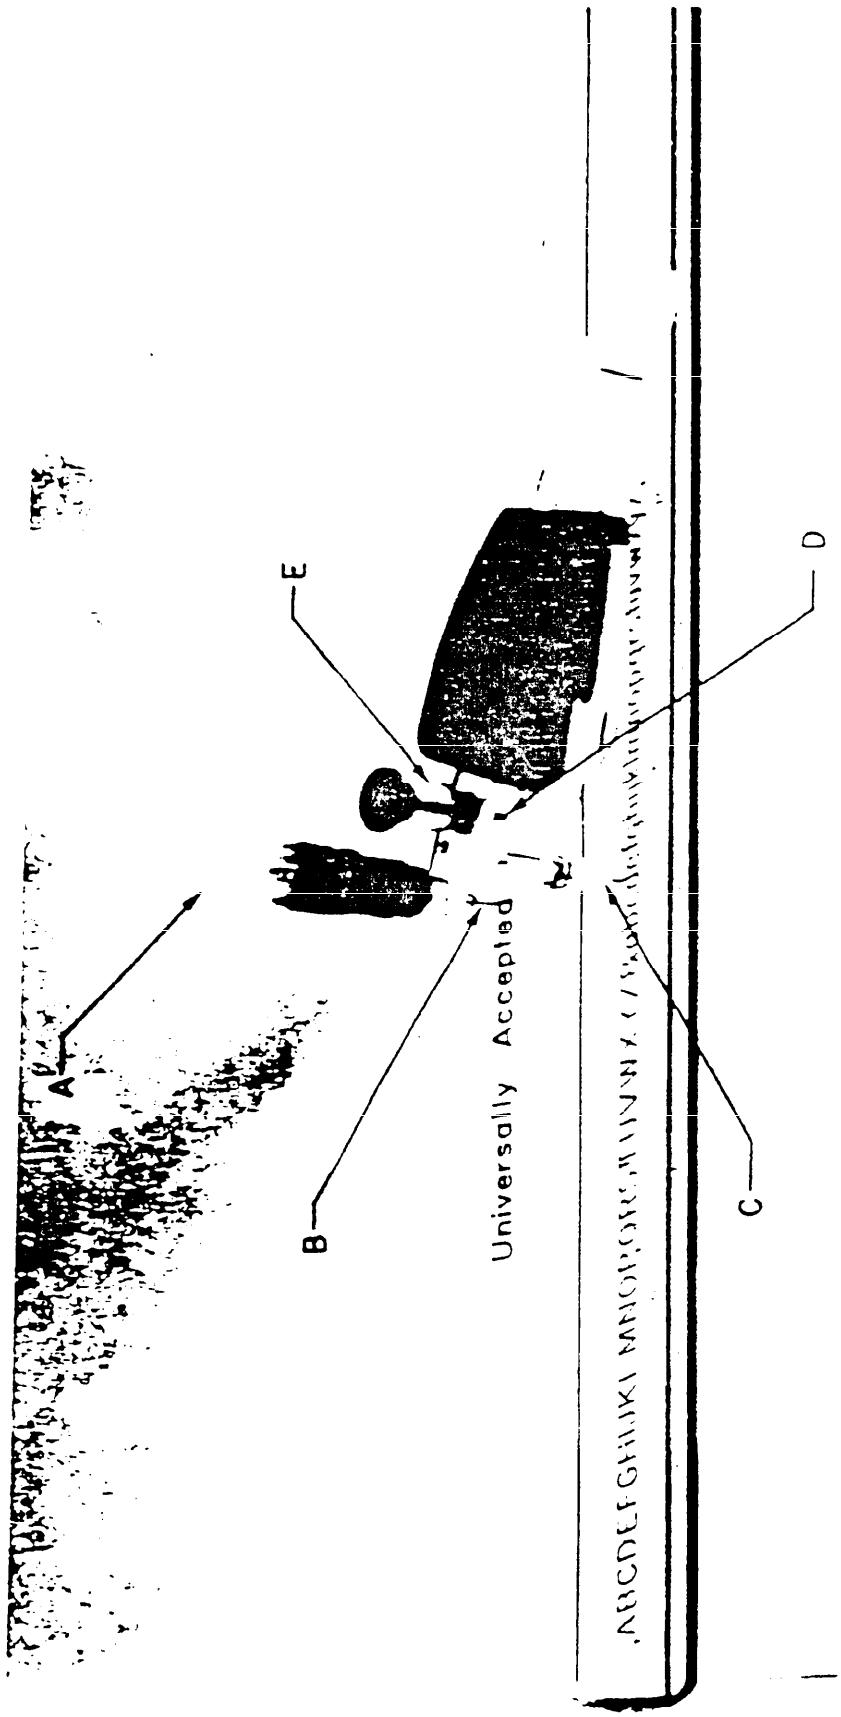



FIGURE 1. TYPE I, STYLE 1 SCRIBER

REPLACMENT PARTS

A - INK RESERVOIR
B - POINT (PEN)
C - TRACER PIN
D - SCREW, ADJUSTMENT
E - NUT LOCK

X-2252

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

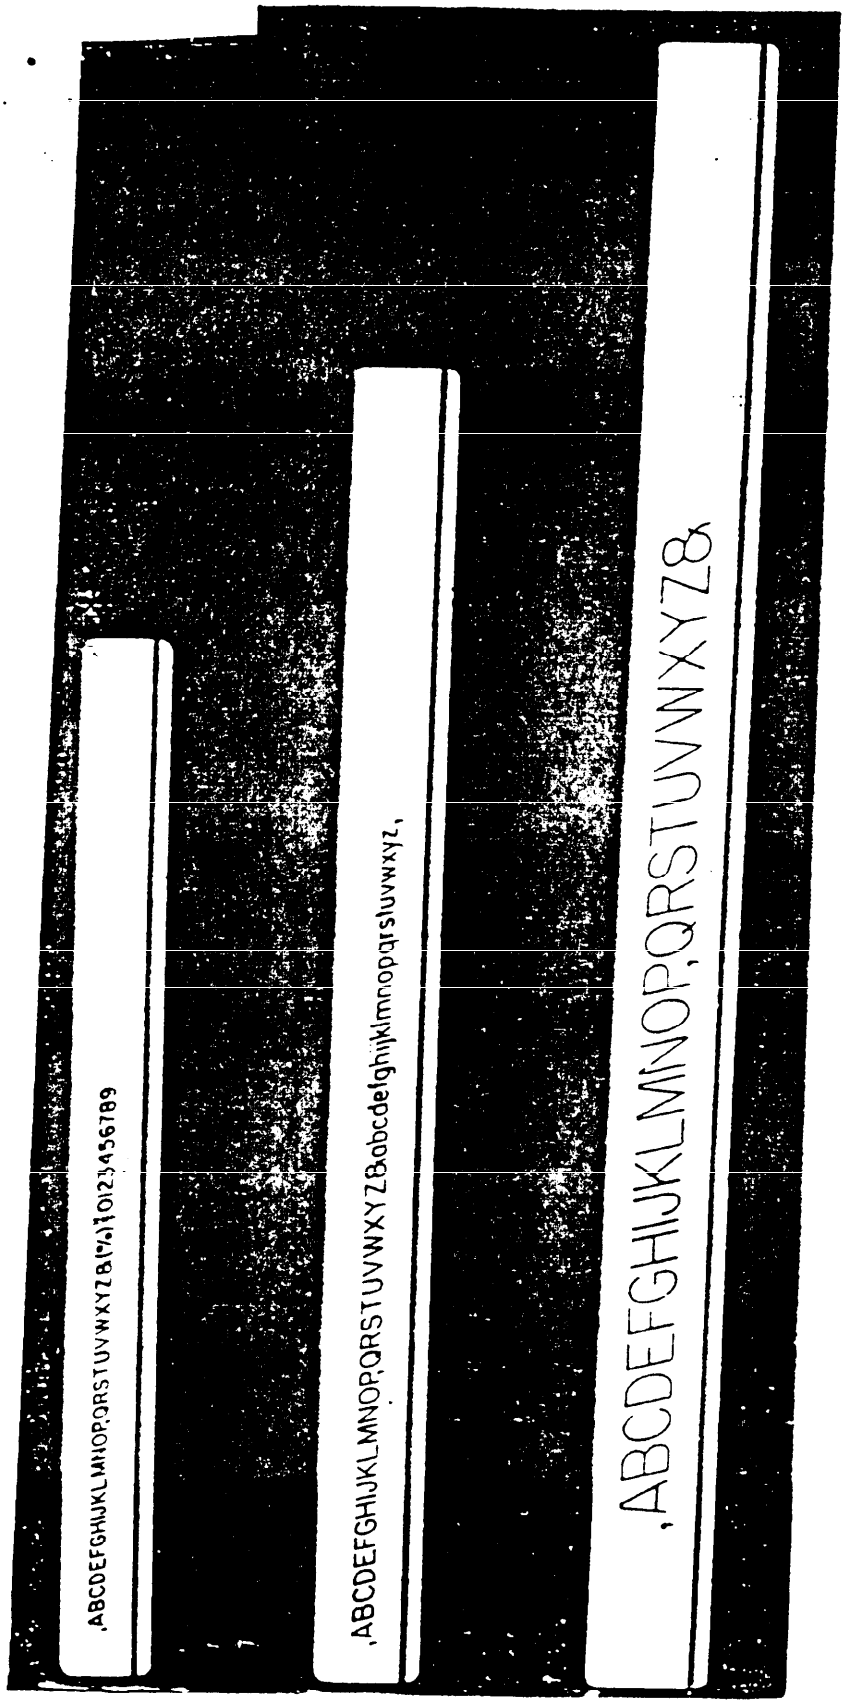

X-2253

FIGURE 2. SERIES 1, TEMPLATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

REPLACEMENT PARTS

A - INK RESERVOIR
B - POINT (PEN)
C - SCREW, ADJUSTMENT
D - NUT, LOCK
E - PIN, TRACER
F - PIN, TAIL

OPTIONAL

SCRIBER ARM WITH THREADED BUSHING

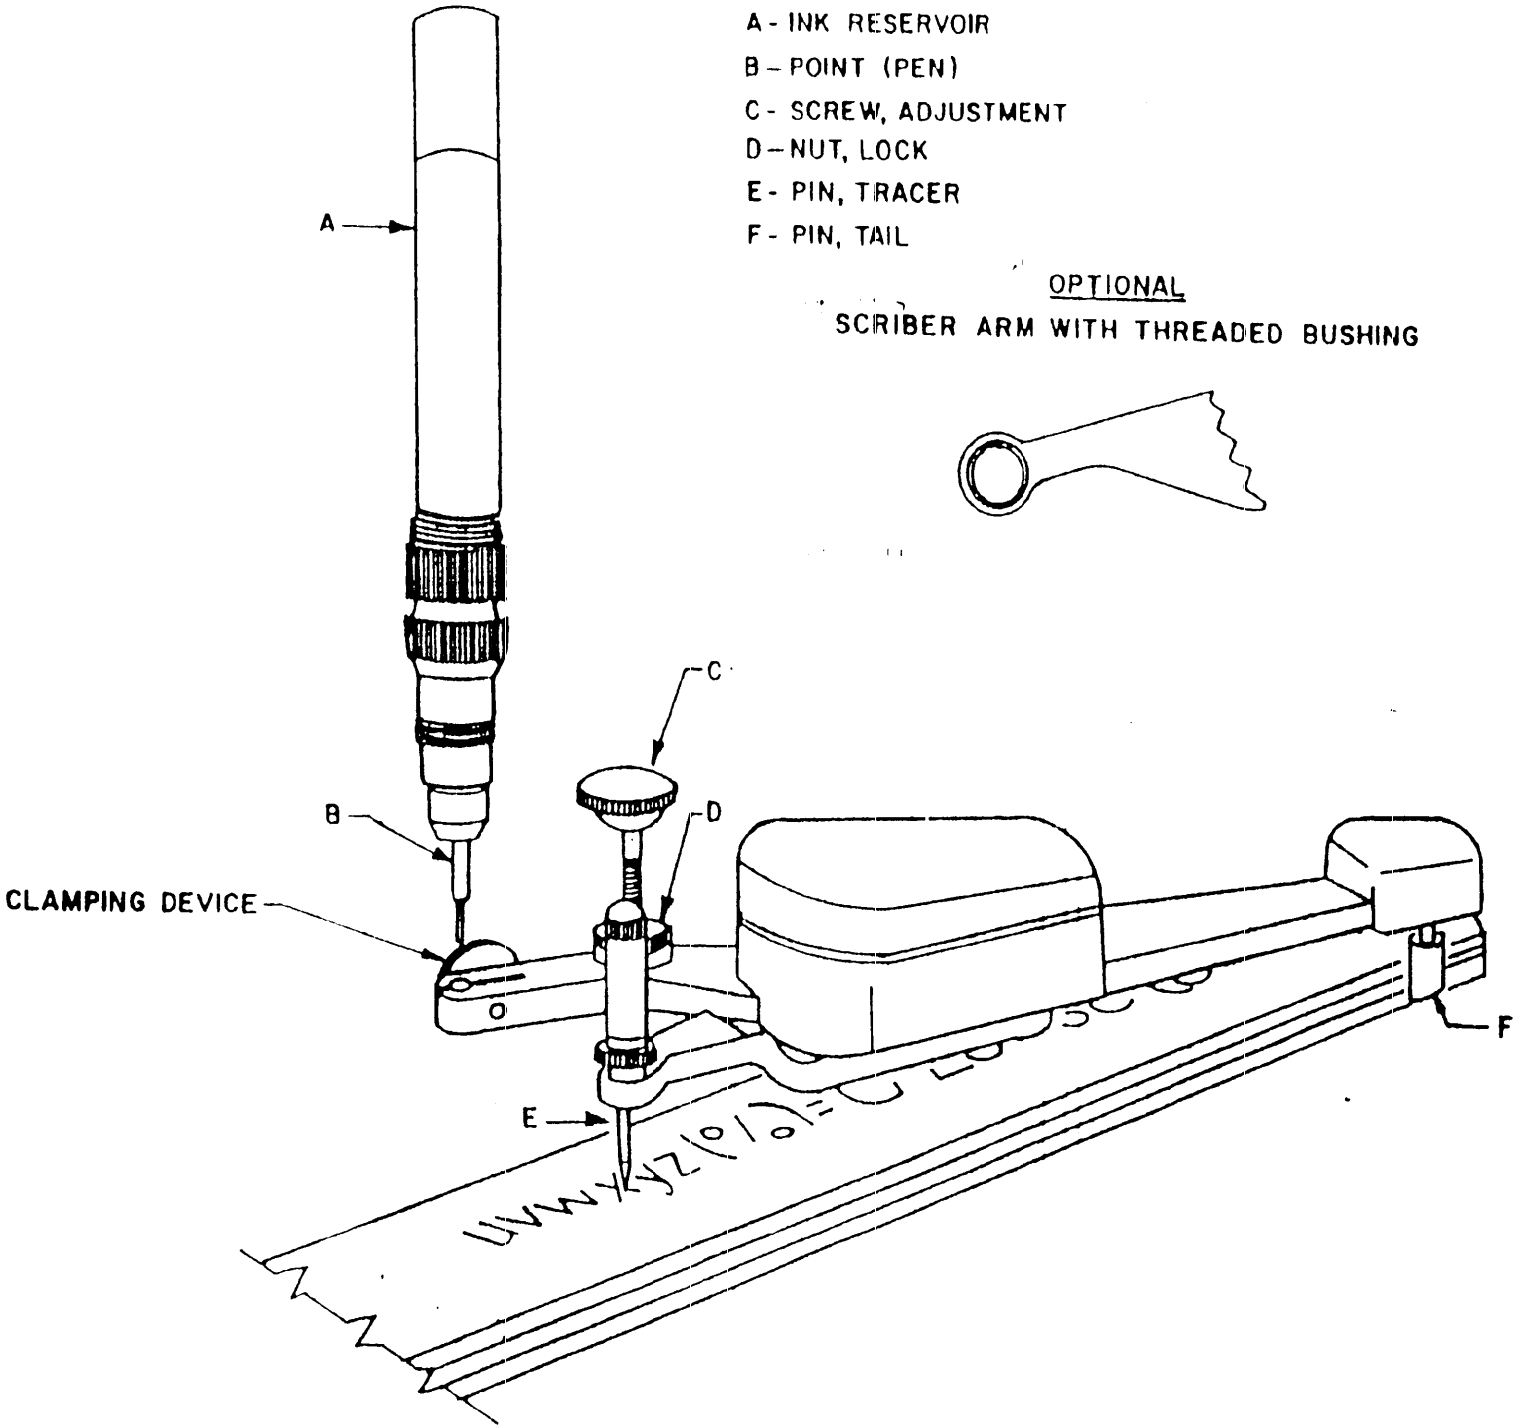


FIGURE 3. Style 2 scriber

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T09:08Z
Check the source to verify that this is the current version before use.



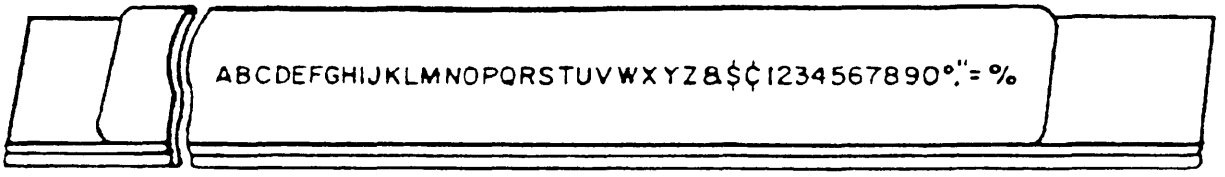



FIGURE 4. Series 3 template and template holder.



Series 2, Class 1 template, vertical letters.

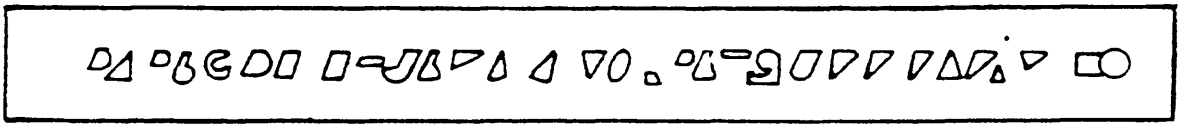

Series 2, Class 2 template, slanting letters.



pen technical

FIGURE 5. Series 2 templates and technical pen.

X-2255B

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.