REVIEW ACTIVITIES: ARMY - MD
NAVY - AS, OS, YD
USER ACTIVITIES: ARMY - ME, PS
NAVY - MD

FED. SUP CLASS
6640

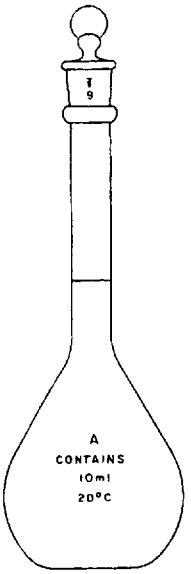

PART NUMBER	CAPACITY (ml)	PENNYHEAD STOPPER NO.	CAPACITY ACCURACY ± TOLERANCE (ml)
MS36068-1	10	9	0.02
MS36068-2	25	9	0.03
MS36068-3	50	9	0.05
MS36068-4	100	13	0.08
MS36068-5	250	16	0.12
MS36068-6	500	16 or 19	0.15
MS36068-7	1000	19 or 22	0.30
MS36068-8	2000	27	0.50

MATERIAL: Borosilicate glass in accordance with Federal Specification DD-G-541, Type I, Class A.

(A) DESIGN: Flasks shall be in accordance with Federal Specification NNN-F-289, Type I, Class A, Grade 2, and shall be calibrated "to contain" at 20°C.

Pennyhead stoppers shall be in accordance with Federal Specification DD-S-750, Type I, Composition 1, Grade A.

Each flask shall be permanently and legibly marked with nominal capacity.

When full or empty flask shall remain in a stable position.

(A) NOTES:

1. Flasks are supplied with stoppers.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
3. For design feature purposes this standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 29 Jun 1960 REVISED (A) 15 Aug 1969

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU	TITLE	MILITARY STANDARD
Other Cust MS, S2	FLASK, VOLUMETRIC	MS36068
PROCUREMENT SPECIFICATION NNN-F-289	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.