
FED. SUP CLASS
2320

INACTIVE FOR NEW DESIGN AFTER 10 FEBRUARY 1989
FOR NEW DESIGN USE MIL-T-62110.

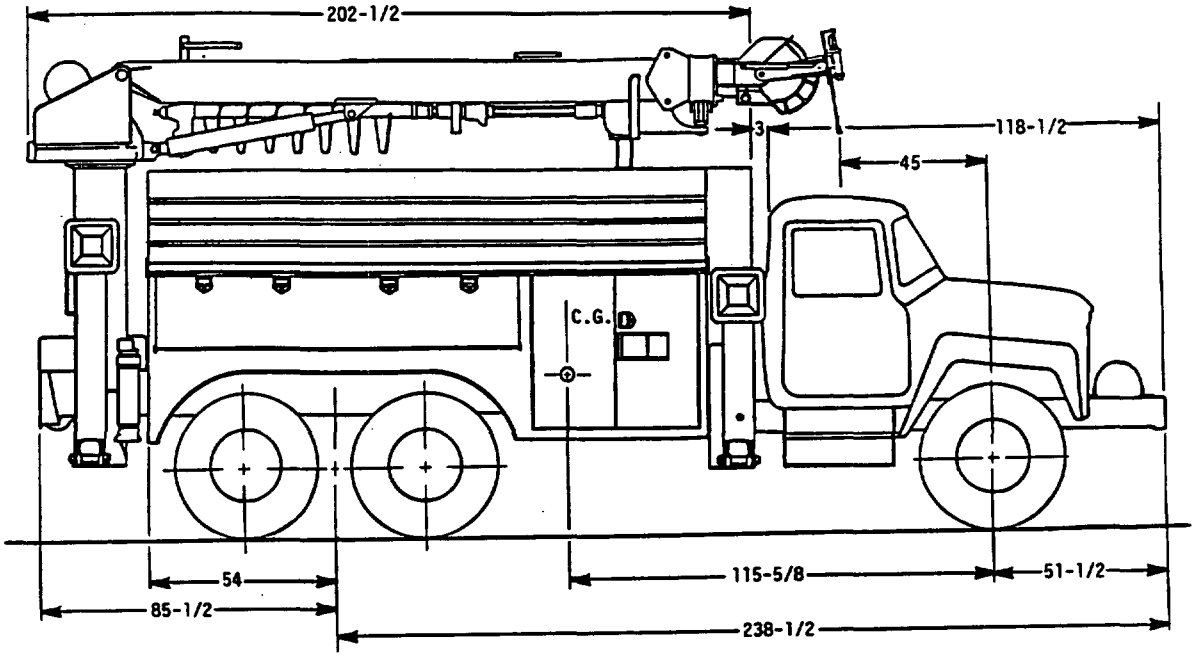

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD AND CREW: 29,040 LBS

GROSS VEHICLE WEIGHT: 36,000 LBS

AXLE LOADS:
FRONT AXLE 9,000 LBS
REAR TANDEM 30,000 LBS

ENGINE: TYPE; 8 CYLINDER, 4 CYCLE, DIESEL,
DISPLACEMENT 548.7 CU IN
BORE & STROKE 4.5 X 4.31
MAX NET TORQUE 346 LB FT @ 2,000 RPM
MAX NET HORSEPOWER 178 @ 3,000 RPM
COMPRESSION RATIO 17:1
FUEL CAPACITY 63 GALLONS

TRANSMISSION: TYPE, 5 SPEED AUTOMATIC W/TORQUE CONVERTER

AXLE RATIO: 5.57:1

BRAKES: TYPE; DUAL AIR SPRING BRAKES WITH ANTILOCK, SIZE FRONT 15 DIA X 4 WIDE, REAR 16-1/2

STEERING: TYPE; INTEGRAL VALVE POWER STEERING

ELECTRICAL SYSTEM: 12V BASIC, 24 V SOLID STATE INVERTER FOR MILITARY TRAILER, BATTERY POTENTIAL 200 AMPS

AXLES: RATING FRONT 9,000 LBS
REAR 30,000 LBS

SUSPENSION: FRONT TYPE; STEEL LEAF H. D, RATING 5250 LBS
REAR TYPE; STEEL LEAF, RATING 17,000 LBS

TIRES: SIZE 8-1/4 X 20, 12 PLY

HYDRAULIC DERRICK: NON-CONTINUOUS 360° ROTATION, RATING 15,000 LBS, TORQUE RATING 37,000 FT LB ELEVATION 80°, EXTENSION 46 FT

HYDRAULIC PUMP: TANDEM, 25 AND 8 GAL, 40 GAL RESERVOIR, CAPACITY 3500 PSI EACH @ 1200 RPM

TURRET WINCH: TYPE; HYDRAULIC, RATING 15,000 LBS, SIZE 9/16 DIA X 6 X 37

OUTRIGGERS: TYPE; HYDRAULIC FOLD OUT, QTY 4

WINCH: TYPE; HYDRAULIC, RATING 15,000 LBS SIZE 18 X 7 NON-ROTATING, 1/2 DIA WIRE

RECOVERY WINCH: TYPE; HYDRAULIC, RATING SIZE 5/8 DIA X 6 X 37 20,000 LBS

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE ON ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

MS PART NO.	ENGINEERING DWG NO.	
MS52196-1	8736878I	WITH WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TELEPHONE MAINTENANCE, TRUCK, 6×4, M876.	MILITARY STANDARD MS52196(AT)
PROCUREMENT SPECIFICATION MIL-T-62225A(AT)	SUPERSEDES:		SHEET I OF I

APPROVED 3 JUL 85 REVISED (A) 10 FEB 1989

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T18:22Z
Check the source to verify that this is the current version before use.