MIL-P- 12035 (ORD)
23 May 1952
SUPERSEDING
Packaging Instruction
AFPS 165 21 April 1945

MILITARY SPECIFICATION

PACKAGING OF TELESCOPE, M86F

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment, and interplant shipment of Telescope, M86F with or without equipment.

Item	Stock No.
Telescope, M86F, W/E	F001-6784696
Consisting of:	
1 Telescope, M86F	F001-7597852
1 Case, Carrying, M76	F235-7692133

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS AND PUBLICATIONS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601	-	Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
NN-B-621	-	Boxes, Wood, Nailed and Lock Corner.
UU-T-111	-	Tape; Paper, Gummed (Kraft).
LLL-B-631	-	Boxes; Fiber, Corrugated (For Domestic Shipment).
LLL-B-636	-	Boxes; Fiber, Solid (For Domestic Shipment).
LLL-F-291	-	Fiberboard; Corrugated, Single Face (Flexible).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

Military

JAN-P-101	-	Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.
JAN-P-108	-	Packaging and Packing for Overseas Shipment - Boxes; Fiberboard (V-Board and W-Board) Exterior and Interior.
MIL-P-116	-	Preservation, Methods of.
JAN-P-125	-	Packaging and Packing for Overseas Shipment - Barrier Materials, Waterproof, Flexible.
JAN-P-127	-	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.
MIL-B-131	-	Barrier Material; Water-Vaporproof, Flexible.
JAN-P-133	-	Packaging and Packing for Overseas Shipment - Boxes, Set-up, Paperboard.
JAN-P-139	-	Packaging and Packing for Overseas Shipment - Plywood, Container Grade.
MIL-A-140	-	Adhesive, Water-Resistant, Waterproof Barrier Material. Case Liner.
MIL-D-3464	-	Desiccants (Activated) In Bags; for Static Dehumidification and Packaging.

Ordnance Department Tentative

AXS-1472	-	Adhesive, Label (Water-Resistant).

STANDARD

MIL-STD-129	-	Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials - The following shall apply wherever packaging materials are referred to in this specification by name only:

Reference	Full Identification
Cellulosic cushioning material	Any type, any class (min. thickness 1/4 inch) of Specification UU-C-843

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

Reference	Full Identification
Desiccant	Class 2 of Specification MIL-D-3464
Flexible single face corrugated fiberboard	Type I or II of Specification LLL-F-291
Flexible waterproof barrier material	Applicable requirements of Specification JAN-P-125
Gummed tape	Grade A or B of Specification UU-T-111
Pressure sensitive tape	Any type and grade of Specification JAN-P-127
Water-resistant adhesive	Applicable requirements of Specification JAN-P-140

3.2 Cleaning

3.2.1 Warning - The optics on this instrument have been cleaned and covered with neutral lens tissue paper before being sent to the packaging section. If the tissue on the optics has become inadvertently unwrapped or damaged, the instrument shall be subjected to further inspection and rewrapping by competent optical personnel.

3.2.2 The carrying case and the exterior surfaces of the telescope shall be cleaned so as to be free from dirt, smudges, fingerprints and foreign substances in accordance with the applicable cleaning method (C-1) of Specification JAN-P-116.

3.3 Packaging

3.3.1 Prepackaging the telescope without equipment

3.3.1.1 The tissue paper covering the optics shall be secured to the telescope with pressure sensitive tape. The tissue covered ends of the telescope shall then be covered with cellulosic cushioning material, which shall be secured to the telescope with pressure sensitive tape (see Figure 1).

3.3.1.2 The eyeshield shall be stuffed with neutral tissue paper and immobilized either in a mailing tube or in a set-up paperboard box conforming to type I or IV, any class and any style of Specification JAN-P-133 (see Figure 1). The ends of the mailing tube shall be covered with either paperboard or metal caps. The box shall be closed by applying gummed tape over the seams.

3.3.1.3 The required units of desiccant shall be secured to each telescope with pressure sensitive tape. The packaged eyeshield shall be secured to the telescope with pressure sensitive tape in such a manner that the bag or bags of desiccant and the packaged eyeshield are on the same side of the telescope.

3.3.1.4 The telescope shall then be wrapped with flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape.

3.3.1.5 The wrapped items shall then be placed in a water-vaporproof bag fabricated from barrier material conforming to Class D of Specification MIL-B-131. The bag shall be heat sealed,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

exhausting entrapped air prior to final closure. The cushioned telescope shall fit snugly in the sealed bag. The bag shall then be wrapped with flexible single face corrugated fiberboard which shall be secured with gummed tape.

3.3.2 Prepackaging the telescope with equipment

3.3.2.1 The neutral lens tissue paper covering the optics shall be secured to the telescope and each tissue covered end of the telescope shall be covered with cellulosic cushioning material and secured as specified in 3.3.1.1.

3.3.2.2 Each prepared telescope shall be placed in its carrying case and the case closed.

3.3.2.3 The required units of desiccant shall then be secured to the case with pressure sensitive tape as shown in Figure 2.

3.3.2.4 The eyeshield shall be packaged as specified in 3.3.1.2 and secured to the case with pressure sensitive tape as shown in Figure 2.

3.3.2.5 The items shall then be wrapped with flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape.

3.3.2.6 The wrapped items shall be placed in a bag which conforms to the bag specified in 3.3.1.5 and sealed in the same manner. The bag shall then be wrapped with flexible single face corrugated fiberboard, which shall be secured with gummed tape.

3.3.3 Unit package - The prepackaged telescope with or without a case shall be immobilized in a fiberboard box conforming to any compliance symbol and any style, except FTC, of Specification JAN-P-108. Each box shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joint, with tape. The adhesive shall conform to Specification JAN-P-101. The seams of a box conforming to compliance symbol V1, V2, V3 or W5s of Specification JAN-P-108 shall be sealed with pressure sensitive tape conforming to type II or III, grade A or B of Specification JAN-P-127, at least 2 inches in width. The seams of other fiberboard boxes under Specification JAN-P-108 shall be sealed with gummed tape.

3.3.4 Water-resistant overwrap - A fiberboard box conforming to compliance symbol W5c, W6c or W6s of Specification JAN-P-108 shall be wrapped with flexible waterproof barrier material conforming to type C-1, C-2 or E-1 of Specification JAN-P-125. Water-resistant adhesive shall be applied over all areas of contact on the seams and between the flaps on the ends. All seams shall be covered with pressure sensitive tape conforming to type II or III, grade A or B of Specification JAN-P-127, at least 2 inches in width.

3.4 Packing

3.4.1 For domestic shipment and storage

3.4.1.1 The shipping container shall conform to either of the following specifications:

NN-B-601, style A or B, type B or C
NN-B-621, style 2 or 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

3.4.1.2 Nailed wood boxes shall be strapped with flat steel straps as required in Specification NN-B-621. Plywood boxes shall be strapped with flat steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled. The gross weight of each box shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 200 pounds.

3.4.2 For overseas shipment

3.4.2.1 The shipping container shall conform to either of the following specifications, utilizing group I or II lumber and flat steel straps:

JAN-P-105, Style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139

JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom, shall be 11/16 inch when the shipment is to be made by an ocean going vessel

3.4.2.2 Quantity of telescopes packed in shipping container - Twelve unit packaged telescopes, with or without carrying cases, shall be packed in the overseas shipping container.

3.4.2.3 Size and weight of packed shipping container - The following inside dimensions, cubage and gross weight are approximate for 12 unit packaged telescopes, with or without cases, packed in a nailed wood box.

Inside dimensions	20" long x 17" wide x 15" deep
Cubage	3.8 cubic feet
Gross weight	68 pounds

3.4.3 Immobilizing - The contents of each shipping container shall be immobilized in such a manner that the contents cannot move about after the container is closed.

3.5 Identification and marking

3.5.1 Unit container and water-resistant overwrap - The identification data required in Standard MIL-STD-129 for interior packages shall be added to each unit container and water-resistant overwrap by printing or marking either directly on the exterior surface or on a label affixed to the exterior surface. The serial number shall be added in the identification data.

3.5.1.1 See 3.5.3 and 3.5.4 for Method II package indication and inspection seals.

3.5.2 Shipping container - In addition to other markings that may be required (see 6.3), the information to be placed on each container shall be in accordance with Standard MIL-STD-129. The identification data shall be stencilled or printed on the container. Packing lists containing the serial numbers of the telescopes in the container are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

Fragile labels shall be affixed to the shipping container.

3.5.2.1 See 3.5.3 and 3.5.4 for Method II package indication and inspection seals.

3.5.3 Method II package indication - Method II labels shall be affixed to at least one side of each unit container and water-resistant overwrap; also, affix Method II labels to the shipping container in accordance with Standard MIL-STD-129.

3.5.4 Official Ordnance Corps Inspection Seal (Escutcheon)- Evidence of inspection shall be shown by either stamping the escutcheon on each box, water-resistant overwrap and shipping container or affixing paper seals to same.

3.5.4.1 Unit container and water-resistant overwrap - If paper seals are used, a seal shall be affixed to each box in such a manner that the seal will be damaged if the box is opened. Two paper seals shall be affixed to each overwrap in such a manner that at least one of the seals will be damaged if the overwrap is removed. If a rubber stamp is used, the escutcheon shall be applied in such a manner that at least a portion of it is on the sealing tape which is used to seal the box and overwrap. The overwrap shall be stamped in two places in such a fashion that at least one of the escutcheons will be damaged if the overwrap is removed.

3.5.4.2 Shipping container - Either a paper seal or a stamped escutcheon shall be placed adjacent to the permanent markings.

3.5.4.3 Application of Ordnance District's symbol - The Ordnance District's symbol, such as NYOD, BOD, etc. shall be added on each paper seal and with each stamped escutcheon.

3.5.5 Coating labels and paper seals - Labels and paper seals (if used) shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.6 Interplant shipment requirements - Where an interplant shipment is involved, the following cleaning, packaging, packing and marking requirements shall apply:

3.6.1 Cleaning - Cleaning shall be in accordance with 3.2.

3.6.2 Packaging - Packaging shall be as specified in 3.3, except as follows:

3.6.2.1 The desiccant, specified in 3.3.1.3 and 3.3.2.3, and the water-vaporproof bag, specified in 3.3.1.5 and 3.3.2.6, may be omitted

3.6.2.2 The flexible single face corrugated fiberboard wrap specified in 3.3.1.5 and 3.3.2.6 shall be omitted.

3.6.2.3 A fiberboard box conforming to Specification LLL-B-631 or LLL-B-636 may be used in lieu of the box specified in 3.3.3. The box shall be closed as specified in 3.3.3 for a W5c or a W6 fiberboard box.

3.6.2.4 The water resistant overwrap specified in 3.3.4 may be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

3.6.3 Packing

3.6.3.1 The shipping container shall conform to one of the following specifications:

NN-B-601	LLL-B-631) Style RSC or OLC
	LLL-B-636) (full overlap)
NN-B-621	

3.6.3.2 Fiberboard boxes shall be closed as specified in 3.3.3 for a W5c or W6 fiberboard box.

3.6.3.3 The gross weight of each shipping container shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 200 pounds.

3.6.3.4 Each fiberboard shipping container shall contain a water-resistant case liner or bag (in which the contents are packed) fabricated from flexible waterproof barrier material. Joints and closures shall be completely sealed with a continuous seam, at least 2 inches wide, of water-resistant adhesive. Inside surfaces of each wood shipping container shall be lined with flexible waterproof barrier material.

3.6.3.5 The contents of each shipping container shall be immobilized as specified in 3.4.3.

3.6.4 Identification and marking - Identification and marking shall be as specified in 3.5, except that the serial number in the identification data on the unit package, the packing list on the shipping container and the Method II labels may be omitted.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Inspection - Inspection shall be made throughout the entire process of packaging and packing.

4.2 Test procedures - The Government reserves the right to use any established commercial method of test, and such additional information deemed necessary to determine compliance with the requirements and intent of this specification.

5. PREPARATION FOR DELIVERY (NOT APPLICABLE)

6. NOTES

6.1 Ordering data - Invitation for bids and contracts or orders should specify the title, number and date of this specification, the type of shipment involved and type of packaging and packing required.


6.2 The marking of overseas shipping containers by Army Installations should be in accordance with Department of the Army and Air Force Manual, SR 746-30-5, "Marking of Oversea Supply."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

NOTICE:- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN:
Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

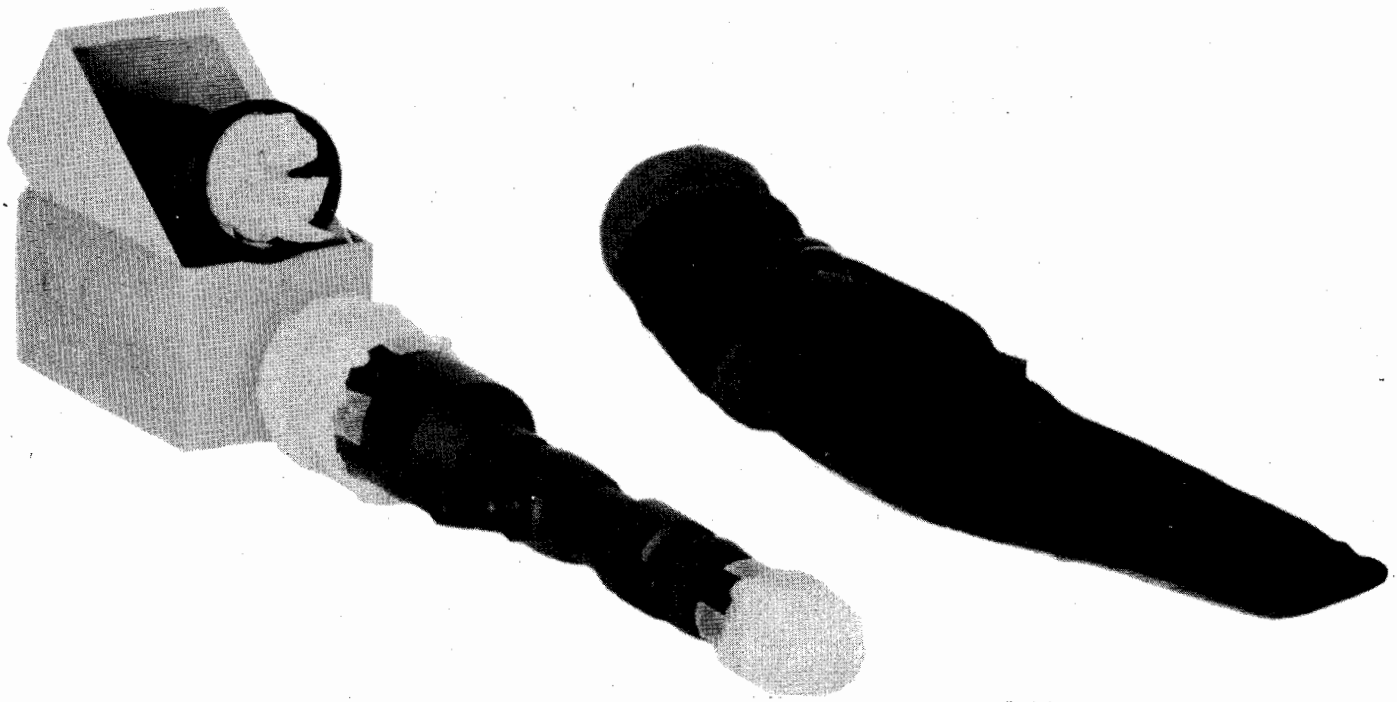


NEG. #22346-1 3/21/52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, M86F, W/E - packaging the eyeshield and covering the optics.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.

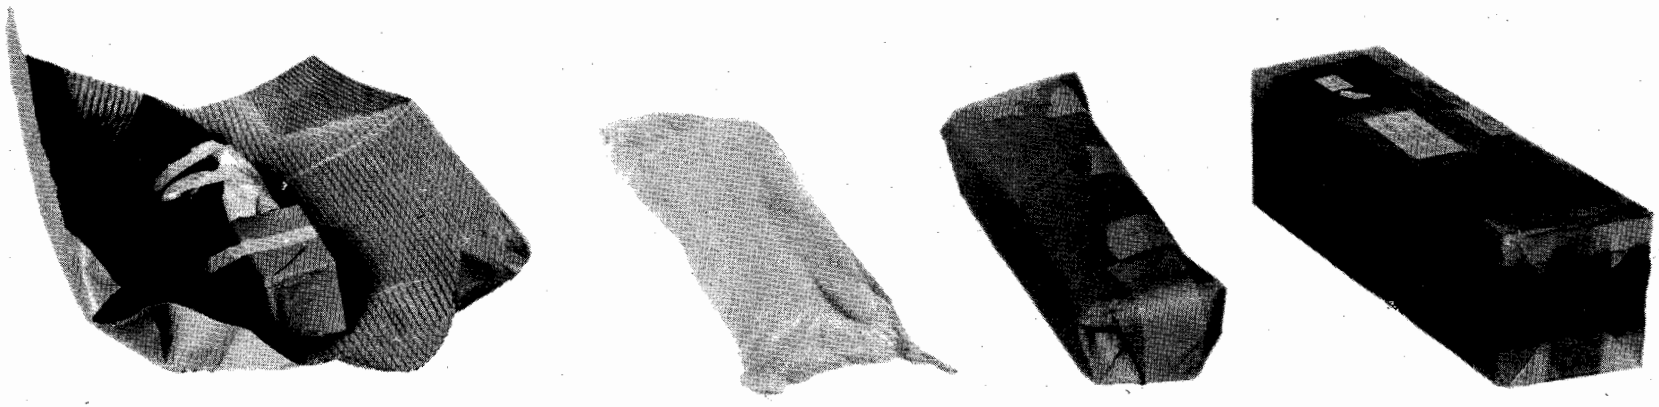

NEG. #22346-2 3/21/52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, M86F, W/E - packaging for telescope with carrying case M78.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:14Z
Check the source to verify that this is the current version before use.