MILITARY STANDARD

MIL-STD-1320-210 (NAVY)

8 OCTOBER 1982

TRUCKLOADING

WALLEYE I GUIDED WEAPON

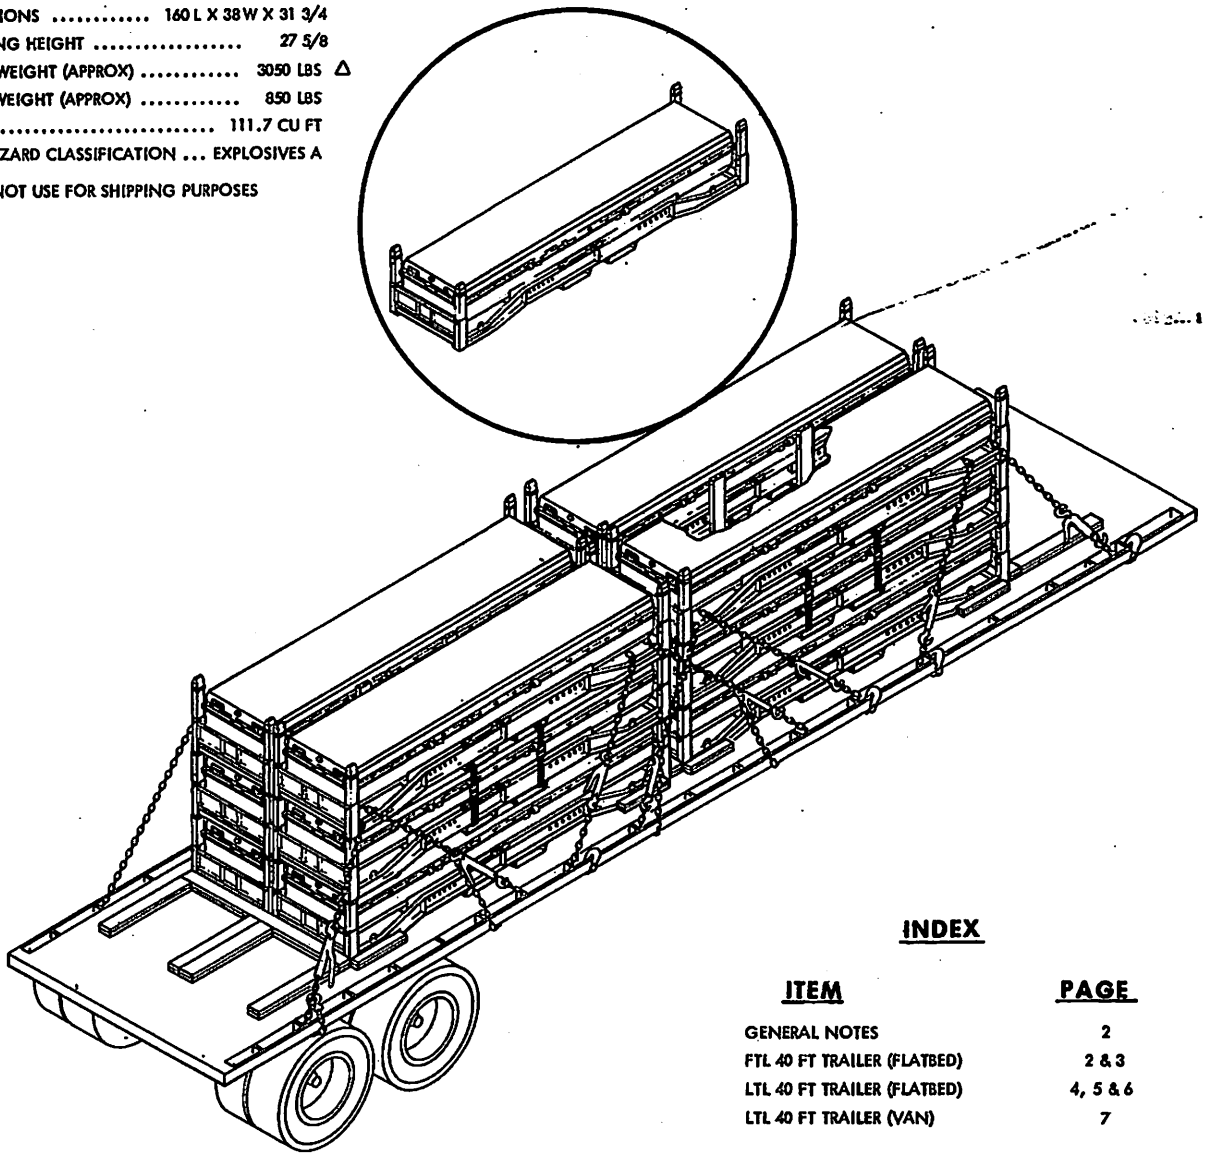
IN SHIPPING AND STORAGE CONTAINER CNU-356/E

CONTAINER DATA

DODIC/NALC E220 E219 E218 E228

DIMENSIONS ..... 160 L X 38 W X 31 3/4
STACKING HEIGHT 27 5/8
GROSS WEIGHT (APPROX) ..... 3050 LBS Δ
EMPTY WEIGHT (APPROX) ..... 850 LBS
CUBE ..... 111.7 CU FT
DOT HAZARD CLASSIFICATION ... EXPLOSIVES A

Δ DO NOT USE FOR SHIPPING PURPOSES



INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER (FLATBED)	2 & 3
LTL 40 FT TRAILER (FLATBED)	4, 5 & 6
LTL 40 FT TRAILER (VAN)	7

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINER-LOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY.

M.S. Gray MWTC 10/7/82
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 10/7/82
SIGNATURE AIRSYSCOM BY DIRECTION DATE

ORIGINATOR Charles McBride 10/7/82
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

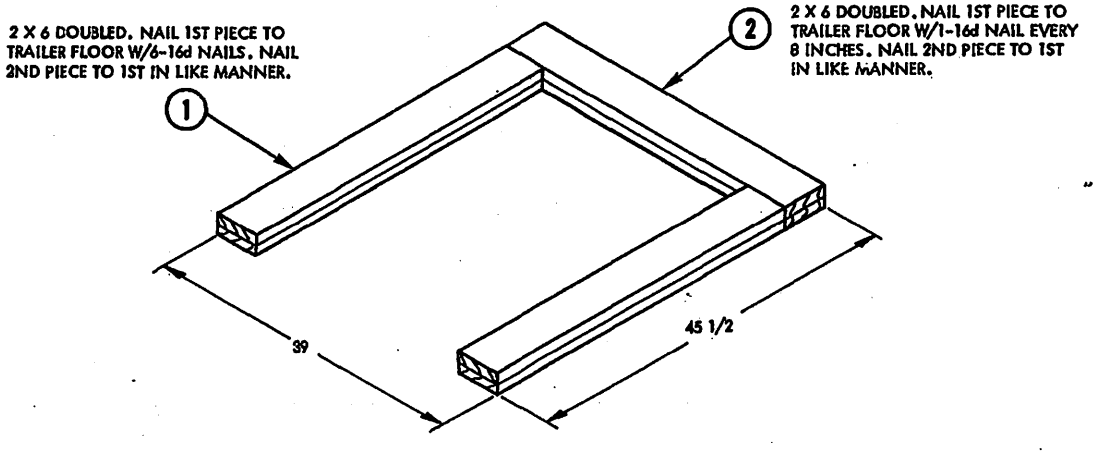
1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE WALLEYE GUIDED WEAPON IN CONTAINER, SHIPPING AND STORAGE CNU-356/E.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS OR 40 FT VAN TRAILERS. THE TRAILER AXLES SHALL BE LOCATED IN THE WESTERN POSITION (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS.
3. EACH STACK OF CONTAINERS TWO OR MORE HIGH IS SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THESE STRAPS PASS THROUGH THE FORK POCKETS OF THE TOP CONTAINERS AND RETURN THROUGH THE FORK POCKETS OF THE CONTAINERS IMMEDIATELY BELOW THE TOP CONTAINER.
4. ONLY CHAINS AND LOAD BINDERS SHALL BE USED FOR TIEDOWNS. (STEEL STRAPS ARE NOT AUTHORIZED). CHAINS, FITTINGS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 AND BE APPLIED AS SHOWN IN THIS DOCUMENT, PAGES 3, 5 AND 7.

NOTE

CHAINS PASS UNDER CONTAINER POD THROUGH THE STACK FROM ONE SIDE OF THE TRAILER TO THE OTHER.

5. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVWEPS OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626, ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
6. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
7. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
8. UNLESS OTHERWISE SPECIFIED MATERIALS SHALL BE IN ACCORDANCE WITH THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
9. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320.


FTL 40 FT TRAILER (FLATBED)



DETAIL A


END BLOCKING
(4 REQUIRED)

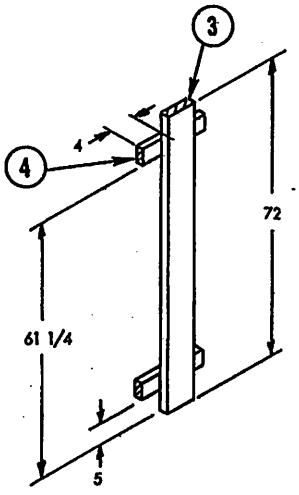Source: https://assist.dla.mil -- Downloaded: 2026-01-23 23:47Z
Check the source to verify that this is the current version before use.



DETAIL B

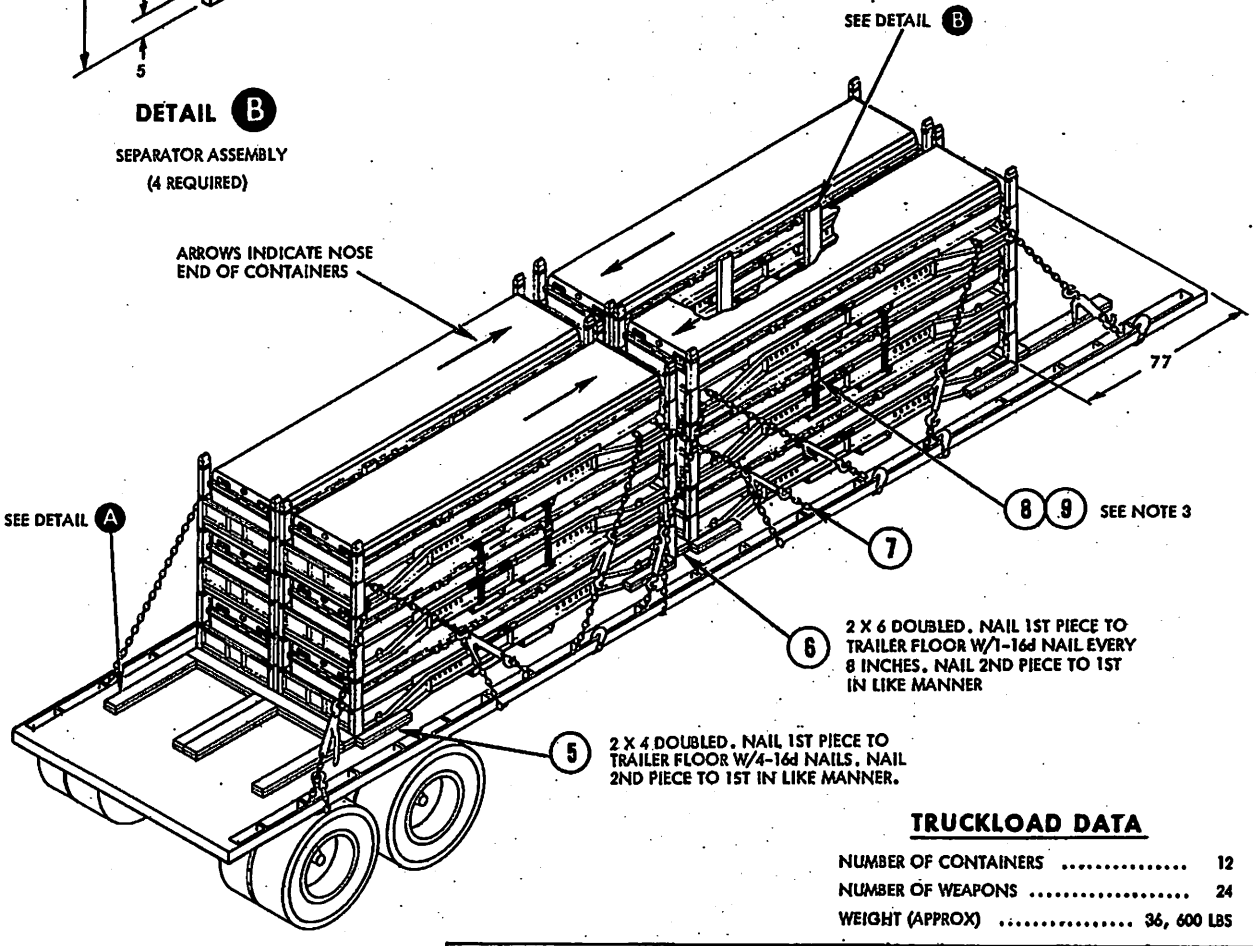SEPARATOR ASSEMBLY
(4 REQUIRED)



TRUCKLOAD DATA

NUMBER OF CONTAINERS 12
NUMBER OF WEAPONS 24
WEIGHT (APPROX) ..... 36, 600 LBS

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	MAT'L/DWG
9	SEAL	FOR 1 1/4 STRAP	8	SEE GENERAL NOTE 3
8	CROSS STRAP	1 1/4 X .035 X 17 FT	4	SEE GENERAL NOTE 3
7	CHAIN & LOAD BINDER	5/16 OR 3/8	8	SEE GENERAL NOTE 4
6	CENTER CROSSMEMBER	2 X 6 X 78	2	SEE FIELD NOTE
5	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE
4	CROSS PIECE	2 X 4 X 14	8	SEE DETAIL B
3	UPRIGHT	2 X 6 X 72	4	SEE DETAIL B
2	BACKUP CLEAT	2 X 6 X 40	16	SEE DETAIL A
1	CROSSMEMBER	2 X 6 X 39	8	SEE DETAIL A

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (FLATBED)












1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I.
2. POSITION CONTAINERS ON TRAILER AS SHOWN IN TABLE, BLOCK AND TIEDOWN LADING USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT, MIL-STD-1320.

NOTE


STACKS OF 4 AND 5 CONTAINERS REQUIRE 3 TIEDOWNS.
STACKS OF 3 OR LESS CONTAINERS REQUIRE 2 TIEDOWNS.

3. WHEN CONTAINERS IN A STACK ARE HIGHER ON ONE SIDE OF THE STACK AS SHOWN IN LOAD PLANS 7, 9 AND 11 CONTAINERS, THE TOP CONTAINER ON THE HIGH SIDE SHALL BE BOLTED TO THE LOWER CONTAINER (4 PLACES) AS SHOWN IN DETAIL D.
4. THE LTL PLAN SHOWN ON PAGE 5 IS THE CORRECT LESS-THAN-TRUCKLOAD FOR THE QUANTITY OF CONTAINERS SHOWN. THIS DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY, SINCE LTL SHIPMENTS MAY CONSIST OF A GREATER OR LESSER NUMBER OF CONTAINERS.

TABLE I


NO. OF CONTAINERS	LOAD PATTERN * → FWD
11	
10	
9	
8	
7	
6	
5	
4	
3	
2	
1	

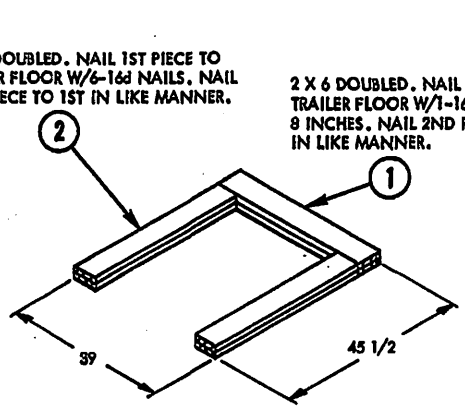* NUMBER IN RECTANGLE INDICATES NUMBER OF CONTAINERS IN A LAYER. ARROWS INDICATE NOSE END OF CONTAINER.



DETAIL C

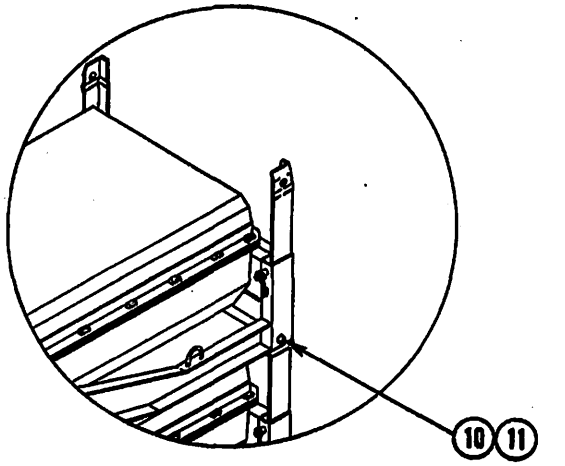
END BLOCKING
4 REQUIRED ON PAGE 5
3 REQUIRED ON PAGE 6



SEE LTL NOTE 3


DETAIL D

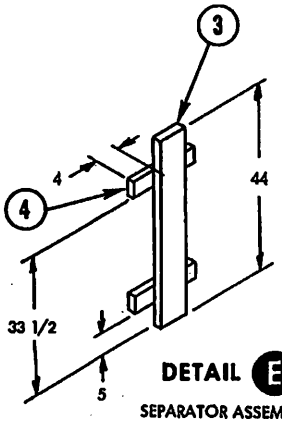Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.



DETAIL E

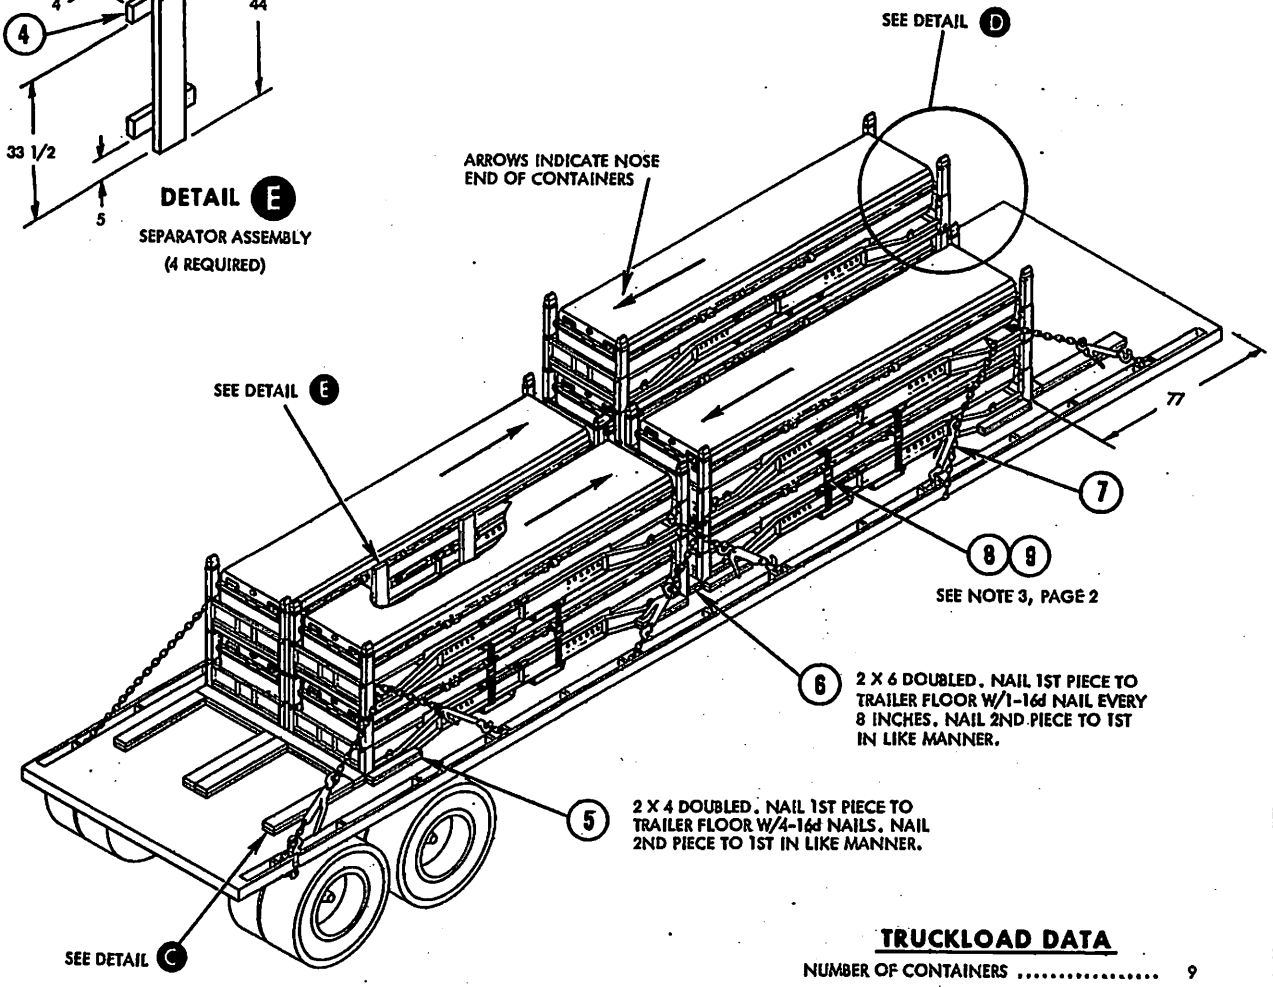SEPARATOR ASSEMBLY
(4 REQUIRED)




TRUCKLOAD DATA

NUMBER OF CONTAINERS 9
NUMBER OF WEAPONS 18
WEIGHT (APPROX) ..... 27,450 LBS.

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	MAT'L/DWG.
11	SELF LOCKING NUT	7/16-14 UNC	4	SEE DETAIL D
10	BOLT	7/16-14 UNC X 2 1/2	4	SEE DETAIL D
9	SEAL	FOR 1 1/4 STRAP	8	SEE GENERAL NOTE 3
8	CROSS STRAP	1 1/4 X.035 X 17 FT	4	SEE GENERAL NOTE 3
7	CHAIN & LOAD BINDER	5/16 OR 3/8	6	SEE GENERAL NOTE 4
6	CENTER CROSSMEMBER	2 X 6 X 78	2	SEE FIELD NOTE
5	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE
4	CROSS PIECE	2 X 4 X 14	8	SEE DETAIL E
3	UPRIGHT	2 X 6 X 44	4	SEE DETAIL E
2	BACKUP CLEAT	2 X 6 X 40	16	SEE DETAIL C
1	CROSSMEMBER	2 X 6 X 39	8	SEE DETAIL C

LIST OF MATERIALS AND NAILING DATA

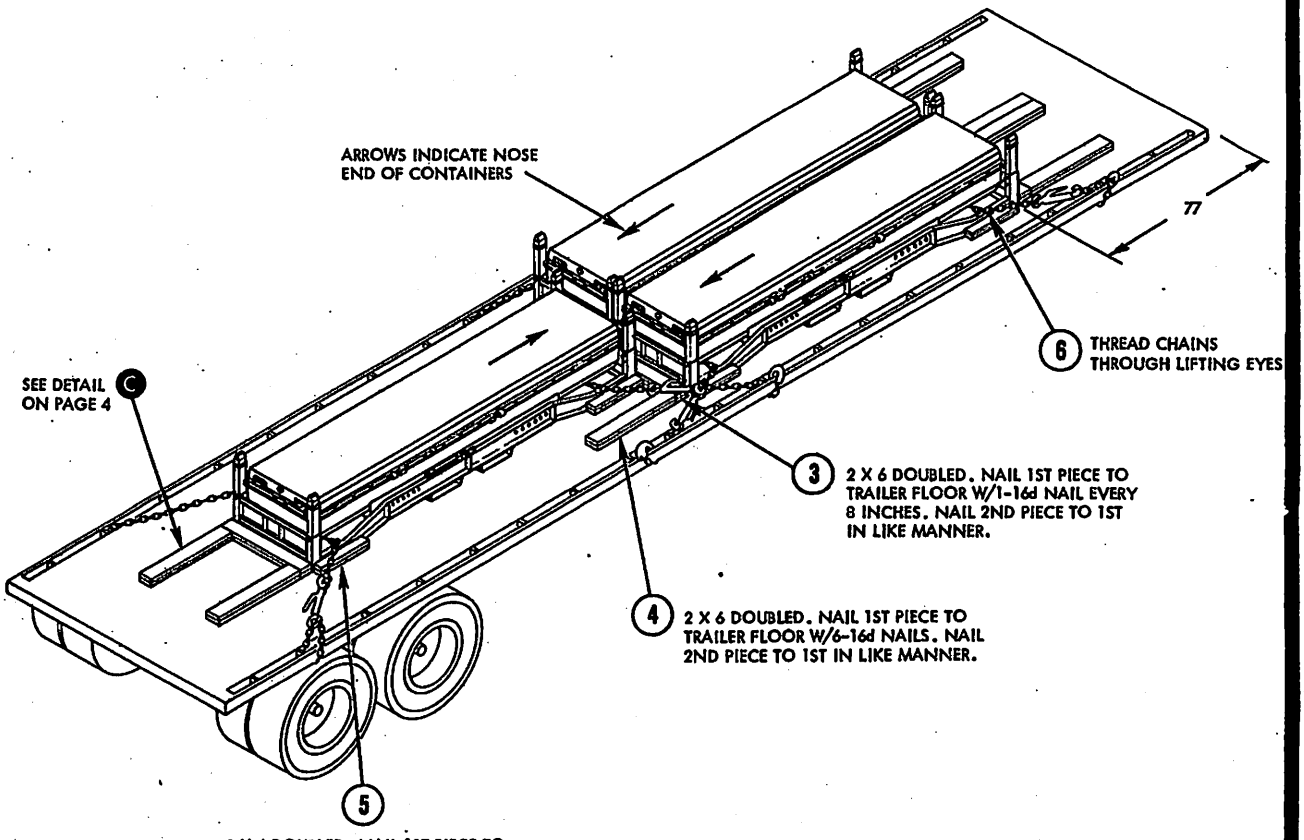Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.



TRUCKLOAD DATA

NUMBER OF CONTAINERS 3
NUMBER OF WEAPONS 6
WEIGHT (APPROX) ..... 9,150 LBS.

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	MAT'L/DWG.
6	CHAIN & LOAD BINDER	5/16 OR 3/8	4	SEE GENERAL NOTE 4
5	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE
4	BACKUP CLEAT	2 X 6 X 40	4	SEE FIELD NOTE
3	CENTER CROSSMEMBER	2 X 6 X 78	2	SEE FIELD NOTE
2	BACKUP CLEAT	2 X 6 X 40	12	SEE DETAIL C
1	CROSSMEMBER	2 X 6 X 39	6	SEE DETAIL C

LIST OF MATERIALS AND NAILING DATA

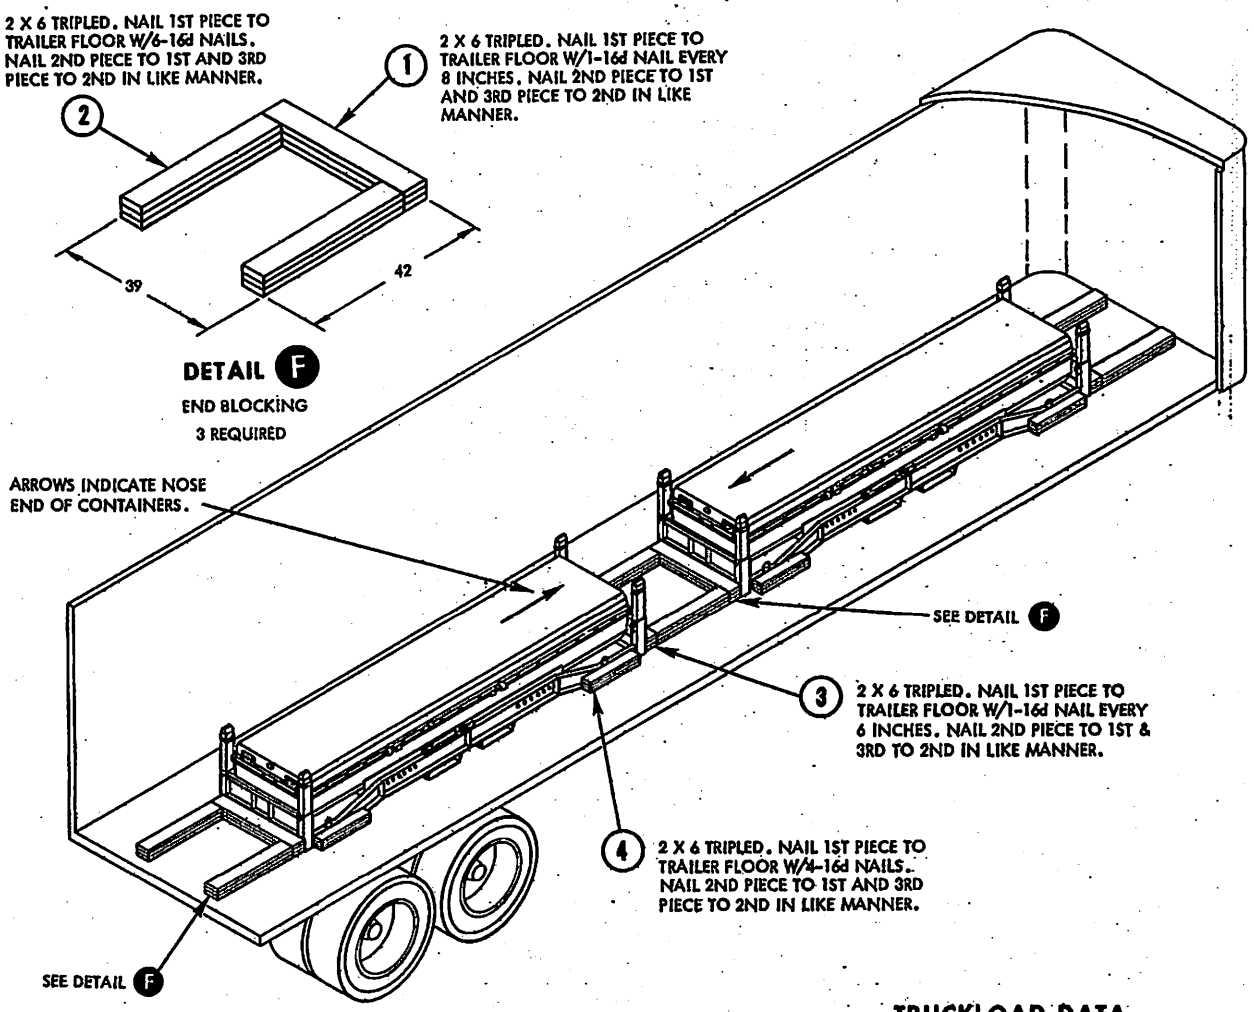
LTL 40 FT TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (VAN)

SEE **WARNING** BELOW

1. WHEN REQUIRED TO SHIP WALLEYE WEAPONS IN THE CNU-356/E CONTAINERS BY VAN, THE PRINCIPLES OF THIS DOCUMENT SHALL BE FOLLOWED.
2. THE CONTAINERS ARE END HANDLED WITH THE MK 45 HANDLIFT TRUCK.



TRUCKLOAD DATA

NUMBER OF CONTAINERS 2
NUMBER OF WEAPONS 4
WEIGHT (APPROX) ..... 6,100 LBS.

WARNING

SHIPMENT IN VANS IS AUTHORIZED ONLY WHEN FLATBED EQUIPMENT IS NOT AVAILABLE AND MILITARY NECESSITY DICTATES THAT SHIPMENT SHALL BE MADE. AUTHORIZATION TO USE VANS SHALL BE OBTAINED FROM COGNIZANT AUTHORITY PRIOR TO LOADING.

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	MAT'L/DWG.
4	SLEEPER	2 X 6 X 24	24	SEE FIELD NOTE
3	INTERMEDIATE CROSSMEMBER	2 X 6 X 39	3	SEE FIELD NOTE
2	BACKUP CLEAT	2 X 6 X 36 1/2	18	SEE DETAIL F
1	CROSSMEMBER	2 X 6 X 39	9	SEE DETAIL F

LIST OF MATERIALS AND NAILING DATA

LTL 40 FT TRAILER (VAN)

REVIEW ACTIVITIES:
NAVY - OS, AS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N555)

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:47Z
Check the source to verify that this is the current version before use.