FED SUP CLASS
5306

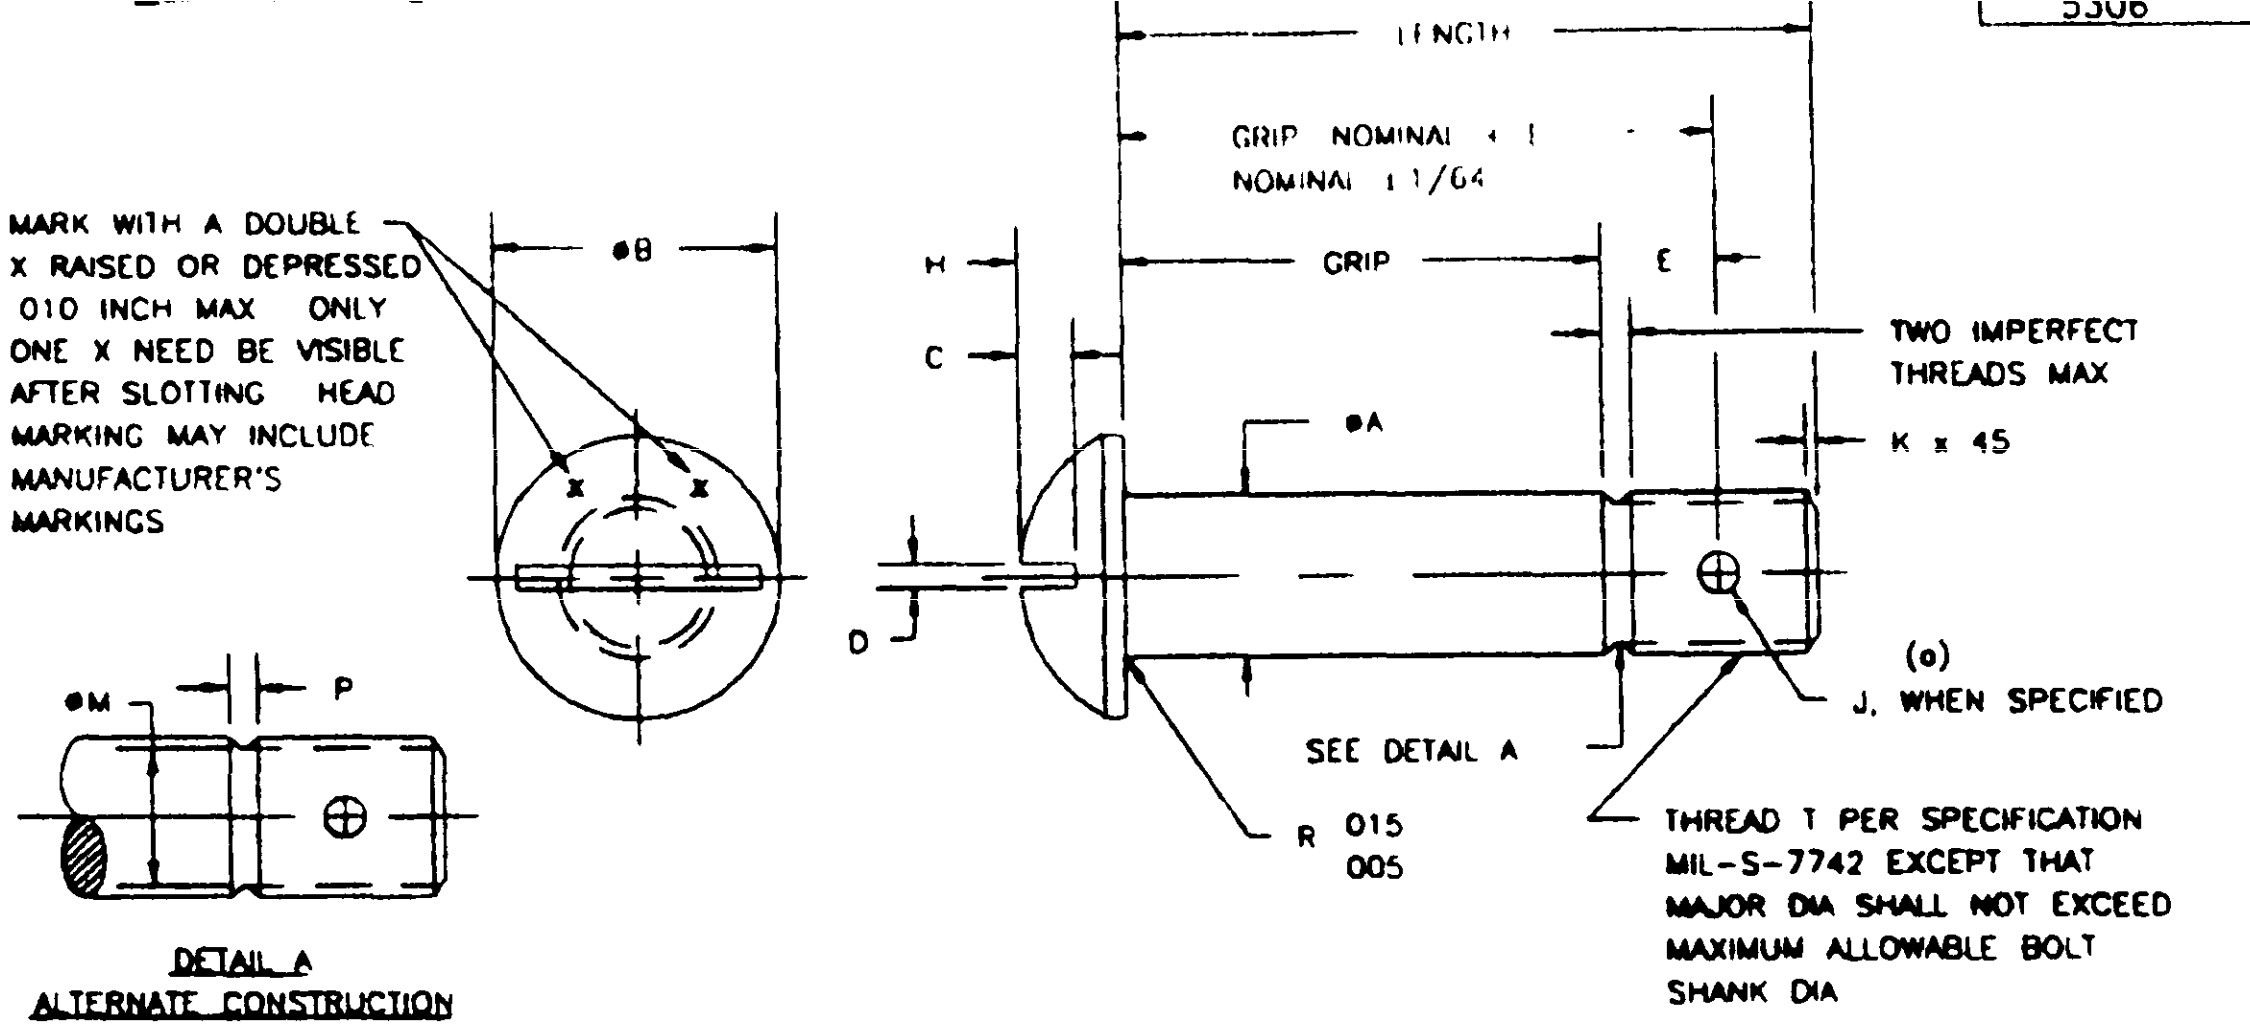

MARK WITH A DOUBLE X RAISED OR DEPRESSED 010 INCH MAX ONLY ONE X NEED BE VISIBLE AFTER SLOTTING HEAD MARKING MAY INCLUDE MANUFACTURER'S MARKINGS

THREAD T PER SPECIFICATION MIL-S-7742 EXCEPT THAT MAJOR DIA SHALL NOT EXCEED MAXIMUM ALLOWABLE BOLT SHANK DIA

DETAIL A
ALTERNATE CONSTRUCTION

⑪

BASIC AN PART NO	THREAD T ⑪	⌀A + 000 - 002	⌀B	C	D	E REF	H	⌀J DRILL + 010 -.000	K + 016	⌀M + 005	P	RATED STRENGTH, POUNDS	
												SINGLE SHEAR AT FULL DIA	(b) TENSILE
AN21	NO 6-40UNF-3A	.136	5/16	3/64	1/32	5/32	5/64	.038	031	100	1/32	1,060	510
AN22	NO 8-36UNF-3A	162	3/8	1/16	3/64	5/32	3/32	070	031	120	1/32	1,500	760
AN23	NO 10-32UNF-3A	186	3/8	1/16	3/64	3/16	3/32	070	031	141	3/64	2,125	1,105
AN24	1/4 -28UNF-3A	.248	1/2	3/32	1/16	3/16	1/8	076	.031	196	3/64	3,680	2,040
AN25	5/16-24UNF-3A	311	5/8	7/64	5/64	3/16	5/32	076	047	250	1/16	5,750	3,250
AN26	3/8 -24UNF-3A	.373	11/16	9/64	3/32	7/32	3/16	106	047	.313	1/16	8,280	5,050
AN27	7/16-20UNF-3A	436	13/16	5/32	3/32	7/32	7/32	106	.047	.360	1/16	11,250	6,800
AN28	1/2 -20UNF-3A	497	7/8	11/64	7/64	1/4	1/4	106	047	422	1/16	14,700	9,250
AN29	9/16-18UNF-3A	.560	1	3/16	7/64	5/16	9/32	141	.062	482	5/64	18,700	11,800
AN30	5/8 -18UNF-3A	.622	1-1/8	3/16	1/8	5/16	5/16	141	062	.545	5/64	23,000	15,050
AN32	3/4 -16UNF-3A	747	1-5/16	13/64	9/64	3/8	3/8	141	062	660	3/32	33,150	22,000
AN34	7/8 -14UNF-3A	.871	1-1/2	7/32	5/32	7/16	7/16	141	078	773	3/32	45,050	30,000
(d) ~~AN36~~	~~1 -14 NF-3A~~	~~.996~~	~~1-3/4~~	~~15/64~~	~~11/64~~	~~1/2~~	~~1/2~~	~~141~~	~~078~~	~~898~~	~~3/32~~	~~58,900~~	~~40,350~~
AN37	1 -12UNF-3A	996	1-3/4	15/16	11/64	1/2	1/2	141	078	898	3/32	58,900	40,350

(a) COTTER PIN HOLE CENTERLINE SHALL BE WITHIN .010 INCH OF BOLT CENTER LINE FOR 5/16 DIAMETER BOLTS AND SMALLER, AND WITHIN 015 INCH FOR 3/8 DIAMETER BOLTS AND LARGER COTTER PIN HOLE TO BE NORMAL TO BOLT CENTERLINE WITHIN 2°

(b) RATED TENSILE STRENGTHS APPLICABLE ONLY WHEN SHEAR NUT AN320 OR THIN NUT AN364 IS USED

(c) GRIP LENGTH OF BOLTS SHALL BE MEASURED FROM THE UNDERSIDE OF THE HEAD TO THE END OF THE FULL CYLINDRICAL PORTION OF THE SHANK

(d) 1-14 NF-3 THREAD PITCH INACTIVE FOR DESIGN AFTER 15 JUNE 1966

⑪ REQUIREMENTS

1. MATERIAL. NON-CORROSION RESISTING STEEL, 4130 (UNS G41300) PER MIL-S-6758 OR 8740 (UNS G87400) PER MIL-S-6049
2. FINISH. CADMIUM PLATE, SPECIFICATION QQ-P-416 TYPE II, CLASS 2
3. ADD A AFTER DASH NUMBER FOR BOLT WITHOUT COTTER PIN HOLE
4. EXAMPLES OF PART NUMBERS. AN21-14 = NO 6 BOLT, 29/32 INCH LONG, WITH COTTER PIN HOLE
   AN21-14A = NO 6 BOLT, 29/32 INCH LONG, WITHOUT COTTER PIN HOLE
5. POSITION OF SLOT IN HEAD RELATIVE TO COTTER PIN HOLE OPTIONAL

NOTES

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES DECIMALS ± 010 FRACTIONS ± 1/64 ANGLES ± 5°
2. BOLTS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE COUNTERSINKING OF DRILLED HOLES IS OPTIONAL
3. LENGTHS LONGER THAN THOSE TABULATED ON SHEETS 2 AND 3 ARE AVAILABLE IN 1/8 INCH INCREMENTS BY USE OF OF SIGNIFICANT DASH NUMBERS
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE
5. UNLESS OTHERWISE SPECIFIED ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

⑪ DENOTES CHANGE(S)

P A   D A   S

Other Cust
ARMY   AV
Air FORCE   99

PROCUREMENT SPECIFICATION
MIL-B-6812

AIR FORCE - NAVY AERONAUTICAL STANDARD

BOLT   CLEVIS

SUPERSEDES FORMER ANA STANDARD AND AIR FORCE AND NAVY STANDARD ISSUES OF AN21 THRU AN37

AN21 THRU AN37

SHEET 1 OF 3

REVIEWER SYMBOLS

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown

AMSC N/A

APPROVED 16 NOV 42   REVISED ④ 23 Dec 52   ⑤ 15 Jun 66   ⑥ 29 May 69   ⑦ 25 May 83   ⑧ 8 Apr 95   ⑨ 20 Jul 95   ⑩ 10 Nov 95   ⑪ 22 Mar 96

REVIEWER SYMBOLS

FED SUP CLASS
5306

DASH NO	AN21		AN22		AN23		AN24		AN25		AN26		AN27	
	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH
5	1/16	11/32	1/16	11/32										
6	1/8	13/32	1/8	13/32										
7	3/16	15/32	3/16	15/32										
8	1/4	17/32	1/4	17/32	3/16	17/32	3/16	17/32						
9	5/16	19/32	5/16	19/32	1/4	19/32	1/4	19/32	1/4	39/64	1/4	39/64		
10	3/8	21/32	3/8	21/32	5/16	21/32	5/16	21/32	5/16	43/64	5/16	43/64		
11	7/16	23/32	7/16	23/32	3/8	23/32	3/8	23/32	3/8	47/64	3/8	47/64		
12	1/2	25/32	1/2	25/32	7/16	25/32	7/16	25/32	7/16	51/64	7/16	51/64	3/8	51/64
13	9/16	27/32	9/16	27/32	1/2	27/32	1/2	27/32	1/2	55/64	1/2	55/64	7/16	55/64
14	5/8	29/32	5/8	29/32	9/16	29/32	9/16	29/32	9/16	59/64	9/16	59/64	1/2	59/64
15	11/16	31/32	11/16	31/32	5/8	31/32	5/8	31/32	5/8	63/64	5/8	63/64	9/16	63/64
16	3/4	1- 1/32	3/4	1- 1/32	11/16	1- 1/32	11/16	1- 1/32	11/16	1- 3/64	11/16	1- 3/64	5/8	1- 3/64
17	13/16	1- 3/32	13/16	1- 3/32	3/4	1- 3/32	3/4	1- 3/32	3/4	1- 7/64	3/4	1- 7/64	11/16	1- 7/64
18	7/8	1- 5/32	7/8	1- 5/32	13/16	1- 5/32	13/16	1- 5/32	13/16	1-11/64	13/16	1-11/64	3/4	1-11/64
19	15/16	1- 7/32	15/16	1- 7/32	7/8	1- 7/32	7/8	1- 7/32	7/8	1-15/64	7/8	1-15/64	13/16	1-15/64
20	1	1- 9/32	1	1- 9/32	15/16	1- 9/32	15/16	1- 9/32	15/16	1-19/64	15/16	1-19/64	7/8	1-19/64
21	1- 1/16	1-11/32	1- 1/16	1-11/32	1	1-11/32	1	1-11/32	1	1-23/64	1	1-23/64	15/16	1-23/64
22	1- 1/8	1-13/32	1 1/8	1-13/32	1- 1/16	1-13/32	1- 1/16	1-13/32	1- 1/16	1-27/64	1- 1/16	1-27/64	1	1-27/64
23	1- 3/16	1-15/32	1- 3/16	1-15/32	1- 1/8	1-15/32	1- 1/8	1-15/32	1- 1/8	1-31/64	1- 1/8	1-31/64	1- 1/16	1-31/64
24	1- 1/4	1-17/32	1- 1/4	1-17/32	1- 3/16	1-17/32	1- 3/16	1-17/32	1- 3/16	1-35/64	1- 3/16	1-35/64	1- 1/8	1-35/64
25	1- 5/16	1-19/32	1- 5/16	1-19/32	1- 1/4	1-19/32	1- 1/4	1-19/32	1- 1/4	1-39/64	1- 1/4	1-39/64	1- 3/16	1-39/64
26	1- 3/8	1-21/32	1- 3/8	1-21/32	1- 5/16	1-21/32	1- 5/16	1-21/32	1- 5/16	1-43/64	1- 5/16	1-43/64	1- 1/4	1-43/64
27	1- 7/16	1-23/32	1- 7/16	1-23/32	1- 3/8	1-23/32	1- 3/8	1-23/32	1- 3/8	1-47/64	1- 3/8	1-47/64	1- 5/16	1-47/64
28	1- 1/2	1-25/32	1- 1/2	1-25/32	1- 7/16	1-25/32	1- 7/16	1-25/32	1- 7/16	1-51/64	1- 7/16	1-51/64	1- 3/8	1-51/64
29	1- 9/16	1-27/32	1- 9/16	1-27/32	1- 1/2	1-27/32	1- 1/2	1-27/32	1- 1/2	1-55/64	1- 1/2	1-55/64	1- 7/16	1-55/64
30	1- 5/8	1-29/32	1- 5/8	1-29/32	1- 9/16	1-29/32	1- 9/16	1-29/32	1- 9/16	1-59/64	1- 9/16	1-59/64	1- 1/2	1-59/64
31	1-11/16	1-31/32	1-11/16	1-31/32	1- 5/8	1-31/32	1- 5/8	1-31/32	1- 5/8	1-63/64	1- 5/8	1-63/64	1- 9/16	1-63/64
32	1- 3/4	2- 1/32	1- 3/4	2- 1/32	1-11/16	2- 1/32	1-11/16	2- 1/32	1-11/16	2- 3/64	1-11/16	2- 3/64	1- 5/8	2- 3/64
34					1-13/16	2- 5/32	1-13/16	2- 5/32	1-13/16	2-11/64	1-13/16	2-11/64	1- 3/4	2-11/64
36					1-15/16	2- 9/32	1-15/16	2- 9/32	1-15/16	2-19/64	1-15/16	2-19/64	1- 7/8	2-19/64
38					2- 1/16	2-13/32	2- 1/16	2-13/32	2- 1/16	2-27/64	2- 1/16	2-27/64	2	2-27/64
40					2- 3/16	2-17/32	2- 3/16	2-17/32	2- 3/16	2-35/64	2- 3/16	2-35/64	2- 1/8	2-35/64
42					2- 5/16	2-21/32	2- 5/16	2-21/32	2- 5/16	2-43/64	2- 5/16	2-43/64	2- 1/4	2-43/64
44					2- 7/16	2-25/32	2- 7/16	2-25/32	2- 7/16	2-51/64	2- 7/16	2-51/64	2- 3/8	2-51/64
46					2- 9/16	2-29/32	2- 9/16	2-29/32	2- 9/16	2-59/64	2- 9/16	2-59/64	2- 1/2	2-59/64
48					2-11/16	3- 1/32	2-11/16	3- 1/32	2-11/16	3- 3/64	2-11/16	3- 3/64	2- 5/8	3- 3/64
50					2-13/16	3- 5/32	2-13/16	3- 5/32	2-13/16	3-11/64	2-13/16	3-11/64	2- 3/4	3-11/64
52					2-15/16	3- 9/32	2-15/16	3- 9/32	2-15/16	3-19/64	2-15/16	3-19/64	2- 7/8	3-19/64
54					3- 1/16	3-13/32	3- 1/16	3-13/32	3- 1/16	3-27/64	3- 1/16	3-27/64	3	3-27/64
56					3- 3/16	3-17/32	3- 3/16	3-17/32	3- 3/16	3-35/64	3- 3/16	3-35/64	3- 1/8	3-35/64
58					3- 5/16	3-21/32	3- 5/16	3-21/32	3- 5/16	3-43/64	3- 5/16	3-43/64	3- 1/4	3-43/64
60					3- 7/16	3-25/32	3- 7/16	3-25/32	3- 7/16	3-51/64	3- 7/16	3-51/64	3- 3/8	3-51/64
62					3- 9/16	3-29/32	3- 9/16	3-29/32	3- 9/16	3-59/64	3- 9/16	3-59/64	3- 1/2	3-59/64
64					3-11/16	4- 1/32	3-11/16	4- 1/32	3-11/16	4- 3/64	3-11/16	4- 3/64	3- 5/8	4- 3/64
66							3-13/16	4- 5/32					3- 3/4	4-11/64
68							3-15/16	4- 9/32					3- 7/8	4-19/64
70							4- 1/16	4-13/32					4	4-27/64
72							4- 3/16	4-17/32					4- 1/8	4-35/64
74							4- 5/16	4-21/32					4- 1/4	4-43/64
76							4- 7/16	4-25/32					4- 3/8	4-51/64
78							4- 9/16	4-29/32					4- 1/2	4-59/64
80							4-11/16	5- 1/32					4- 5/8	5- 3/64
82							4-13/16	5- 5/32					4- 3/4	5-11/64
84							4-15/16	5- 9/32					4- 7/8	5-19/64
86													5	5-27/64
88													5- 1/8	5-35/64
90													5- 1/4	5-43/64
92													5- 3/8	5-51/64

APPROVED 16 NOV 42 REVISED ④ 23 Dec 52 ⑤ 15 Jun 66 ⑥ 29 May 69 ⑦ 25 May 83 ⑧ 8 Apr 95 ⑨ 20 Jul 95 ⑩ 10 Nov 95 ⑪ 22 Mar 96

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto

Other Cust
ARMY - AT
AIR FORCE - 99

PROCUREMENT SPECIFICATION

AIR FORCE – NAVY AERONAUTICAL STANDARD

BOLT – CLEVIS

SUPERSEDES: STANDARD ISSUES OF AN21 THRU AN36

AN21 THRU AN37

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5306-1930

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS LIMITED

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes or antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown

AMSC N/A

FED SUP CLASS
5306

⑪

DASH NO	AN28		AN29		AN30		AN32		AN34		AN36		AN37	
	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH	GRIP	LENGTH
12	3/8	51/64												
13	7/16	55/64												
14	1/2	59/64	7/16	15/16	7/16	15/16								
15	9/16	63/64	1/2	1	1/2	1								
16	5/8	1- 3/64	9/16	1- 1/16	9/16	1- 1/16	1/2	1- 1/16						
17	11/16	1- 7/64	5/8	1- 1/8	5/8	1- 1/8	9/16	1- 1/8						
18	3/4	1-11/64	11/16	1- 3/16	11/16	1- 3/16	5/8	1- 3/16	9/16	1-13/64				
19	13/16	1-15/64	3/4	1- 1/4	3/4	1- 1/4	11/16	1- 1/4	5/8	1-17/64				
20	7/8	1-19/64	13/16	1- 5/16	13/16	1- 5/16	3/4	1- 5/16	11/16	1-21/64	5/8	1-21/64	5/8	1-21/64
21	15/16	1-23/64	7/8	1- 3/8	7/8	1- 3/8	13/16	1- 3/8	3/4	1-25/64	11/16	1-25/64	11/16	1-25/64
22	1	1-27/64	15/16	1- 7/16	15/16	1- 7/16	7/8	1- 7/16	13/16	1-29/64	3/4	1-29/64	3/4	1-29/64
23	1- 1/16	1-31/64	1	1- 1/2	1	1- 1/2	15/16	1- 1/2	7/8	1-33/64	13/16	1-33/64	13/16	1-33/64
24	1- 1/8	1-35/64	1- 1/16	1- 9/16	1- 1/16	1- 9/16	1	1- 9/16	15/16	1-37/64	7/8	1-37/64	7/8	1-37/64
25	1- 3/16	1-39/64	1- 1/8	1- 5/8	1- 1/8	1- 5/8	1- 1/16	1- 5/8	1	1-41/64	15/16	1-41/64	15/16	1-41/64
26	1- 1/4	1-43/64	1- 3/16	1-11/16	1- 3/16	1-11/16	1- 1/8	1-11/16	1- 1/16	1-45/64	1	1-45/64	1	1-45/64
27	1- 5/16	1-47/64	1- 1/4	1- 3/4	1- 1/4	1- 3/4	1- 3/16	1- 3/4	1- 1/8	1-49/64	1- 1/16	1-49/64	1- 1/16	1-49/64
28	1- 3/8	1-51/64	1- 5/16	1-13/16	1- 5/16	1-13/16	1- 1/4	1-13/16	1- 3/16	1-53/64	1- 1/8	1-53/64	1- 1/8	1-53/64
29	1- 7/16	1-55/64	1- 3/8	1- 7/8	1- 3/8	1- 7/8	1- 5/16	1- 7/8	1- 1/4	1-57/64	1- 3/16	1-57/64	1- 3/16	1-57/64
30	1- 1/2	1-59/64	1- 7/16	1-15/16	1- 7/16	1-15/16	1- 3/8	1-15/16	1- 5/16	1-61/64	1- 1/4	1-61/64	1- 1/4	1-61/64
31	1- 9/16	1-63/64	1- 1/2	2	1- 1/2	2	1- 7/16	2	1- 3/8	2- 1/64	1- 5/16	2- 1/64	1- 5/16	2- 1/64
32	1- 5/8	2- 3/64	1- 9/16	2- 1/16	1- 9/16	2- 1/16	1- 1/2	2- 1/16	1- 7/16	2- 5/64	1- 3/8	2- 5/64	1- 3/8	2- 5/64
34	1- 3/4	2-11/64	1-11/16	2- 3/16	1-11/16	2- 3/16	1- 5/8	2- 3/16	1- 9/16	2-13/64	1- 1/2	2-13/64	1- 1/2	2-13/64
36	1- 7/8	2-19/64	1-13/16	2- 5/16	1-13/16	2- 5/16	1- 3/4	2- 5/16	1-11/16	2-21/64	1- 5/8	2-21/64	1- 5/8	2-21/64
38	2	2-27/64	1-15/16	2- 7/16	1-15/16	2- 7/16	1- 7/8	2- 7/16	1-13/16	2-29/64	1- 3/4	2-29/64	1- 3/4	2-29/64
40	2- 1/8	2-35/64	2- 1/16	2- 9/16	2- 1/16	2- 9/16	2	2- 9/16	1-15/16	2-37/64	1- 7/8	2-37/64	1- 7/8	2-37/64
42	2- 1/4	2-43/64	2- 3/16	2-11/16	2- 3/16	2-11/16	2- 1/8	2-11/16	2- 1/16	2-45/64	2	2-45/64	2	2-45/64
44	2- 3/8	2-51/64	2- 5/16	2-13/16	2- 5/16	2-13/16	2- 1/4	2-13/16	2- 3/16	2-53/64	2- 1/8	2-53/64	2- 1/8	2-53/64
46	2- 1/2	2-59/64	2- 7/16	2-15/16	2- 7/16	2-15/16	2- 3/8	2-15/16	2- 5/16	2-61/64	2- 1/4	2-61/64	2- 1/4	2-61/64
48	2- 5/8	3- 3/64	2- 9/16	3- 1/16	2- 9/16	3- 1/16	2- 1/2	3- 1/16	2- 7/16	3- 5/64	2- 3/8	3- 5/64	2- 3/8	3- 5/64
50	2- 3/4	3-11/64	2-11/16	3- 3/16	2-11/16	3- 3/16	2- 5/8	3- 3/16	2- 9/16	3-13/64	3 1/2	3-13/64	3- 1/2	3-13/64
52	2- 7/8	3-19/64	2-13/16	3- 5/16	2-13/16	3- 5/16	2- 3/4	3- 5/16	2-11/16	3-21/64	2- 5/8	3-21/64	2- 5/8	3-21/64
54	3	3-27/64	2-15/16	3- 7/16	2-15/16	3- 7/16	2- 7/8	3- 7/16	2-13/16	3-29/64	2- 3/4	3-29/64	2- 3/4	3-29/64
56	3- 1/8	3-35/64	3- 1/16	3- 9/16	3- 1/16	3- 9/16	3	3- 9/16	2-15/16	3-37/64	2- 7/8	3-37/64	2- 7/8	3-37/64
58	3- 1/4	3-43/64	3- 3/16	3-11/16	3- 3/16	3-11/16	3- 1/8	3-11/16	3- 1/16	3-45/64	3	3-45/64	3	3-45/64
60	3- 3/8	3-51/64	3- 5/16	3-13/16	3- 5/16	3-13/16	3- 1/4	3-13/16	3- 3/16	3-53/64	3- 1/8	3-53/64	3- 1/8	3-53/64
62	3- 1/2	3-59/64	3- 7/16	3-15/16	3- 7/16	3-15/16	3- 3/8	3-15/16	3- 5/16	3-61/64	3- 1/4	3-61/64	3- 1/4	3-61/64
64	3- 5/8	4- 3/64	3- 9/16	4- 1/16	3- 9/16	4- 1/16	3- 1/2	4- 1/16	3- 7/16	4- 5/64	3- 3/8	4- 5/64	3- 3/8	4- 5/64
66	3- 3/4	4-11/64	3-11/16	4- 3/16	3-11/16	4- 3/16	3- 5/8	4- 3/16	3- 9/16	4-13/64	3- 1/2	4-13/64	3- 1/2	4-13/64
68	3- 7/8	4-19/64	3-13/16	4- 5/16	3-13/16	4- 5/16	3- 3/4	4- 5/16	3-11/16	4-21/64	3- 5/8	4-21/64	3- 5/8	4-21/64
70	4	4-27/64	3-15/16	4- 7/16	3-15/16	4- 7/16	3- 7/8	4- 7/16	3-13/16	4-29/64	3- 3/4	4-29/64	3- 3/4	4-29/64
72	4- 1/8	4-35/64	4- 1/16	4- 9/16	4- 1/16	4- 9/16	4	4- 9/16	3-15/16	4-37/64	3- 7/8	4-37/64	3- 7/8	4-37/64
74	4- 1/4	4-43/64	4- 3/16	4-11/16	4- 3/16	4-11/16	4- 1/8	4-11/16	4- 1/16	4-45/64	4	4-45/64	4	4-45/64
76	4- 3/8	4-51/64	4- 5/16	4-13/16	4- 5/16	4-13/16	4- 1/4	4-13/16	4- 3/16	4-53/64	4- 1/8	4-53/64	4- 1/8	4-53/64
78	4- 1/2	4-59/64	4- 7/16	4-15/16	4- 7/16	4-15/16	4- 3/8	4-15/16	4- 5/16	4-61/64	4- 1/4	4-61/64	4- 1/4	4-61/64
80	4- 5/8	5- 3/64	4- 9/16	5- 1/16	4- 9/16	5- 1/16	4- 1/2	5- 1/16	4- 7/16	5- 5/64	4- 3/8	5- 5/64	4- 3/8	5- 5/64
82	4- 3/4	5-11/64					4- 5/8	5- 3/16	4- 9/16	5-13/64	4- 1/2	5-13/64	4- 1/2	5-13/64
84	4- 7/8	5-19/64					4- 3/4	5- 5/16	4-11/16	5-21/64	4- 5/8	5-21/64	4- 5/8	5-21/64
86	5	5-27/64					4- 7/8	5- 7/16	4-13/16	5-29/64	4- 3/4	5-29/64	4- 3/4	5-29/64
88	5- 1/8	5-35/64					5	5- 9/16	4-15/16	5-37/64	4- 7/8	5-37/64	4- 7/8	5-37/64
90	5- 1/4	5-43/64					5- 1/8	5-11/16	5- 1/16	5-45/64	5	5-45/64	5	5-45/64
92							5- 1/4	5-13/16	5- 3/16	5-53/64	5- 1/8	5-53/64	5- 1/8	5-53/64
94							5- 3/8	5-15/16	5- 5/16	5-61/64	5- 1/4	5-61/64	5- 1/4	5-61/64
96									5- 7/16	6- 5/64	5- 3/8	6- 5/64	5- 3/8	6- 5/64
98									5- 9/16	6-13/64	5- 1/2	6-13/64	5- 1/2	6-13/64
100									5-11/16	6-21/64	5- 5/8	6-21/64	5- 5/8	6-21/64
102									5-13/16	6-29/64	5- 3/4	6-29/64	5- 3/4	6-29/64
104									5-15/16	6-37/64	5- 7/8	6-37/64	5- 7/8	6-37/64
106									6- 1/16	6-45/64	6	6-45/64	6	6-45/64
108									6- 3/16	6-53/64	6- 1/8	6-53/64	6- 1/8	6-53/64
110											6- 1/4	6-61/64	6- 1/4	6-61/64
112											6- 3/8	7- 5/64	6- 3/8	7- 5/64

APPROVED 5 NOV 42 REVISED ④ 23 Dec 52 ⑤ 15 Jun 66 ⑥ 29 May 69 ⑦ 25 May 83 ⑧ 8 Apr 95 ⑨ 20 Jul 95 ⑩ 10 Nov 95 ⑪ 22 Mar 95

PA DLA IS

Other Cust
ARMY AV
AIR FORCE 99

PROCUREMENT SPECIFICATION

AIR FORCE NAVY AERONAUTICAL STANDARD

BOLT CLEVIS

FORMER ANA STANDARD AND AIR FORCE AND NA STANDARD ISSUES ON AN21 THRU AN36

AN21 THRU AN37

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5306-1930

REVIEWER SYMBOLS

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished or in any way supplied the said drawings specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown

AV ;C N/A