[INCH-POUND]
A-A-55492A
April 14, 1997
SUPERSEDING
A-A-55492
February 3, 1995

COMMERCIAL ITEM DESCRIPTION

FUSE CARTRIDGE, SEMICONDUCTOR TYPE, 130 VOLTS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for 130 volt semiconductor type fuse cartridges. Fuse cartridges covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 6.1).

AA55492 - 001

AA55492: CID number
001: Dash number (see table I)

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuse cartridges supplied to this CID shall be as specified herein (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 130 V ac maximum.

3.4 Short circuit interrupt rating. The short circuit interrupt shall be 100,000 amperes root mean square (RMS) symmetrical.

3.5 Maximum current clearing I^2t. The maximum current clearing I^2t shall be as specified in table I.

3.6 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).


3.7 Marking. Fuse cartridges supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

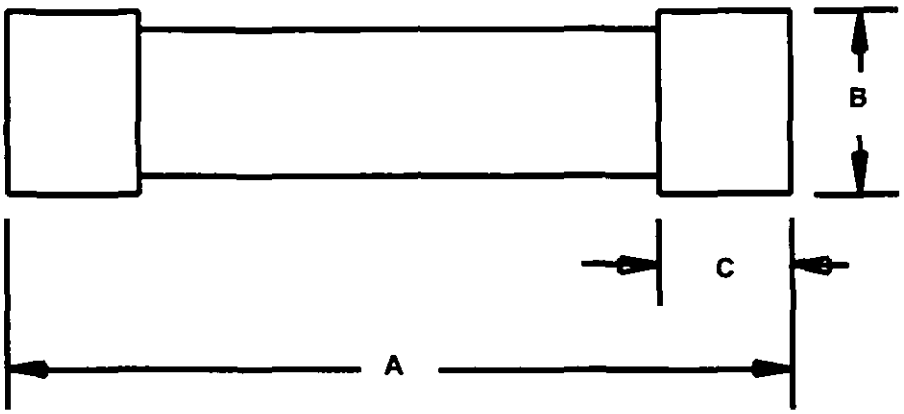

AA55492-	Dimensions		
	A	B	C
001 through 006	38.10 (1.500)	10.31 (.406)	9.50 (.374)
007 through 011	50.80 (2.000)	20.60 (.811)	16.03 (.631) 12.57 (.495)


Configuration I

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:49Z
Check the source to verify that this is the current version before use.

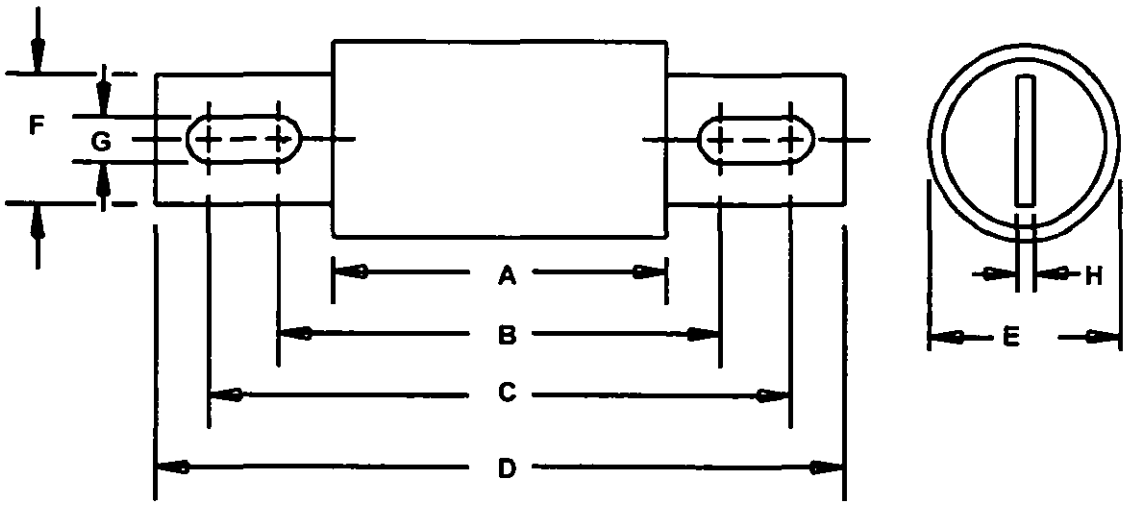

AA55492-	Dimensions							
	A	B	C	D	E	F	G	H
012 through 021	29.38 (1.157)	48.01 (1.890)	55.73 (2.194) 54.64 (2.151)	67.48 (2.657)	28.71 (1.130) 25.27 (.995)	22.36 (.880) 18.92 (.745)	8.43 (.332) 7.77 (.306)	4.78 (.188)

Configuration II

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 2. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55492-	Ampere rating	I^2t (A^2s)	AA55492-	Ampere rating	I^2t (A^2s)
001	5	7	012	70	19,000
002	10	12	013	80	30,000
003	15	37	014	100	41,000
004	20	95	015	125	55,000
005	25	170	016	150	63,000
006	30	300	017	200	80,000
007	35	400	018	250	110,000
008	40	600	019	300	190,000
009	45	800	020	350	280,000
010	50	1,100	021	400	325,000
011	60	1,500			

4. QUALITY ASSURANCE PROVISIONS.

4.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

4.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

5. PACKAGING.

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these semiconductor fuses to DSCC under the Military Parts control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:49Z
Check the source to verify that this is the currentversion before use.

6.3 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

6.4 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
067U2	Den Mar Transit Industrial Fuses 10488 S. W. 211 Street Miami, FL 33189-3000 (305) 235-1000
12092	Carbone Lorraine, Incorporated 14 Eastmans Road Parsippany, NJ 07054-3703 (201) 428-8400
71400	Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 (314) 394-2877
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

6.5 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I)	Vendor commercial P/N 1/			
AA55492-	CAGE 067U2	CAGE 12092	CAGE 71400	CAGE 75915
001	UFR13X005	A015F005	—	L13S5
002	UFR13X010	A015F010	—	L13S10
003	UFR13X015	A015F015	—	L13S15
004	UFR13X020	A015F020	—	L13S20
005	UFR13X025	A015F025	—	L13S25
006	UFR13X030	A015F030	—	L13S30
007	UFR13X035	A015F035	—	L13S35
008	UFR13X040	A015F040	—	L13S40
009	UFR13X045	A015F045	—	L13S45
010	UFR13X050	A015F050	—	L13S50
011	UFR13X060	A015F060	—	L13S60
012	UFR13X070	A015R070	—	L13S70
013	UFR13X080	A015R080	—	L13S80
014	UFR13X100	A015R100	—	L13S100
015	UFR13X125	A015R125	KAA 125	L13S125
016	UFR13X150	A015R150	KAA 150	L13S150
017	UFR13X200	A015R200	KAA 200	L13S200
018	UFR13X250	A015R250	KAA 250	L13S250
019	UFR13X300	A015R300	KAA 300	L13S300
020	UFR13X350	A015R350	KAA 350	L13S350
021	UFR13X400	A015R400	KAA 400	L13S400

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

6.6 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CM, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7884.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-0546

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.