[INCH-POUND]
A-A-55517/2
21 February 1997

COMMERCIAL ITEM DESCRIPTION

RESISTOR, FIXED, CARBON FILM, 1/4 WATT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a 1/4 watt carbon film resistor. The resistors covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) (see 6.1). The PIN shall be AA5551702****. Complete PIN example: AA5551702153G.

AA55517	02	***	*
Abbreviated CID number	Applicable CID sheet (two digits)	Resistance	Tolerance

3. SALIENT CHARACTERISTICS

3.1 Power rating. The power rating for the resistor shall be 1/4 watt.

3.2 Voltage rating. The voltage rating shall be 250 V.

3.3 Overload voltage. The overload voltage shall be 500 V.

3.4 Resistance range. The resistance range shall be 1.0 ohm to 22 megohms.

3.5 Resistance tolerance. The standard resistance tolerance available is J (±5 percent). G (±2 percent) and K (±10 percent)are also available.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, 3990 East Broad Street, Columbus, OH 43216-5000, telephone (614)692-0553, or facsimile (FAX) (614)692-6939.

AMSC N/A
FSC 5905


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:50Z
Check the source to verify that this is the current version before use.

3.6 Operating ambient temperature. The operating ambient temperature shall be -55°C to +155°C.

3.7 Configuration and dimensions. The resistors supplied to this CID shall be as specified herein (see figure 1).

3.8 Marking. The resistors supplied to this CID shall be marked as specified in A-A-55517.

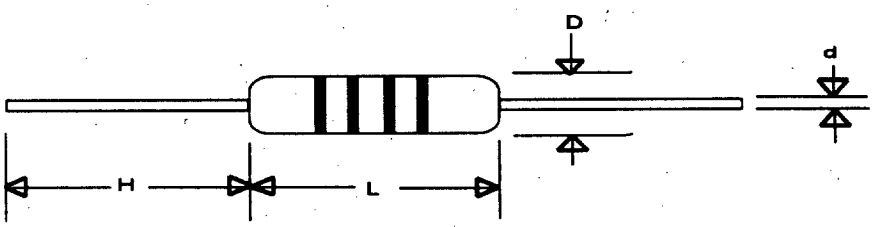

Dimension			
L	D	H	d
.250 ±.032 (6.35 ±.81)	.095 ±.025 (2.41 ±.64)	.788 min. (20.02 min)	.024 ±.003 (.61 ±.08)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given in parenthesis for general information only.
3. The picturization of the style above is given as a representative of the envelope item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.

Figure 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:50Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55517.

5. PACKAGING.

5.1 Preservation, packing, and marking. Preservation, packaging, and marking shall be as specified in A-A-55517.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See 2 section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of document.

Commercial Item Description

A-A-55517 - Resistor, Fixed, Carbon Film, 1/4 Watt.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

6.4 Government users. To acquire information on obtaining these resistors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CP, 3990 East Broad Street, Columbus, OH 43216-5000, or telephone (614) 692-7684.

6.5 Ordering data. Ordering data shall be as specified in A-A-55517.

6.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time if CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:50Z
Check the source to verify that this is the current version before use.

Commercial Item Description (CID)	Vendor CAGE	Vendor name and address
AA5551702****	07SM5	PACCOM Electronics 3928 148 th Ave. NE Redmond, WA 98502
AA5551702****	08KU4	RF Electronics, Inc. 1091 Duryea Ave. Irvine, CA 92614-5517
AA55517021****	56637	RCD Components, Inc. 520 East Industrial Park Dr. Manchester, NH 03109

6.7 Part number (P/N) supersession data. This CID supersedes the following manufacturer's P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

MFGR's CAGE	MFGR's p/n 1/
07SM5	RD25
08KU4	CR25
56637	CF25Z

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

MILITARY INTERESTS:

Custodian

Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5905-D351-02

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:50Z
Check the source to verify that this is the current version before use.