INCH-POUND

A-A-52138
December 15, 1993

COMMERCIAL ITEM DESCRIPTION

VEGETABLE PEELING MACHINE, ELECTRIC

The General Services Administration has authorized the use of this Commercial Item Description in preference to CO-V-185.

1. ABSTRACT

1.1 Abstract. This commercial item description covers electric vegetable peeling machines in the following styles and sizes:

Style 1 - Counter mounted
Size A - 15 pounds of potatoes per charge

Style 2 - Floor mounted
Size A - 15 pounds of potatoes per charge
Size B - 30 pounds of potatoes per charge
Size C - 50 pounds of potatoes per charge

1.2 CID based part identification number (PIN). A document based PIN to identify style and size of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The vegetable peeling machine shall consist of a cylinder having an abrasive or ribbed wall; a removable disc covered with an abrasive and/or lobes; an integral peel trap for style 2 machines or a peel trap basket for style 1 machines; a removable or hinged cylinder covering ring with an opening to permit loading and designed to prevent water

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

from splashing out during operation; a vegetable discharge outlet with hinged door and latch; a waste outlet located below the disc; a water sprayer to wash and flush the interior of the cylinder and the vegetables during operation; and an "On-Off" switch. When specified, a timer shall be provided which may be adjusted from increments of 15 seconds up to at least 4 minutes (see 5.2).

2.1.1 Style 1 peeling machines. Style 1 peeling machines shall be equipped with provisions for counter mounting.

2.1.2 Style 2 peeling machines. Style 2 peeling machines shall be supported by a base with adjustable legs with provisions for bolting the legs to the floor. When specified, style 2 peeling machines shall be furnished with a waste disposer with an "On-Off" switch (see 5.2).

2.1.3 Motors. Unless otherwise specified, peeling machines shall operate on nominal 208 V, three-phase, 60 Hz service (see 5.2). Capacitor-start motors shall be not less than 1/3 hp, 3/4 hp, and 1 hp for sizes A, B, and C machines respectively. The motor for the waste disposer shall be 1/2 hp minimum with a manual reset overload protection button.

2.1.4 Electrical wiring. Peeling machines shall be completely wired with provisions for a grounded permanent power supply by electric flexible conduit. When specified, peeling machines shall be furnished with a power cord at least 6 feet long and terminated with a NEMA three-prong grounding plug (see 5.2).

2.2 Standard compliance. The vegetable peeling machine shall comply with the applicable requirements of NSF International Standard No. 8 and UL Standard No. 73 or No. 763. The waste disposer shall conform to the applicable requirements of ASSE Standard No. 1009 (see 3.2).

2.3 User instructions ("Government unique" requirement). Unless otherwise specified, each peeling machine shall be equipped with a user's instruction plate. The instructions shall be in characters not less than 3/32 inch high and except the words "VEGETABLE PEELER" shall be not less than 3/16 inch high; the words "USER'S INSTRUCTIONS" shall be in characters not less than 1/8 inch high.

VEGETABLE PEELER

USER'S INSTRUCTIONS

1. Potatoes should be sorted to obtain uniform size and to eliminate foreign matter.

2. Start motor before loading.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

3. Turn on water. Use only sufficient water to rinse potatoes. Too much water will tend to soften potatoes.

4. Load machine to 3/4 of cylinder capacity. Do not overload.

5. To discharge peeled potatoes, simply open discharge door. Do not stop machine during peeling operation; allow it to run until machine is empty.

6. Scrub abrasive wall and disc with stiff fiber brush after each use. Rinse abrasive wall and non-removable parts with hot water. Sanitize with additive free stream (21 CFR 173.310) or spraying with a chemical sanitizing solution of 100 parts per million (ppm) of available chlorine or 25 ppm of available iodine.

7. Flush bowl and peel trap thoroughly after cleaning. 1/

1/ When a style 1 or waste disposer is specified, the words "and peel trap" shall be removed.

2.4 Data nameplate ("Government unique" requirement). The vegetable peeling machine shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the vegetable peeling machine by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number (see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the vegetable peeling machine.

2.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.6 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.7 Workmanship. The finished vegetable peeling machine shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the vegetable peeling machine conforms to the requirements of NSF International Standard No. 8 and UL Standard No. 73 or No. 763 (see 2.2), and that the applicable components conform to ASSE Standard No. 1009 (see 2.2), and to the National Electrical Manufacturers Associations (see 2.1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.2.1 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 8 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.2 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 73 or No. 763 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 73 or No. 763.

3.2.3 National Electrical Manufacturers Association (NEMA). The contractor shall submit to the contracting officer a written certificate of compliance as proof of compliance that the vegetable peeling machine meets the applicable requirements of the NEMA.

3.2.4 American Society of Sanitary Engineering (ASSE). The contractor shall submit satisfactory evidence that the waste disposer conforms to the applicable requirements of ASSE Standard No. 1009.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each vegetable peeling machine shall be preserved, packaged, and packed in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each vegetable peeling machine shall be disassembled to the extent specified by the manufacturer to protect parts susceptible to damage during shipment and storage and for the reduction of cubage. Disassembly shall be such that special skills or special tools, other than those furnished, or both, are not required to place the vegetable peeling machines in operation. Disassembled parts shall be identified. The vegetable peeling machine and disassembled parts shall be preserved and cushioned to provide adequate protection against corrosion, deterioration, and damage during shipping and storage. Disassembled and detached parts shall be packaged in a snug-fitting fiberboard box conforming to PPP-B-636.

4.3.2 Export packing. Each vegetable peeling machine shall be packed in a snug-fitting, wood-cleated plywood box conforming to domestic type, style A or B, type 3 load of PPP-B-601. The contents of the box shall be cushioned, blocked, and braced to prevent movement and damage while in transit. Closure and strapping shall be in accordance with PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

4.4 Marking (commercial and export). Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The vegetable peeling machines covered by this commercial item description are intended for use in kitchens for peeling vegetables such as potatoes, carrots, and turnips.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating style and size required (see 1.1, 1.2, and 5.4).
c. Whether a timer is required (see 2.1).
d. Whether a waste disposer is required (see 2.1.2).
e. Electrical requirements if other than specified (see 2.1.3).
f. Whether a power cord is required (see 2.1.4).
g. Government approved manual number to be included on data nameplate (see 2.4).
h. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASSE Standard No. 1009 - Commercial Food Waste Disposer Units

ASSE documents are available from:

American Society of Sanitary Engineering (ASSE)
960 Illuminating Building
Cleveland, OH 44113

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NEMA documents are available from:

National Electrical Manufacturers Association (NEMA)
2101 L Street, NW
Washington, DC 20037

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

NSF International Standard No. 8 - Commercial Powered Food Preparation Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 73 - Motor-Operated Appliances
UL Standard No. 763 - Motor-Operated Commercial Food Preparing Machines


UL Standards are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

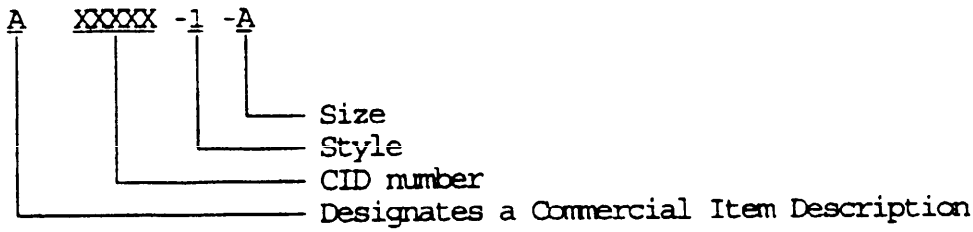

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

A-A-52138

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD, QM
Navy - CG, SH
Air Force - 50, 84
DLA - GS

User Activities

Navy - SA, MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7320-0903

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.