MIL-B-0036470A DM
13 March 1967
USED IN LIEU OF
MIL-B-36470
24 March 1966

MILITARY SPECIFICATION

BASKET, PIPET, PLASTIC

This limited coordination Military specification has been prepared by Defense Personnel Support Center based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of Military Specification MIL-B-36470. It is subject to modification. However, pending its promulgation as a coordinated Military specification, it may be used in procurement.

1.2 Classification.

1.2.1 Styles. Baskets shall be of the following styles:

Style A. with cutouts

Style B. with handle

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

L-P-390	Plastic, Molding Material, Polyethylene, Low and Medium Density.
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Setup.

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547 Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. PHARMACOPEIAL CONVENTION, INC.

Pharmacopeia of the United States

(Application for copies should be addressed to the Mack Publishing Company, Easton, Pa.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Polyethylene. Polyethylene for the basket shall be a low density, general purpose material in accordance with Type I, class L, grade 2 of L-P-390.

3.2 Construction. The basket shall be made of polyethylene and shall be in accordance with style A or B of figures 1 and 2 respectively. The basket shall include a means for lifting and carrying purposes, and shall have sufficient holes at the lower end to assure complete drainage. The rim at the open end shall be straight and even, and shall be perpendicular to the sides of the basket. The basket shall be stable when placed on a plane, level surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

3.2.1 Style A. Style A basket shall consist of a cylinder with a welded bottom and a foam plastic disc insert, and shall be in accordance with figure 1. Gusher holes shallbe provided at the lower end of the cylinder walls to assure complete drainage. Two cutouts shall be provided near the top of the cylinder for lifting and carrying purposes.

3.2.1.1 Foam disc. A removable, soft, pliable, polyethylene foam disc shall be provided to serve as cushioning for the tips of the pipets. The disc shall fit snugly on the inside bottom of the basket.

3.2.2 Style B. Style B basket shall consist of a polyethylene cylinder with a disc bottom and a handle, and shall be in accordance with figure 2. The disc bottom shall be welded to the inside walls at the lower end of the cylinder, and shall have sufficient perforations to assure complete drainage. A handle shall be provided to facilitate lifting and carrying, and a retaining disc shall be provided to keep pipets in place during the washing cycle.

3.2.2.1 Handle. The handle shall be a polyethylene handle, containing a steel rod to serve as reinforcement; handle shall be welded near the upper ends of vertical basket straps, and shall be positioned so as to keep the straps parallel to one another and in a vertical line with the sides of the basket. Welding at each end of the handle shall include at least one half the circumference of the handle.

3.2.2.2 Retaining disc. Retaining disc shall be a 5-3/4 diameter, 3/16 inch thick polyethylene disc with perforations, and shall serve as a suitable retaining barrier for pipets. The disc shall be designed so as to be positioned above the basket opening and be firmly held in place at two notched positions on the vertical straps. The retaining disc shall be readily capable of being moved up or down to the desired notched position. When set in the respective notched positions, the disc shall be perpendicular to the sides of the basket and shall show no warping.

3.3 Finish. All surfaces of the basket shall be smooth. Basket shall be free from rough and sharp edges, and corners shall be rounded. Welds shall be sound and shall be finished smoothly.

3.4 Identification marking. Basket shall be permanently and legibly marked with the name or registered trademark of the manufacturer.

3.5 Workmanship. Workmanship shall be first class throughout. Baskets shall be free from defects which detract from their appearance or may impair their serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties).

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	2.5
Minor defects	II	4.0
For dimensional examination	S-1	2.5

4.3 Examination. The baskets shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

	Categories and defects*
Major	
101	Component missing.
102	Basket not free of cracks and chips.
103	Basket not free of tears.
104	Basket not stable on a flat smooth surface.
105	Basket not free of deformation.
106	Base of basket (cylinder) not at right angles to the sides.
107	Foam disc not free of holes, cracks and tears.
108	Basket not free of sharp edges.
109	Straps not parallel and not in vertical line with sides of basket.
110	Retaining disc not firmly held in place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

Minor

201 Identification marking missing, illegible, or incomplete.
202 Disc not a snug fit at bottom of the basket.
203 Foam disc not free of deformation.
204 Rim at open end not straight and even, and not perpendicular to the sides.

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The baskets shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One basket, as specified, constitutes one unit of issue.

5.1.2 Packaging Quantities. The number of units of issue indicated in table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table I. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	NOT REQUIRED	6 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Unit package shall be a carton of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors shall be acceptable, or PPP-B-636. Closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in stndard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, table II using type III, class 1 plywood; PPP-B-621, table III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix, and waterproofing shall conform with 30.4, of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, table I, using type III, class 1 plywood; or shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 2 use ; PPP-B-621, table I; or PPP-B-636, type CF, class domestic and method I closure shall be utilized.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose constructed so as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Shall be suitable for use with JAR, PIPET, Plastic, FSN 6640-782-6007.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.

(b) Selection of applicable levels of packing (see 5.2).

6.3 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

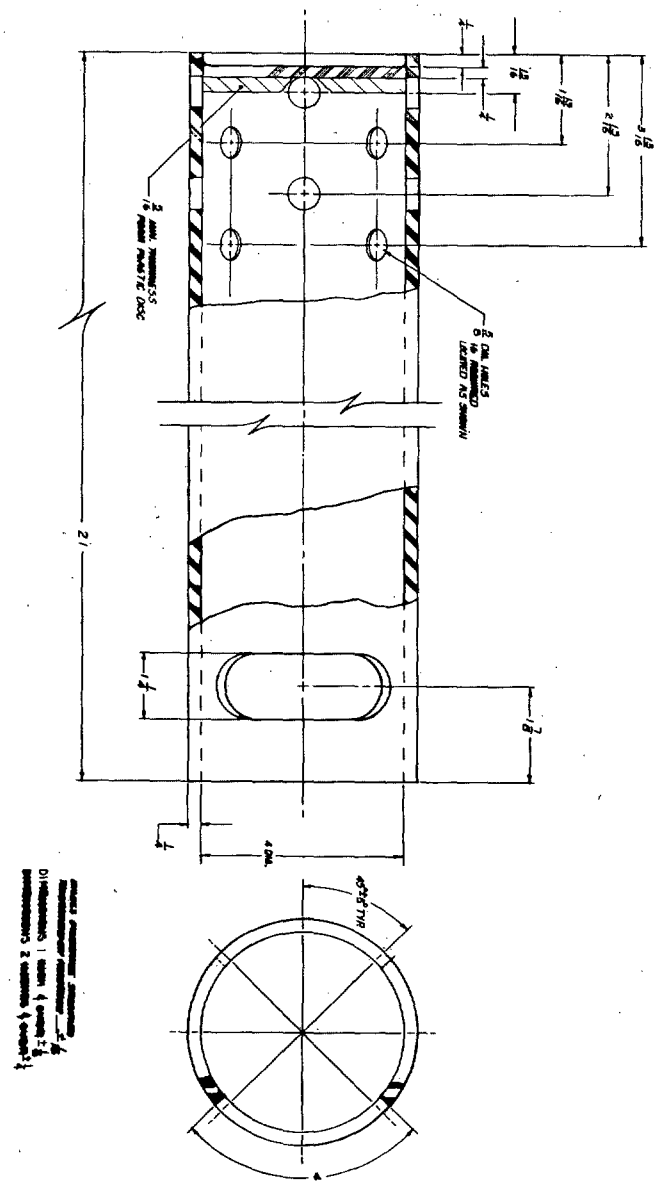


Figure 1. Pipet Basket. Style A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

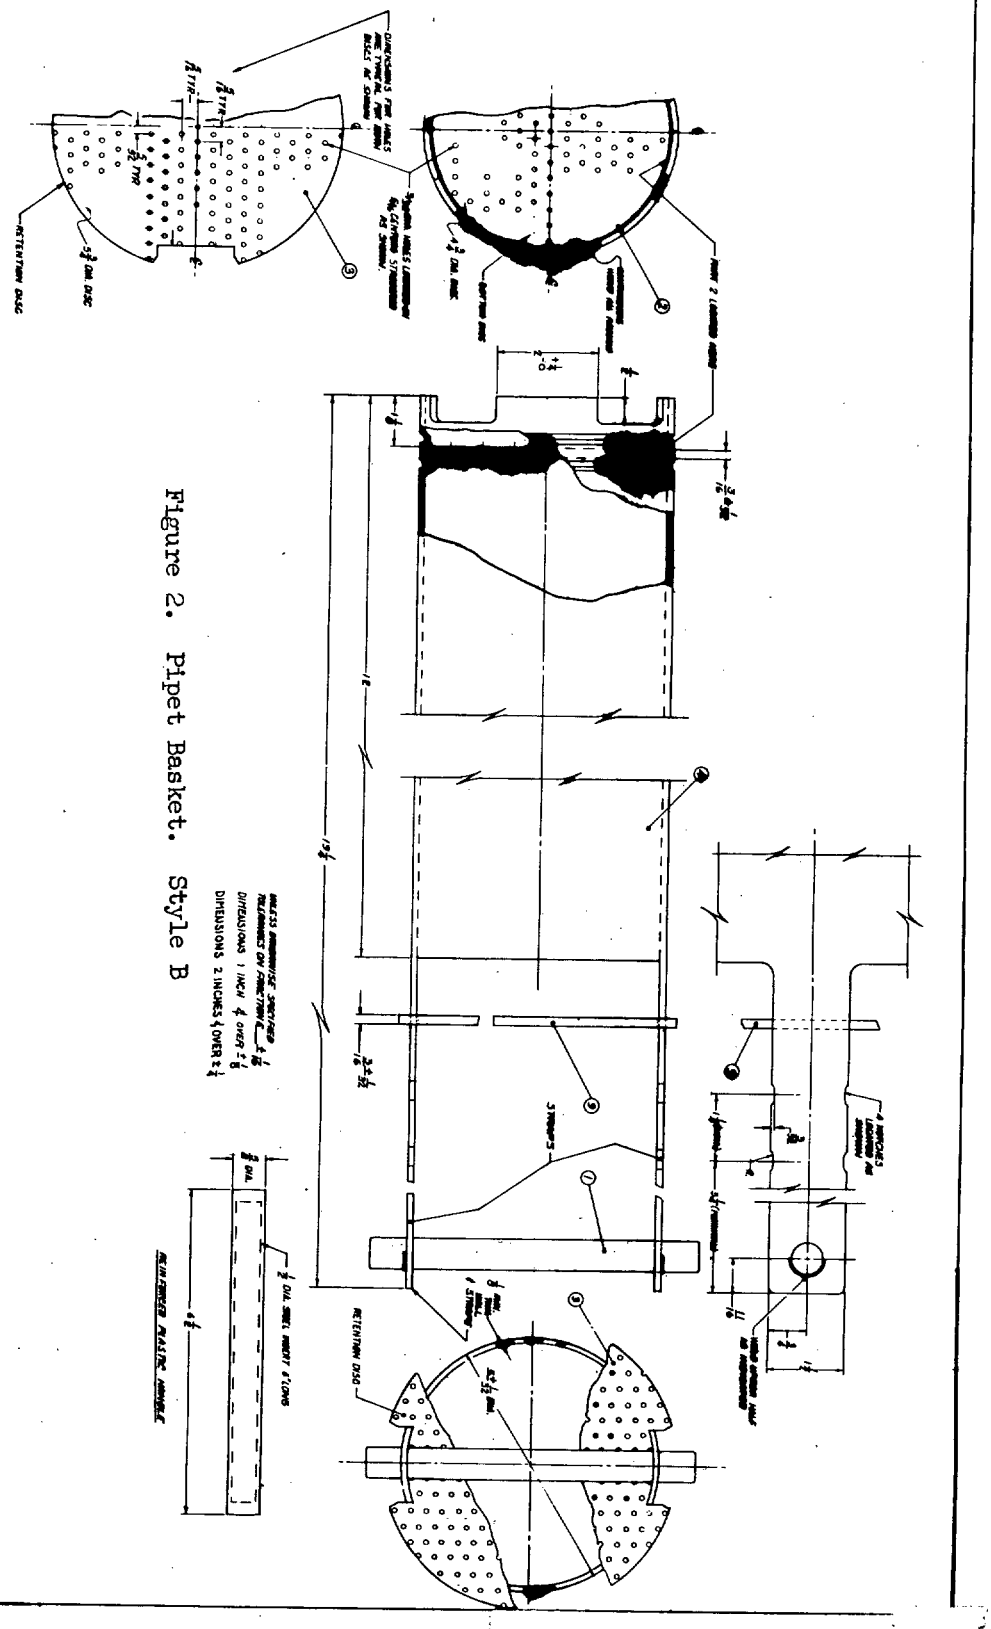


Figure 2. Pipet Basket. Style B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document. (s) or serve to amend contractual requirements .

SPECIFICATION

MIL-B-0036470A DM

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:39Z
Check the source to verify that this is the current version before use.