MIL-B-43420A
30 April 1970
SUPERSEDING
MIL-B-43420(GL)
28 March 1966

MILITARY SPECIFICATION

BASKETS, WOVEN WIRE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers woven wire metal baskets (see 6.1).

1.2 Classification.- Baskets shall be of the following sizes as specified (see 6.2):

Size 1 - 17 inches long by 7-3/4 inches wide by 8 inches high
Size 2 - 18 inches long by 18 inches wide by 8 inches high
Size 3 - 40 inches long by 18 inches wide by 8 inches high

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-630 - Steel, Bar, Carbon, Hot Rolled, (Merchant Quality)
QQ-S-634 - Steel, Bar, Carbon, Cold Finished, (Standard Quality)
PPP-B-636 - Box, Fiberboard

MILITARY

MIL-P-116 - Preservation, Methods Of
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible

FSC 7290

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

12-1-159 - Basket, Woven Wire, Size No. 1
12-1-160 - Basket, Woven Wire, Size No. 2
12-1-161 - Basket, Woven Wire, Size No. 3

(Miniature copies of Drawings 12-1-159, 12-1-160, and 12-1-161, identified as figures 1 through 3 respectively, are attached for information purposes only).

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

* 2.2 Other publications.- The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for woven wire baskets, provided the completed item complies with all provisions of this specification.

* 3.1.1 Steel rounds, angles and flats.- Steel rounds, angles and flats shall be hot rolled steel bar conforming to grade M-1020 of QQ-S-630 or cold finished bar conforming to grade 1020 of QQ-S-634.

* 3.2 Construction.- The baskets shall consist of double crimp, square mesh, steel wire cloth welded to the inside of a frame. Baskets shall be provided with handles. The size 1, size 2 and size 3 baskets shall conform to the design and dimensions of Drawings 12-1-159, 12-1-160, and 12-1-161, respectively. Steel angles for basket frames, steel rounds for basket handles, and steel flats for washers and straps shall conform to 3.1.1.

* 3.3 Welding.- The welds shall show good penetration in each welded part and shall be smooth, continuous, and free from cracks, porosity, or undercutting. Excess flux and spatter shall be removed. When tested as specified in 4.3.1, the baskets shall show no evidence of weld failure or deformation under the following loads: Size 1 basket - 100 pounds; size 2 basket - 200 pounds; size 3 basket - 400 pounds.

* 3.4 Marking for identification.- The manufacturer shall permanently and legibly mark his name or trademark of such know character as to be identifiable to the manufacturer on the basket.

* 3.5 Workmanship.- All surfaces shall be free of burrs, slivers, and rough or sharp edges. Components shall not be broken, cracked, or malformed. Handles for size 2 and size 3 baskets shall not bind.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 4.2 Inspection.- Sampling for inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

* 4.2.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.2.2 End item inspection.- A lot shall consist of all baskets of one size offered for inspection at one time. The sample unit for this inspection shall be one complete basket.

* 4.2.2.1 Visual examination.- Examination shall be made of the basket for defects set forth in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Visual examination of defects

Examine	Defect	Classification Major	Minor
Construction and workmanship	Wire cloth not double crimp, square mesh	X	
	Mesh not size specified	X	
	Wire cloth not welded inside frame	X	
	Handle missing	X	
	Handle binds (size 2 and size 3)		X
	Burr, sliver, rough or sharp edge	X	
	Component broken, cracked or malformed	X	
Welds	Weld missing, where required	X	
	Cracked, porous or undercut		X
	Not smooth or continuous	X	
	All excess flux or spatter not removed		X
Marking	Omitted, illegible, or incomplete		X
	Not permanent		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 4.2.2.2 Dimensional examination.- Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.2.2.3 Testing of the end item.- The end item shall be tested as specified in 4.4.1. The inspection level shall be S-1 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.2.3 Examination of preparation for delivery.- An examination shall be made to determine compliance with the preservation, packing and marking requirements of section 5. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examination	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Preservation	Preservative improperly applied or missing.
Materials	Components missing or damaged.
Contents	Number per container is more or less than specified.

* 4.2.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

* 4.3 Test.-

4.3.1 Weld test.- The baskets shall be loaded with the following evenly distributed minimum loads, as applicable: size 1-100 pounds; size 2-200 pounds;

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:22Z
Check the source to verify that this is the currentversion before use.

size 3-400 pounds. The loaded basket shall be lifted by the handle with a spreader type vertical lift beam for size 1 basket, a minimum of 6 inches and suspended for not less than 5 minutes. Evidence of weld failure or weld deformation shall constitute a defect.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation.- Preservation shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Each basket shall be cleaned process C-1, thoroughly dried and coated with P-7 or P-9 preservative in accordance with MIL-P-116. Each basket shall then be wrapped in greaseproof barrier material conforming to type II, grade A, class 1 or 2 of MIL-B-121, and the barrier material secured with tape, cord, or twine.

* 5.1.2 Level C.- Baskets shall be preserved to afford adequate protection against corrosion during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

* 5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A.- Four size 1 baskets, or two size 2 baskets, or one size 3 basket, preserved as specified in 5.1, shall be packed in the most compact manner in a snug fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Closure, waterproofing by means of tape and reinforcing shall be in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Four size 1 baskets, or two size 2 baskets, or one size 3 basket preserved as specified in 5.1, shall be packed in the most compact manner in a snug-fitting fiberboard shipping container conforming to type CF, variety SW, or type SF, class domestic, grade 275, style RSC of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

* 5.2.3 Level C.- Baskets, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as required.

* 5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The baskets covered by this specification are intended for use in depot maintenance automotive shops and cleaning stations for transporting of parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
(d) Whether weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Air Force - 84

User activity:


Navy - MC

Preparing activity:


Army - GL

Project No. 7290-0033

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:22Z
Check the source to verify that this is the current version before use.

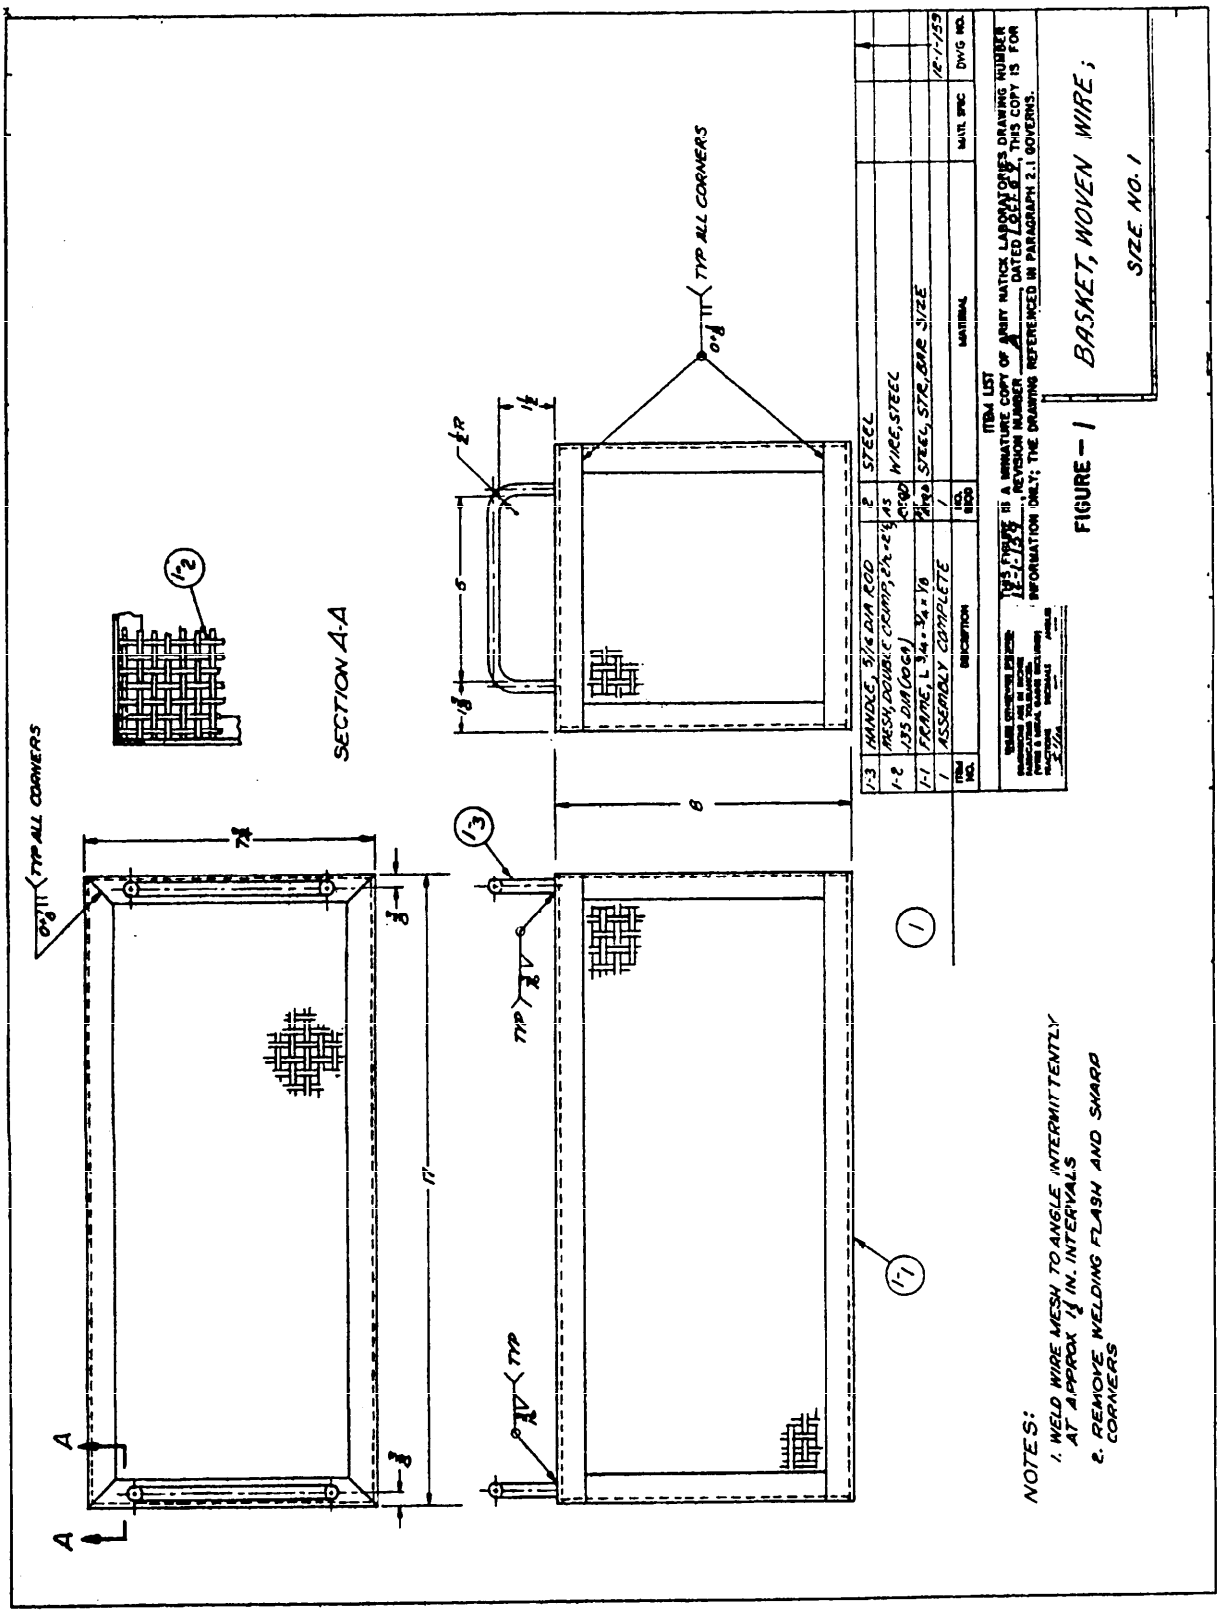

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:22Z
Check the source to verify that this is the current version before use.

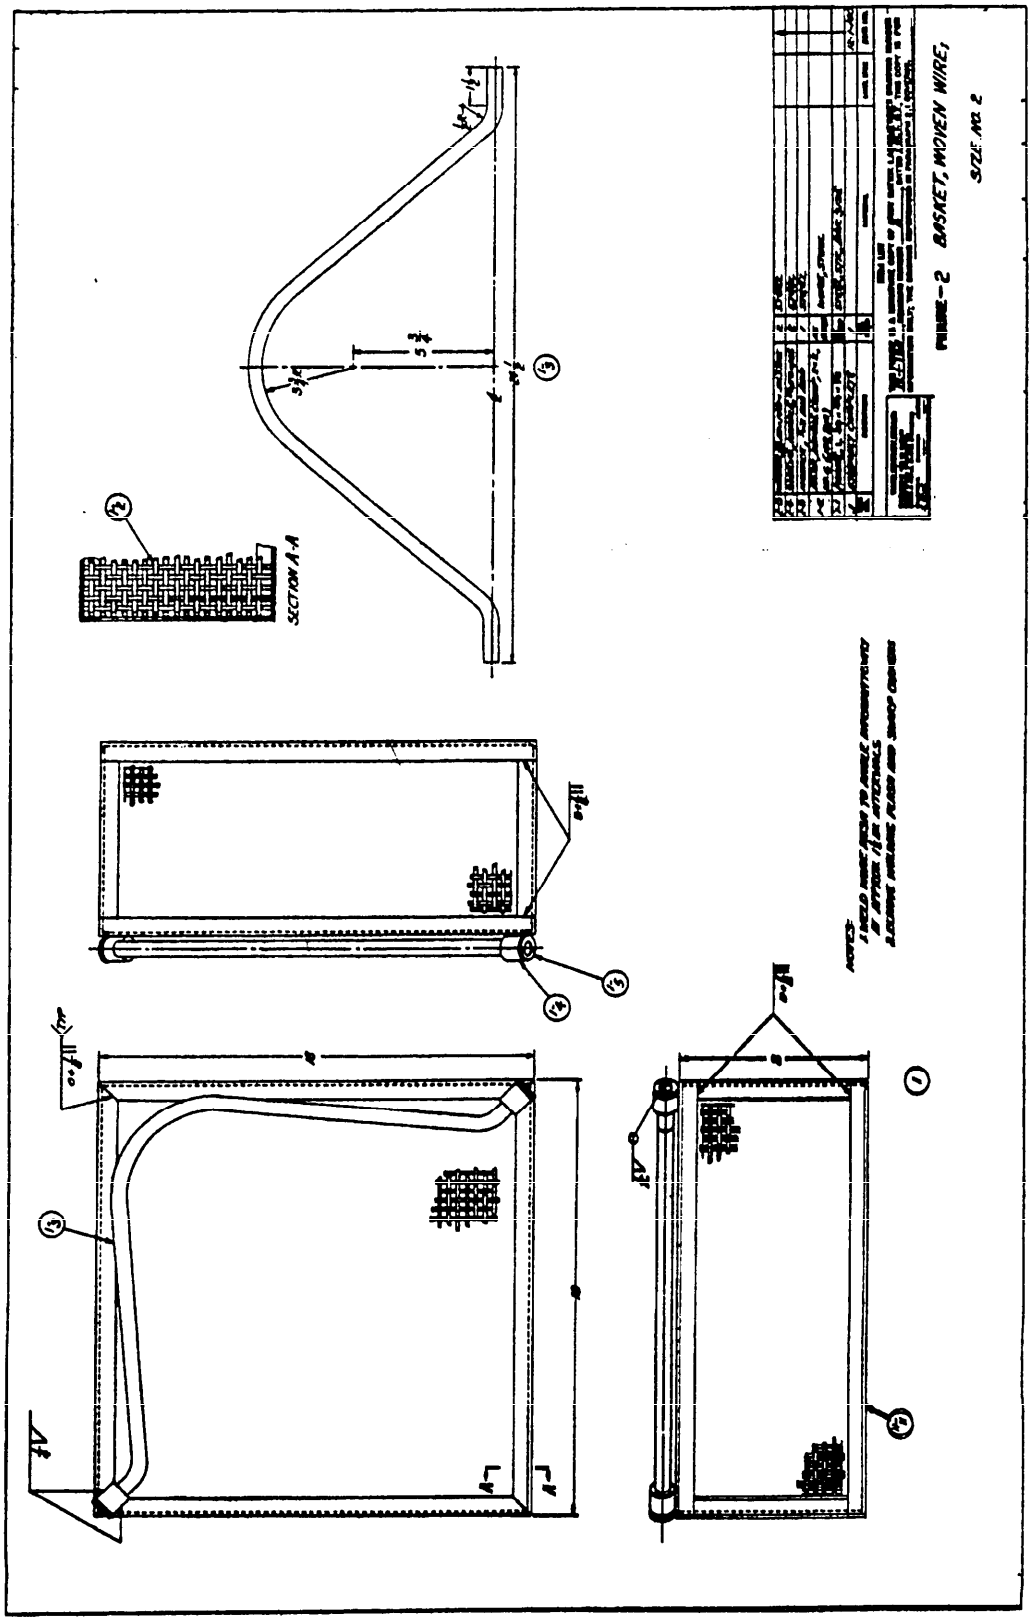

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

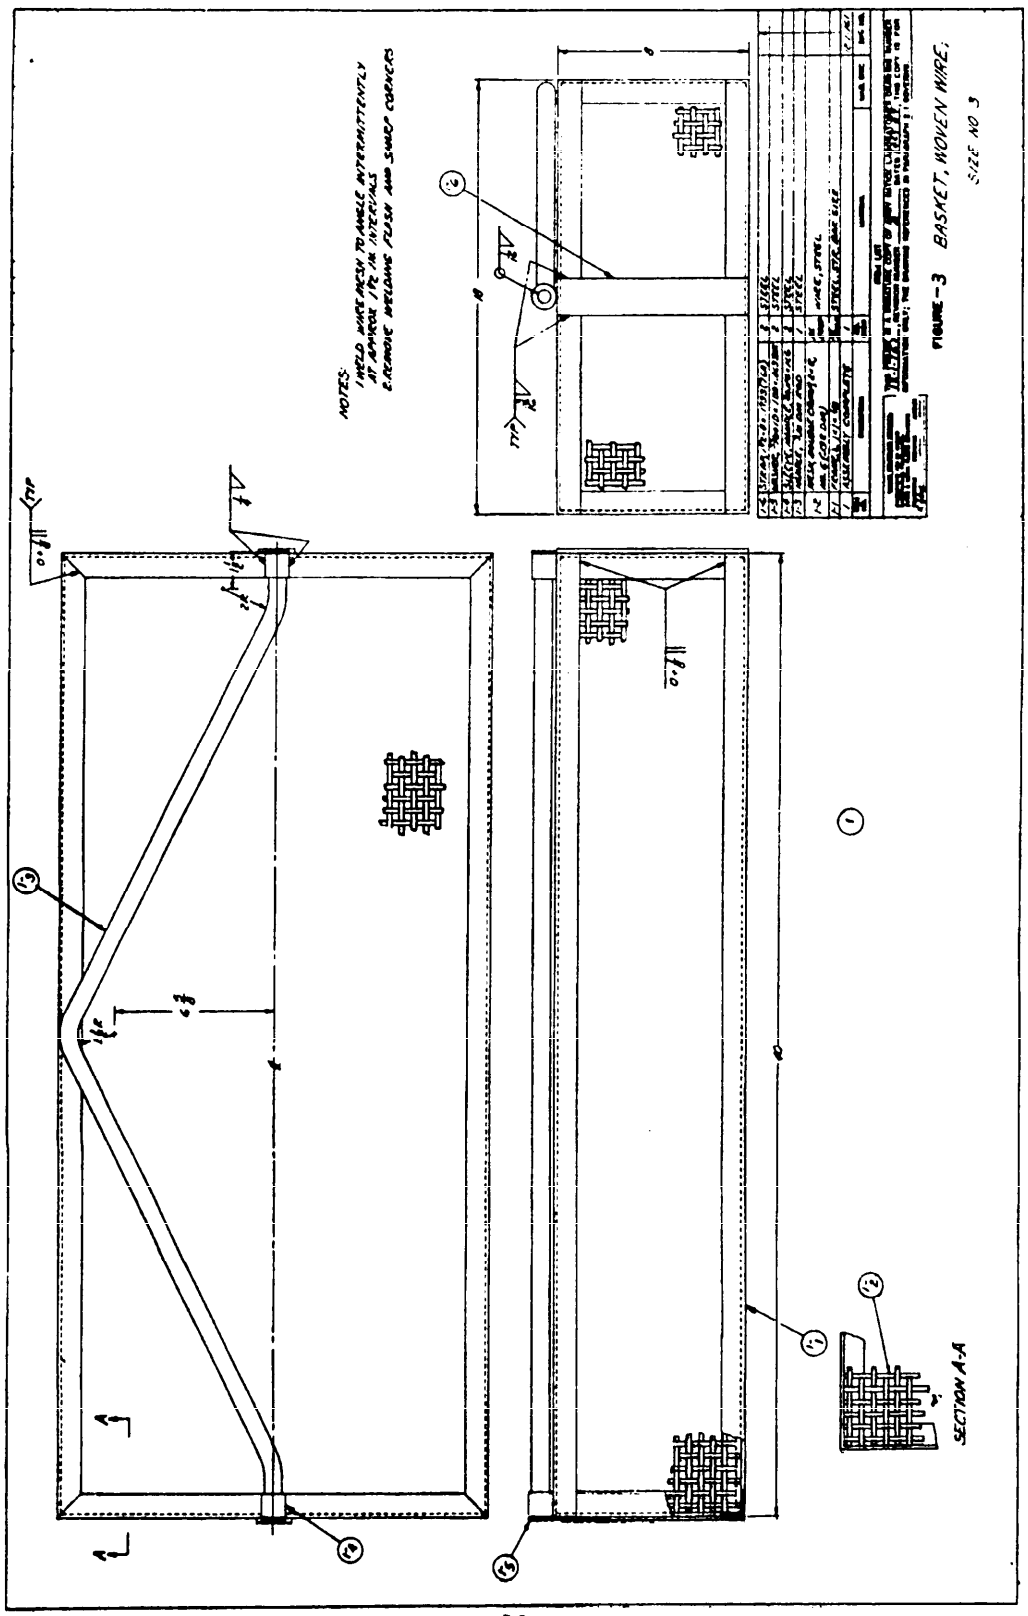


FIGURE-3 BASKET, WOVEN WIRE; SIZE NO 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-B-43420A - BASKETS, WOVEN WIRE

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.