INCH-POUND
MIL-DTL-1183/3B
w/AMENDMENT 1
20 August 2019
SUPERSEDING
MIL-DTL-1183/3B
20 December 2016

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; COUPLING, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Coupling type. Regular couplings shall be Type A (streamlined interior).

2. Slip coupling type. Slip couplings shall be made from Type B (interior not streamlined) couplings and reamed through to dimension "J" of figure 2 in MIL-DTL-1183.

3. End-to-end dimensions. The end-to-end dimensions for couplings and slip couplings are given in table I. The tolerance on the end-to-end dimensions "A" (see figure 1) shall be twice the tolerance given in table IV of MIL-DTL-1183 for the applicable nominal pipe size.

TABLE I. End-to-end dimensions, inches.

Nominal pipe size	A
¼	0.97
⅜	1.05
½	1.29
¾	1.43
1	1.68
1¼	1.86
1½	1.92
2	2.20
2½	2.88
3	3.18
3½	3.43
4	3.69
5	4.22
6	4.75
8	5.75
10	6.50
12	7.00

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

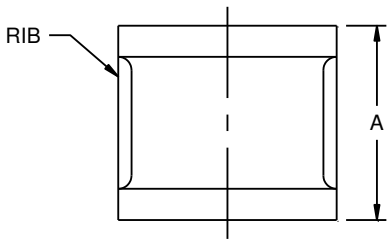


FIGURE 1. Coupling.

4. Ribs. Couplings and slip couplings may be furnished with or without ribs.

5. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/3 for MIL-DTL-1183/3) with a dash after it, the coupling style and pipe size code number, the brazing ring groove and code letter, and an optional dash and lead-free fitting identifier. Couplings covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

M1183/3 – XX X - PW

Specification sheet code number

Coupling style and pipe size code number (see requirement 6 herein)

Brazing ring groove and brazing ring code letter (see requirement 7 herein)

Lead-free fitting identifier (optional) (see 3.2 of MIL-DTL-1183)

6. Coupling style and pipe size. The coupling style (coupling or slip coupling) and nominal pipe size are identified by two digits (see table II).

TABLE II. Code number to style and size.

Coupling	Slip coupling	Nominal pipe size (inches)
01	21	¼
02	22	⅜
03	23	½
04	24	¾
05	25	1
06	26	1¼
07	27	1½
08	28	2
09	29	2½
10	30	3
11	31	3½
12	32	4
13	33	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE II. Code number to style and size – Continued.

Coupling	Slip coupling	Nominal pipe size (inches)
14	34	6
15	35	8
16	36	10
17	37	12

7. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing rings separately packaged and attached to the coupling, or grooved with brazing rings separately packaged and shipped with but not attached to the coupling socket ends are identified by a single letter (see table III).

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
A 2/	Grooved with brazing ring separately packaged and attached
S 1/ 2/	Grooved with brazing ring separately packaged and shipped with

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for coupling with the code letter of G, R, or S.

2/ When the socket condition code letter is A or S, the brazing rings shall not be inserted in the grooves, but shall be packaged separately. For condition code letter A, the packaged brazing ring shall be either included within each individual coupling package or physically attached to the coupling. For condition code letter S, the brazing ring shall be included within each individual coupling package.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army – CR4
Navy – SH

Review activity:
DLA – CC

Preparing activity:
Navy – SH
(Project 4730-2019-023)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.