FED. SUP CLASS
5305

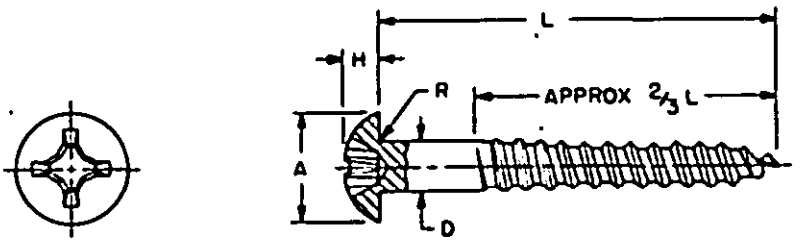


TABLE I

NOMINAL SIZE		2	3*	4	5*	6	7*	8	9*	10	12	14	16
D SCREW DIA	BASIC	.086	.099	.112	.125	.138	.151	.164	.177	.190	.216	.242	.268
	MAX	.090	.103	.116	.129	.142	.155	.168	.181	.194	.220	.246	.272
	MIN	.079	.092	.105	.118	.131	.144	.157	.170	.183	.209	.235	.261
A HEAD DIA	MAX	.162	.187	.211	.236	.260	.285	.309	.334	.359	.408	.457	.506
	MIN	.146	.169	.193	.217	.240	.264	.287	.311	.334	.382	.429	.476
H HEAD HEIGHT	MAX	.069	.078	.086	.095	.103	.111	.120	.128	.137	.153	.170	.187
	MIN	.059	.067	.075	.083	.091	.099	.107	.115	.123	.139	.155	.171
R FILLET RADIUS	MAX	.02	.02	.02	.03	.03	.03	.03	.03	.03	.03	.05	.05
DRIVER SIZE		1	1	1	2	2	2	2	2	2	3	3	3
THREADS PER INCH		26	24	22	20	18	16	15	14	13	11	10	9

(E) * Inactive, see sheet 2.

NOTES:

1. MATERIAL: Carbon steel, 1010 thru 1022 or 1108 thru 1118 in accordance with QQ-S-631, QQ-S-634, QQ-S-637 or QQ-W-405.
   (E) Brass, alloy no. 260 or 268, quarter-hard in accordance with QQ-B-613 or QQ-B-626; or alloy no. 260 or 270, quarter-hard in accordance with QQ-W-321.
2. PROTECTIVE COATING: Steel - Cadmium plated in accordance with QQ-P-416, Type II, Class 3 or MIL-C-81562, Type II, Class 3; or zinc coated in accordance with QQ-Z-325, Type II, Class 3 or MIL-C-81562, Type II, Class 3.
   (E) Brass - Plain, uncoated.
3. THREADS: Maximum permissible variation in number of threads per inch shall be plus or minus 10 percent.
4. RECESS: The recess shall be in accordance with MS9006.
5. DIMENSIONS: All dimensions are in inches.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35493-1.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(E) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEWER: AV, EA, IS, MI, AT, MC, ME, MU, PA, SH, VT
USER:

APPROVED 4 DEC 1958 REVISED (A) 18 OCT 1966 (B) 15 DEC 1966 (C) 1 JUN 1967 (D) 20 MAY 1968 (E) 15 AUG 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. VC Other Cust YD 82	TITLE SCREW, WOOD, ROUND HEAD, CROSS-RECESSED, STEEL AND BRASS	MILITARY STANDARD MS 35493
PROCUREMENT SPECIFICATION FF-S-111	SUPERSEDES AN545 in part and FNNN2.1, 2.2, 6, 6.1, 6.2 and 6.3	SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE II

STEEL, CADMIUM OR ZINC PLATED

NOMINAL SIZE L LENGTH	TOL.	2 DASH NO.	3 DASH NO.*	4 DASH NO.	5 DASH NO.*	6 DASH NO.	7 DASH NO.*	8 DASH NO.	9 DASH NO.*	10 DASH NO.	12 DASH NO.	14 DASH NO.	16 DASH NO.
.25	+.00 -.03	1		13									
.38		2	8	14	23	32		50					
.50		3	9	15	24	33	43	51		74			
.62		4	10	16	25	34	44	52		75	88		
.75	+.00 -.05	5	11	17	26	35	45	53	65	76	89	101	
.88				18	27	36	46	54	66	77	90	102	
1.00				19	28	37	47	55	67	78	91	103	112
1.25				20		38	48	56	68	79	92	104	113
1.50				21		39	49	57	69	80	93	105	114
1.75	+.00 -.06					40		58	70	81	94	106	115
2.00						41		59	71	82	95	107	116
2.25						42		60		83	96	108	117
2.50						901		61		84	97	109	118
2.75								62		85	98	110	119
3.00	+.00 -.09							63		86	99	111	120
3.50										87	100	903	121
4.00											902	904	122
4.50												905	123
5.00												906	124

TABLE III

BRASS, PLAIN, UNCOATED

NOMINAL SIZE L LENGTH	TOL.	2 DASH NO.	3 DASH NO.*	4 DASH NO.	5 DASH NO.*	6 DASH NO.	7 DASH NO.*	8 DASH NO.	9 DASH NO.*	10 DASH NO.	12 DASH NO.	14 DASH NO.
.25	+.00 -.03	201		206								
.38		202	910	207	215	223	232					
.50		203	911	208	216	224	233	242				
.62		204	912	209	217	225	234	243		261		
.75	+.00 -.05	205	913	210	218	226	235	244	253	262	273	
.88				211	219	227	236	245	254	263	274	
1.00				212	220	228	237	246	255	264	275	286
1.25						229	238	247	256	265	276	287
1.50						230	239	248	257	266	277	288
1.75	+.00 -.06							249	258	267	278	289
2.00								250	259	268	279	290
2.25										269	280	291
2.50										270	281	292
3.00	+.00 -.09										283	294
3.50											284	

* NOTE: Crossed-out dash numbers (sizes 3, 5, 7 and 9) are (E) INACTIVE FOR NEW DESIGN AFTER 15 August 1974.

INTERCHANGEABILITY

Steel, cadmium plated screws covered by dash numbers 501 thru 620 given in revision B of this standard are canceled after 1 June 1967. Brass, black oxide coated screws covered by dash numbers 701 thru 794 given in revision C of this standard and screws covered on AN545 in part are canceled after 20 May 1968. The canceled screws should be used for maintenance purposes until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with Table IV (see sheet 3).

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 DEC 1956 REVISED (D) 20 MAY 1968 (E) FOR CHANGES SEE SHEETS 1 AND 2.

P.A. WC
Other Cust YD 82

TITLE: SCREW, WOOD, ROUND HEAD, CROSS-RECESSED, STEEL AND BRASS

MILITARY STANDARD
MS 35493

PROCUREMENT SPECIFICATION: FF-S-111

SUPERSEDES: AN545 in part and BQDX2.1, 2.2, 6, 6.1, 6.2 and 6.3.

SHEET 2 OF 3

DD FORM 1 SEP 67 672-1 (Cancelled) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE IV - INTERCHANGEABILITY

PART NUMBER	
CANCELED	SUPSD BY
MS35493	MS35493
501	1
502	2
503	3
504	4
508	8
509	9
510	10
513	13
514	14
515	15
516	16
517	17
518	18
519	19
523	23
524	24
525	25
526	26
527	27
528	28
532	32
533	33
534	34
535	35
536	36
537	37
538	38
539	39
543	43
544	44
545	45
546	46
547	47
548	48
549	49
551	51
552	52
553	53
554	54
555	55
556	56
557	57
558	58
559	59
561	61
565	65
566	66
567	67
568	68
569	69
570	70
571	71
576	76
577	77
578	78
579	79
580	80
581	81
582	82
584	84
586	86
589	89

PART NUMBER	
CANCELED	SUPSD BY
MS35493	MS35493
590	90
591	91
592	92
593	93
594	94
595	95
597	97
599	99
603	103
604	104
605	105
606	106
607	107
609	109
611	111
616	116
618	118
620	120
701	201
702	202
703	203
706	206
707	207
708	208
709	209
710	210
711	211
712	212
715	215
716	216
717	217
718	218
719	219
720	220
723	223
724	224
725	225
726	226
727	227
728	228
729	229
730	230
733	233
734	234
735	235
736	236
737	237
738	238
739	239
742	242
743	243
744	244
745	245
746	246
747	247
748	248
749	249
750	250
753	253
754	254
755	255
756	256

PART NUMBER	
CANCELED	SUPSD BY
MS35493	MS35493
757	257
758	258
759	259
762	262
763	263
764	264
765	265
766	266
767	267
768	268
770	270
775	275
776	276
777	277
778	278
779	279
781	281
783	283
786	286
787	287
788	288
789	289
790	290
792	292
794	294

PART NUMBER	
AN545	MS35493
2R2	1
2R3	2
2R4	3
2R5	4
2R6	5
3R6	11
4R2	13
4R3	14
4R4	15
4R5	16
4R6	17
4R7	18
4R8	19
4R10	20
4R12	21
6R3	32
6R4	33
6R5	34
6R6	35
6R7	36
6R8	37
6R10	38
6R12	39
6R14	40
6R16	41
6R18	42
6R20	901
8R3	50
8R4	51
8R5	52
8R6	53
8R7	54

PART NUMBER	
CANCELED	SUPSD BY
AN545	MS35493
8R8	55
8R10	56
8R12	57
8R14	58
8R16	59
8R18	60
8R20	61
8R22	62
8R24	63
10R4	74
10R5	75
10R6	76
10R7	77
10R8	78
10R10	79
10R12	80
10R14	81
10R16	82
10R18	83
10R20	84
10R22	85
10R24	86
10R28	87
12R5	88
12R6	89
12R7	90
12R8	91
12R10	92
12R12	93
12R14	94
12R16	95
12R18	96
12R20	97
12R22	98
12R24	99
12R28	100
12R32	902
14R6	101
14R7	102
14R8	103
14R10	104
14R12	105
14R14	106
14R16	107
14R18	108
14R20	109
14R22	110
14R24	111
14R28	903
14R32	904
14R36	905
14R40	906
16R8	112
16R10	113
16R12	114
16R14	115
16R16	116
16R18	117
16R20	118
16R22	119
16R24	120
16R28	121

PART NUMBER	
CANCELED	SUPSD BY
AN545	MS35493
16R32	122
16R36	123
16R40	124
B2R2	201
B2R3	202
B2R4	203
B2R5	204
B2R6	205
B3R3	910
B3R4	911
B3R5	912
B3R6	913
B4R2	206
B4R3	207
B4R4	208
B4R5	209
B4R6	210
B4R7	211
B4R8	212
B5R3	215
B5R4	216
B5R5	217
B5R6	218
B5R7	219
B5R8	220
B6R3	223
B6R4	224
B6R5	225
B6R6	226
B6R7	227
B6R8	228
B6R10	229
B6R12	230
B8R4	242
B8R5	243
B8R6	244
B8R7	245
B8R8	246
B8R10	247
B8R12	248
B8R14	249
B8R16	250
B10R5	261
B10R6	262
B10R7	263
B10R8	264
B10R10	265
B10R12	266
B10R14	267
B10R16	268
B10R18	269
B10R20	270
B12R6	273
B12R7	274
B12R8	275
B12R10	276
B12R12	277
B12R14	278
B12R16	279
B12R18	280
B12R20	281
B12R24	283

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, VT

APPROVED 4 DEC 1956 REVISED (O) 20 MAY 1968 (E) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC
Other Coast YD
82

TITLE
SCREW, WOOD, ROUND HEAD, CROSS-RECESSED, STEEL AND BRASS

MILITARY STANDARD
MS 35493

PROCUREMENT SPECIFICATION
FF-S-111

SUPERSEDES: AN545 in part and BQDX2.1, 2.2, 6, 6.1, 6.2 and 6.3.

SHEET 3 OF 3

DD FORM 672-1

Source: https://assist.dla.mil - Downloaded: 2026-10-20T17:24Z
Check the source to verify that this is the current version before use.

GPO GOVERNMENT PRINTING OFFICE: 1974-603-69/1883